


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSEYP30-GX53W			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5N-H-GX53-HE140			否	0.63
器具光束	593 lm	最大取付間隔		器具効率	
光源	LED	AA	1.28H	上方向	1%
光源光束	750 lm	BB	1.29H	下方向	99%
				全方向	100%

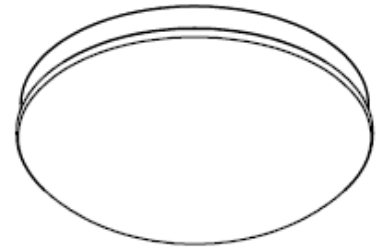


照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	44	41	30	29	23	22	18	43	40	30	29	23	22	18	29	28	22	22	18	22	22	18	22	18	16	
	0.6	61	56	46	44	37	36	30	59	55	45	43	37	35	30	43	42	36	35	30	35	34	30	35	34	28	
	0.8	71	64	56	52	46	44	38	69	63	55	51	45	44	38	52	50	44	43	38	43	42	37	43	42	35	
	1	80	72	65	60	55	52	46	77	70	63	59	54	51	46	61	57	52	51	45	51	50	45	51	50	42	
	1.25	88	78	74	68	64	60	54	85	78	72	67	63	60	54	69	65	61	58	53	59	57	53	59	57	50	
	1.5	93	82	80	73	70	65	59	90	80	78	72	69	65	59	74	69	66	63	58	64	62	58	64	62	55	
	2	101	88	89	80	80	73	68	97	86	87	79	79	73	67	82	77	75	71	66	72	70	66	72	70	63	
	2.5	107	92	96	85	88	79	74	103	90	93	84	86	78	74	88	82	82	77	73	78	75	72	78	75	69	
	3	110	95	101	88	93	83	78	106	93	98	87	91	82	78	92	85	86	81	77	82	79	76	82	79	73	
	4	115	98	107	93	101	89	85	111	96	104	92	98	88	84	97	89	93	86	82	88	84	81	88	84	78	
	5	118	100	112	96	106	92	89	113	98	108	95	103	91	88	101	92	97	89	86	92	87	85	92	87	82	
	7	122	102	117	99	112	96	94	117	101	113	98	108	95	93	105	95	102	93	91	96	91	89	96	91	86	
10	124	104	121	102	117	100	98	120	103	116	100	113	99	97	108	98	106	96	95	100	94	93	100	94	90		

配光曲線

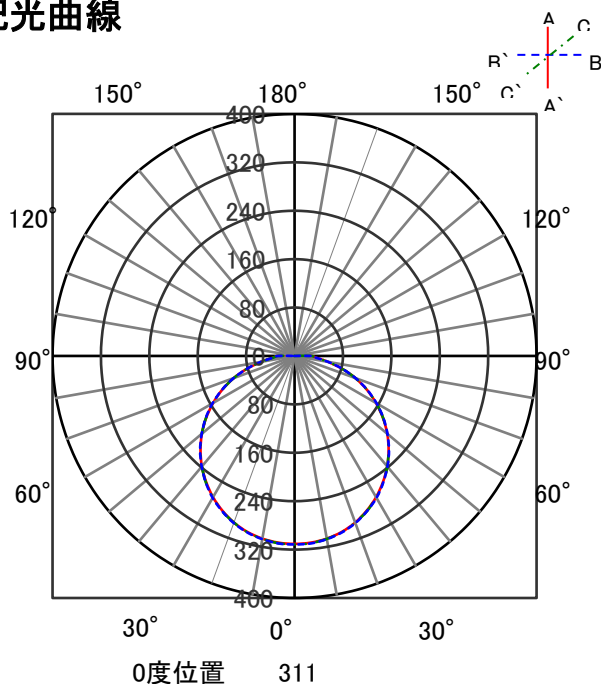


直射水平面照度

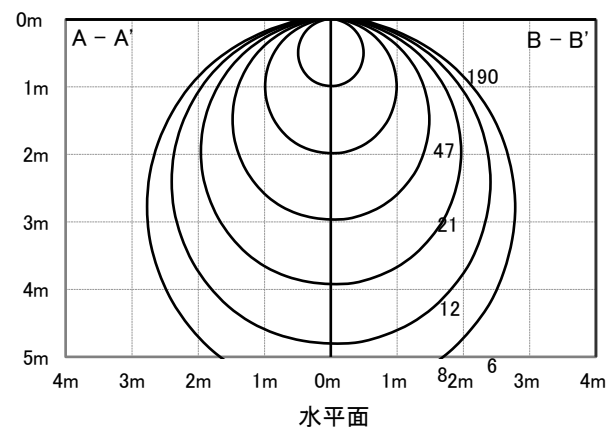

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSEYP30-GX53W			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5WW-H-GX53-HE140			否	0.63
				器具効率	
器具光束	593 lm	最大取付間隔		上方向	1%
光源	LED	AA	1.28H	下方向	99%
光源光束	750 lm	BB	1.29H	全方向	100%

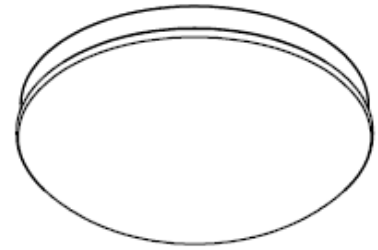


照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	44	41	30	29	23	22	18	43	40	30	29	23	22	18	29	28	22	22	18	22	22	18	22	18	16	
	0.6	61	56	46	44	37	36	30	59	55	45	43	37	35	30	43	42	36	35	30	35	34	30	35	34	28	
	0.8	71	64	56	52	46	44	38	69	63	55	51	45	44	38	52	50	44	43	38	43	42	37	43	42	35	
	1	80	72	65	60	55	52	46	77	70	63	59	54	51	46	61	57	52	51	45	51	50	45	51	50	42	
	1.25	88	78	74	68	64	60	54	85	76	72	67	63	60	54	69	65	61	58	53	59	57	53	59	57	50	
	1.5	93	82	80	73	70	65	59	90	80	78	72	69	65	59	74	69	66	63	58	64	62	58	64	62	55	
	2	101	88	89	80	80	73	68	97	86	87	79	79	73	67	82	77	75	71	66	72	70	66	72	70	63	
	2.5	107	92	96	85	88	79	74	103	90	93	84	86	78	74	88	82	82	77	73	78	75	72	78	75	69	
	3	110	95	101	88	93	83	78	106	93	98	87	91	82	78	92	85	86	81	77	82	79	76	82	79	73	
	4	115	98	107	93	101	89	85	111	96	104	92	98	88	84	97	89	93	86	82	88	84	81	88	84	78	
	5	118	100	112	96	106	92	89	113	98	108	95	103	91	88	101	92	97	89	86	92	87	85	92	87	82	
	7	122	102	117	99	112	96	94	117	101	113	98	108	95	93	105	95	102	93	91	96	91	89	96	91	86	
10	124	104	121	102	117	100	98	120	103	116	100	113	99	97	108	98	106	96	95	100	94	93	100	94	90		

配光曲線

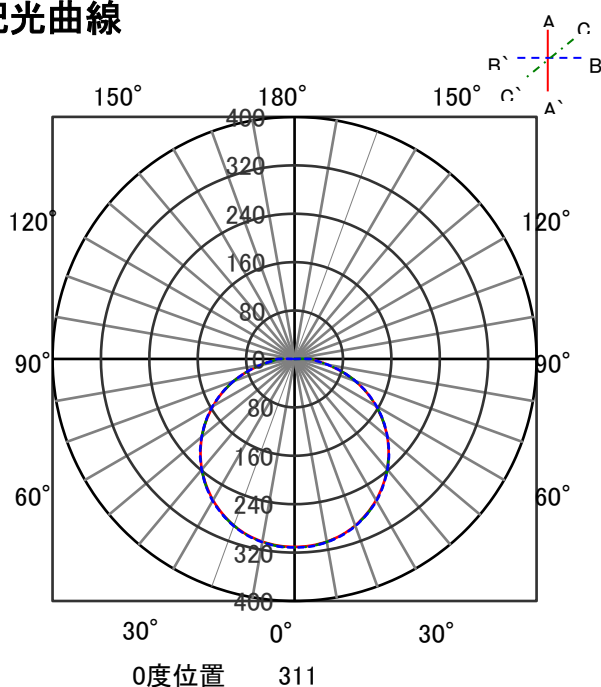


直射水平面照度

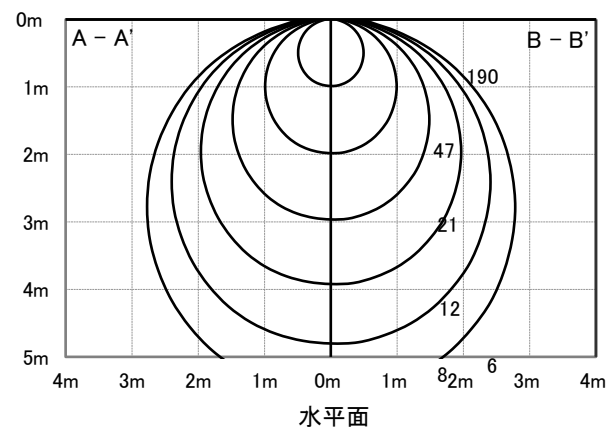

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSEYP30-GX53W			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5L-H-GX53-HE140			否	0.63
器具光束	593 lm	最大取付間隔		器具効率	
光源	LED	AA	1.28H	上方向	1%
光源光束	750 lm	BB	1.29H	下方向	99%
				全方向	100%

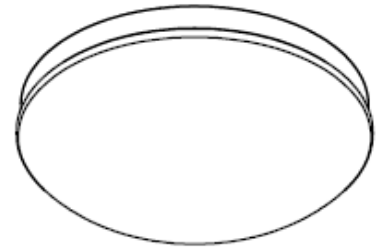


照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	44	41	30	29	23	22	18	43	40	30	29	23	22	18	29	28	22	22	18	22	22	18	22	22	18	16
	0.6	61	56	46	44	37	36	30	59	55	45	43	37	35	30	43	42	36	35	30	35	34	30	35	34	30	28
	0.8	71	64	56	52	46	44	38	69	63	55	51	45	44	38	52	50	44	43	38	43	42	37	43	42	37	35
	1	80	72	65	60	55	52	46	77	70	63	59	54	51	46	61	57	52	51	45	51	50	45	51	50	45	42
	1.25	88	78	74	68	64	60	54	85	78	72	67	63	60	54	69	65	61	58	53	59	57	53	59	57	53	50
	1.5	93	82	80	73	70	65	59	90	80	78	72	69	65	59	74	69	66	63	58	64	62	58	64	62	58	55
	2	101	88	89	80	80	73	68	97	86	87	79	79	73	67	82	77	75	71	66	72	70	66	72	70	66	63
	2.5	107	92	96	85	88	79	74	103	90	93	84	86	78	74	88	82	82	77	73	78	75	72	78	75	72	69
	3	110	95	101	88	93	83	78	106	93	98	87	91	82	78	92	85	86	81	77	82	79	76	82	79	76	73
	4	115	98	107	93	101	89	85	111	96	104	92	98	88	84	97	89	93	86	82	88	84	81	88	84	81	78
	5	118	100	112	96	106	92	89	113	98	108	95	103	91	88	101	92	97	89	86	92	87	85	92	87	85	82
	7	122	102	117	99	112	96	94	117	101	113	98	108	95	93	105	95	102	93	91	96	91	89	96	91	89	86
10	124	104	121	102	117	100	98	120	103	116	100	113	99	97	108	98	106	96	95	100	94	93	100	94	93	90	

配光曲線

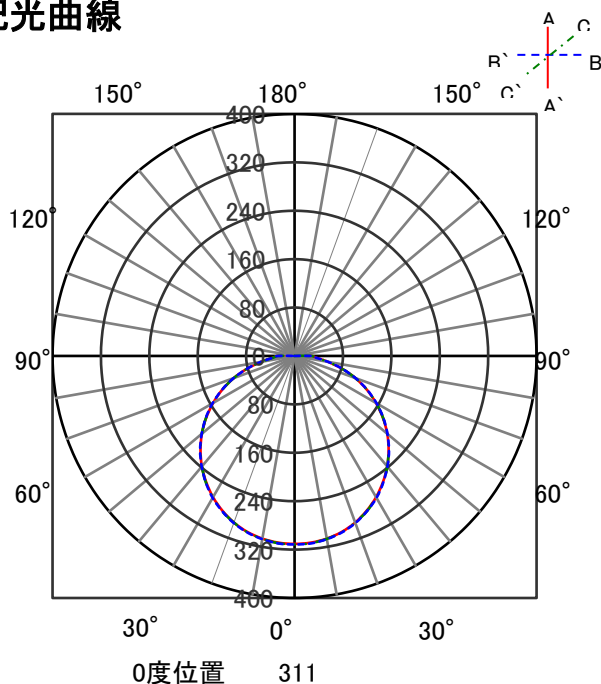


直射水平面照度

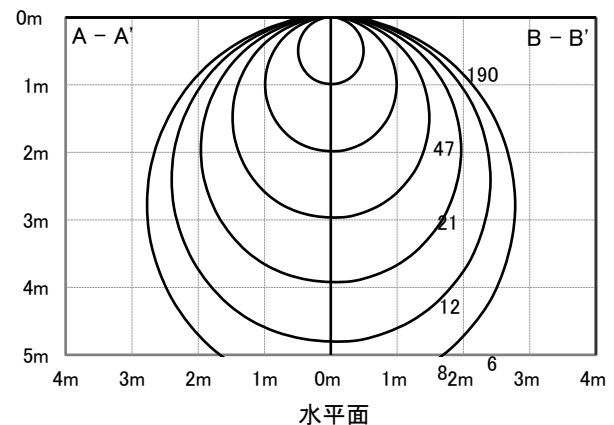

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSEYP30-GX53W			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF7N-H-GX53			否	0.63
器具光束	593 lm	最大取付間隔		器具効率	
光源	LED	AA	1.28H	上方向	1%
光源光束	750 lm	BB	1.29H	下方向	99%
				全方向	100%

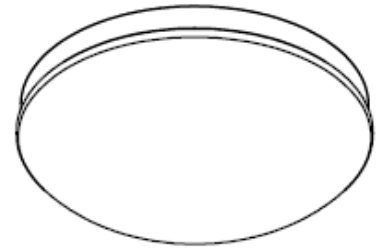


照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	44	41	30	29	23	22	18	43	40	30	29	23	22	18	29	28	22	22	18	22	22	18	22	18	16	
	0.6	61	56	46	44	37	36	30	59	55	45	43	37	35	30	43	42	36	35	30	35	34	30	34	30	28	
	0.8	71	64	56	52	46	44	38	69	63	55	51	45	44	38	52	50	44	43	38	43	42	37	42	37	35	
	1	80	72	65	60	55	52	46	77	70	63	59	54	51	46	61	57	52	51	45	51	50	45	50	45	42	
	1.25	88	78	74	68	64	60	54	85	76	72	67	63	60	54	69	65	61	58	53	59	57	53	59	57	50	
	1.5	93	82	80	73	70	65	59	90	80	78	72	69	65	59	74	69	66	63	58	64	62	58	64	62	55	
	2	101	88	89	80	80	73	68	97	86	87	79	79	73	67	82	77	75	71	66	72	70	66	72	70	63	
	2.5	107	92	96	85	88	79	74	103	90	93	84	86	78	74	88	82	82	77	73	78	75	72	78	75	69	
	3	110	95	101	88	93	83	78	106	93	98	87	91	82	78	92	85	86	81	77	82	79	76	82	79	73	
	4	115	98	107	93	101	89	85	111	96	104	92	98	88	84	97	89	93	86	82	88	84	81	88	84	78	
	5	118	100	112	96	106	92	89	113	98	108	95	103	91	88	101	92	97	89	86	92	87	85	92	87	82	
	7	122	102	117	99	112	96	94	117	101	113	98	108	95	93	105	95	102	93	91	96	91	89	96	91	86	
10	124	104	121	102	117	100	98	120	103	116	100	113	99	97	108	98	106	96	95	100	94	93	99	94	90		

配光曲線

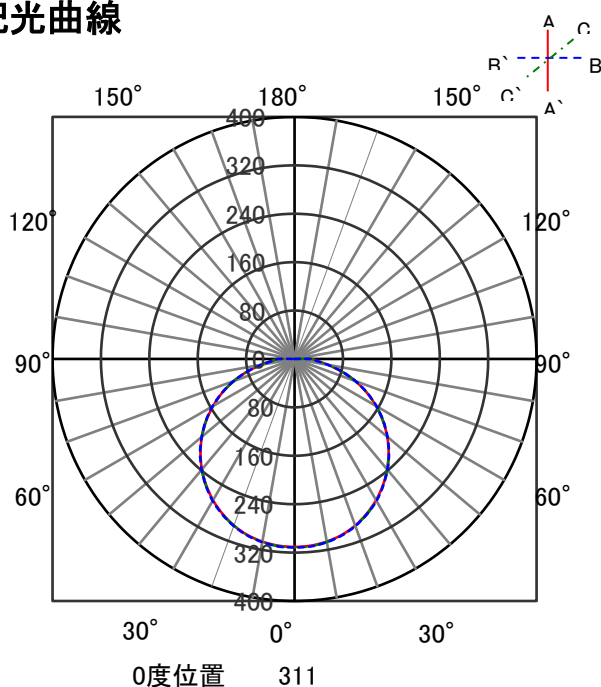


直射水平面照度

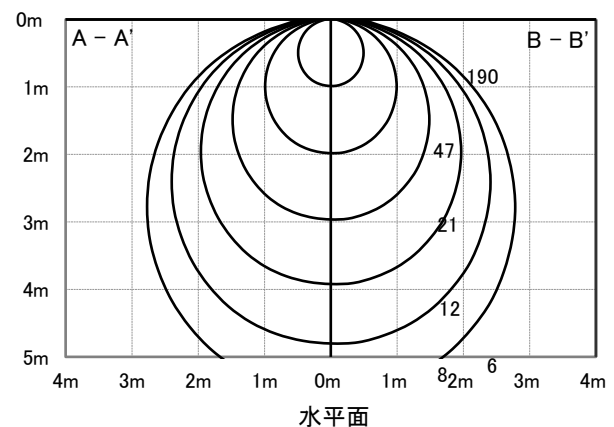

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSEYP30-GX53W			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF7WW-H-GX53			否	0.63
器具光束	593 lm	最大取付間隔		器具効率	
光源	LED	AA	1.28H	上方向	1%
光源光束	750 lm	BB	1.29H	下方向	99%
				全方向	100%

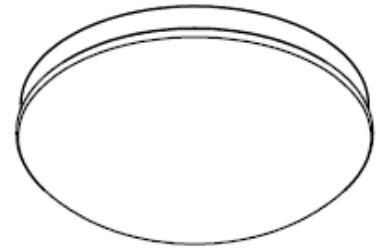


照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	44	41	30	29	23	22	18	43	40	30	29	23	22	18	29	28	22	22	18	22	22	18	22	22	18	16
	0.6	61	56	46	44	37	36	30	59	55	45	43	37	35	30	43	42	36	35	30	35	34	30	35	34	28	
	0.8	71	64	56	52	46	44	38	69	63	55	51	45	44	38	52	50	44	43	38	43	42	37	43	42	35	
	1	80	72	65	60	55	52	46	77	70	63	59	54	51	46	61	57	52	51	45	51	50	45	51	50	42	
	1.25	88	78	74	68	64	60	54	85	78	72	67	63	60	54	69	65	61	58	53	59	57	53	59	57	50	
	1.5	93	82	80	73	70	65	59	90	80	78	72	69	65	59	74	69	66	63	58	64	62	58	64	62	55	
	2	101	88	89	80	80	73	68	97	86	87	79	79	73	67	82	77	75	71	66	72	70	66	72	70	63	
	2.5	107	92	96	85	88	79	74	103	90	93	84	86	78	74	88	82	82	77	73	78	75	72	78	75	69	
	3	110	95	101	88	93	83	78	106	93	98	87	91	82	78	92	85	86	81	77	82	79	76	82	79	73	
	4	115	98	107	93	101	89	85	111	96	104	92	98	88	84	97	89	93	86	82	88	84	81	88	84	81	78
	5	118	100	112	96	106	92	89	113	98	108	95	103	91	88	101	92	97	89	86	92	87	85	92	87	85	82
	7	122	102	117	99	112	96	94	117	101	113	98	108	95	93	105	95	102	93	91	96	91	89	96	91	89	86
10	124	104	121	102	117	100	98	120	103	116	100	113	99	97	108	98	106	96	95	100	94	93	99	94	93	90	

配光曲線

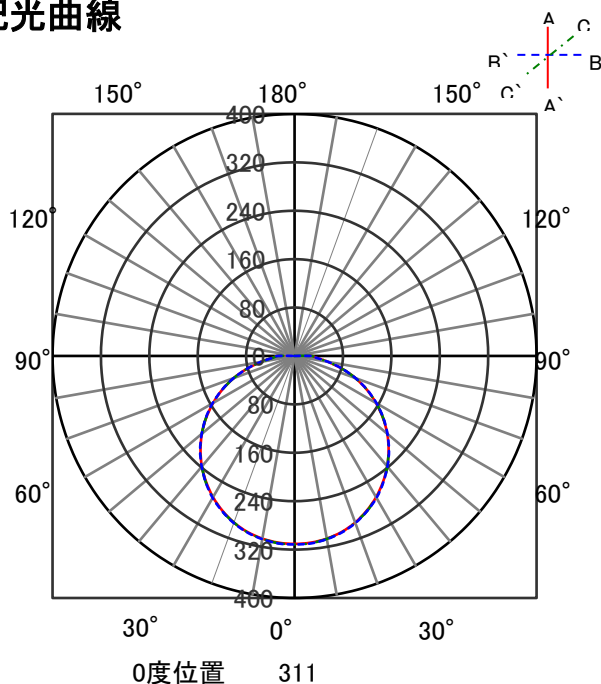


直射水平面照度

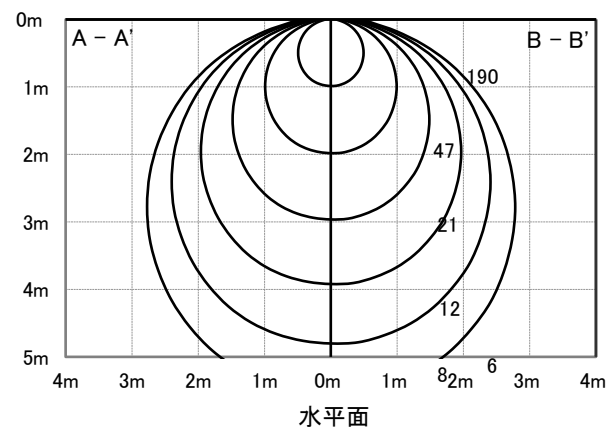

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSEYP30-GX53W			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF7L-H-GX53			否	0.63
器具光束	593 lm	最大取付間隔		器具効率	
光源	LED	AA	1.28H	上方向	1%
光源光束	750 lm	BB	1.29H	下方向	99%
				全方向	100%

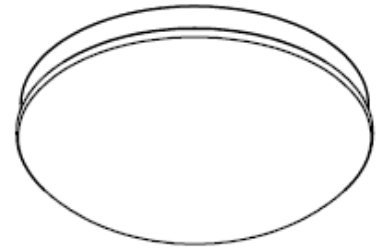


照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	44	41	30	29	23	22	18	43	40	30	29	23	22	18	29	28	22	22	18	22	22	18	22	22	18	16
	0.6	61	56	46	44	37	36	30	59	55	45	43	37	35	30	43	42	36	35	30	35	34	30	35	34	30	28
	0.8	71	64	56	52	46	44	38	69	63	55	51	45	44	38	52	50	44	43	38	43	42	37	43	42	37	35
	1	80	72	65	60	55	52	46	77	70	63	59	54	51	46	61	57	52	51	45	51	50	45	51	50	45	42
	1.25	88	78	74	68	64	60	54	85	76	72	67	63	60	54	69	65	61	58	53	59	57	53	59	57	53	50
	1.5	93	82	80	73	70	65	59	90	80	78	72	69	65	59	74	69	66	63	58	64	62	58	64	62	58	55
	2	101	88	89	80	80	73	68	97	86	87	79	79	73	67	82	77	75	71	66	72	70	66	72	70	66	63
	2.5	107	92	96	85	88	79	74	103	90	93	84	86	78	74	88	82	82	77	73	78	75	72	78	75	72	69
	3	110	95	101	88	93	83	78	106	93	98	87	91	82	78	92	85	86	81	77	82	79	76	82	79	76	73
	4	115	98	107	93	101	89	85	111	96	104	92	98	88	84	97	89	93	86	82	88	84	81	88	84	81	78
	5	118	100	112	96	106	92	89	113	98	108	95	103	91	88	101	92	97	89	86	92	87	85	92	87	85	82
	7	122	102	117	99	112	96	94	117	101	113	98	108	95	93	105	95	102	93	91	96	91	89	96	91	89	86
10	124	104	121	102	117	100	98	120	103	116	100	113	99	97	108	98	106	96	95	100	94	93	100	94	93	90	

配光曲線

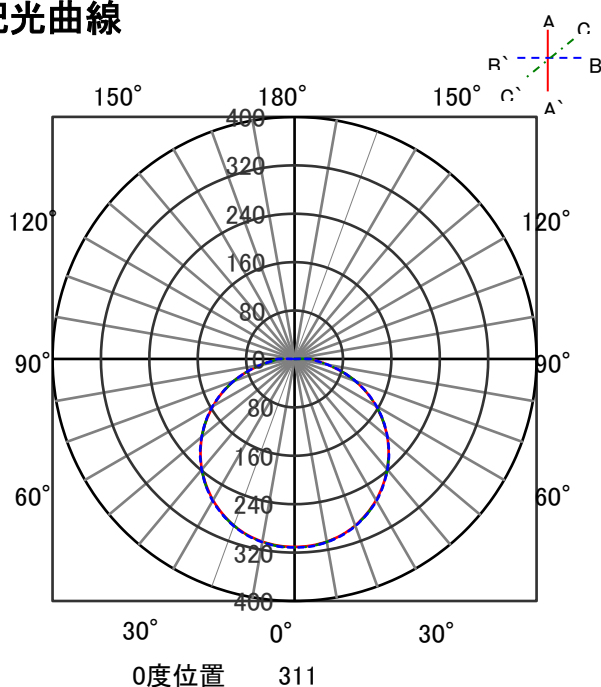


直射水平面照度

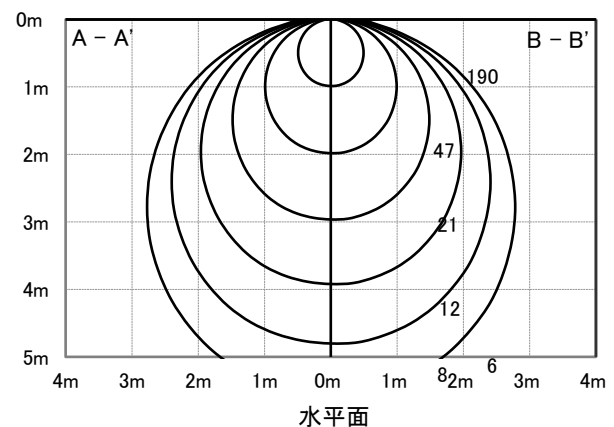

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSEYP30-GX53W			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF7N-H-GX53-D			否	0.63
				器具効率	
器具光束	593 lm	最大取付間隔		上方向	1%
光源	LED	AA	1.28H	下方向	99%
光源光束	750 lm	BB	1.29H	全方向	100%

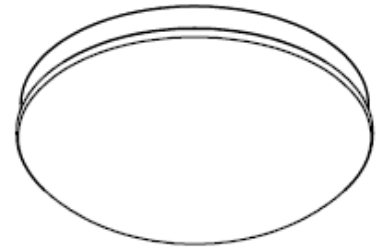


照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	44	41	30	29	23	22	18	43	40	30	29	23	22	18	29	28	22	22	18	22	22	18	22	22	18	16
	0.6	61	56	46	44	37	36	30	59	55	45	43	37	35	30	43	42	36	35	30	35	34	30	35	34	30	28
	0.8	71	64	56	52	46	44	38	69	63	55	51	45	44	38	52	50	44	43	38	43	42	37	43	42	37	35
	1	80	72	65	60	55	52	46	77	70	63	59	54	51	46	61	57	52	51	45	51	50	45	51	50	45	42
	1.25	88	78	74	68	64	60	54	85	76	72	67	63	60	54	69	65	61	58	53	59	57	53	59	57	53	50
	1.5	93	82	80	73	70	65	59	90	80	78	72	69	65	59	74	69	66	63	58	64	62	58	64	62	58	55
	2	101	88	89	80	80	73	68	97	86	87	79	79	73	67	82	77	75	71	66	72	70	66	72	70	66	63
	2.5	107	92	96	85	88	79	74	103	90	93	84	86	78	74	88	82	82	77	73	78	75	72	78	75	72	69
	3	110	95	101	88	93	83	78	106	93	98	87	91	82	78	92	85	86	81	77	82	79	76	82	79	76	73
	4	115	98	107	93	101	89	85	111	96	104	92	98	88	84	97	89	93	86	82	88	84	81	88	84	81	78
	5	118	100	112	96	106	92	89	113	98	108	95	103	91	88	101	92	97	89	86	92	87	85	92	87	85	82
	7	122	102	117	99	112	96	94	117	101	113	98	108	95	93	105	95	102	93	91	96	91	89	96	91	89	86
10	124	104	121	102	117	100	98	120	103	116	100	113	99	97	108	98	106	96	95	100	94	93	100	94	93	90	

配光曲線

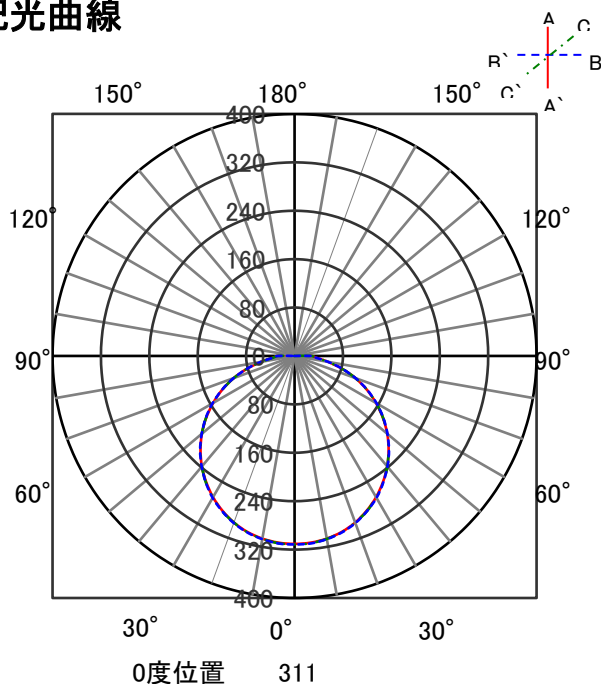


直射水平面照度

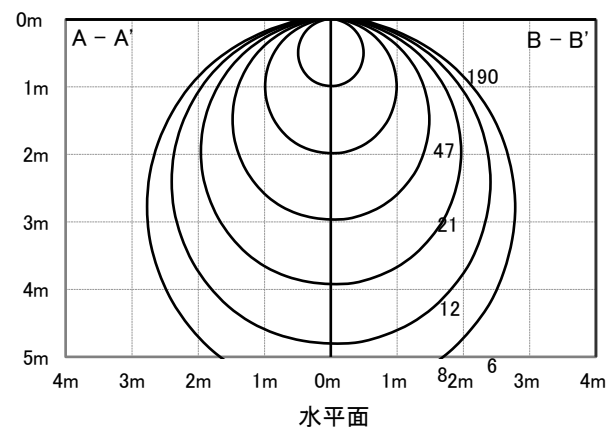

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSEYP30-GX53W			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF7WW-H-GX53-D			否	0.63
器具光束	593 lm	最大取付間隔		器具効率	
光源	LED	AA	1.28H	上方向	1%
光源光束	750 lm	BB	1.29H	下方向	99%
				全方向	100%

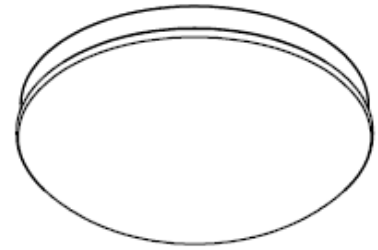


照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	44	41	30	29	23	22	18	43	40	30	29	23	22	18	29	28	22	22	18	22	22	18	22	18	16	
	0.6	61	56	46	44	37	36	30	59	55	45	43	37	35	30	43	42	36	35	30	35	34	30	35	34	28	
	0.8	71	64	56	52	46	44	38	69	63	55	51	45	44	38	52	50	44	43	38	43	42	37	43	42	35	
	1	80	72	65	60	55	52	46	77	70	63	59	54	51	46	61	57	52	51	45	51	50	45	51	50	42	
	1.25	88	78	74	68	64	60	54	85	76	72	67	63	60	54	69	65	61	58	53	59	57	53	59	57	50	
	1.5	93	82	80	73	70	65	59	90	80	78	72	69	65	59	74	69	66	63	58	64	62	58	64	62	55	
	2	101	88	89	80	80	73	68	97	86	87	79	79	73	67	82	77	75	71	66	72	70	66	72	70	63	
	2.5	107	92	96	85	88	79	74	103	90	93	84	86	78	74	88	82	82	77	73	78	75	72	78	75	69	
	3	110	95	101	88	93	83	78	106	93	98	87	91	82	78	92	85	86	81	77	82	79	76	82	79	73	
	4	115	98	107	93	101	89	85	111	96	104	92	98	88	84	97	89	93	86	82	88	84	81	88	84	78	
	5	118	100	112	96	106	92	89	113	98	108	95	103	91	88	101	92	97	89	86	92	87	85	92	87	82	
	7	122	102	117	99	112	96	94	117	101	113	98	108	95	93	105	95	102	93	91	96	91	89	96	91	86	
10	124	104	121	102	117	100	98	120	103	116	100	113	99	97	108	98	106	96	95	100	94	93	100	94	93	90	

配光曲線

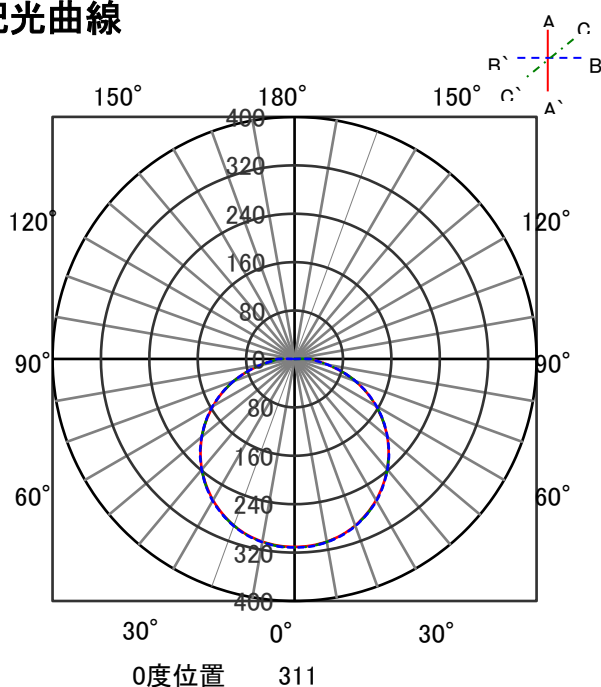


直射水平面照度

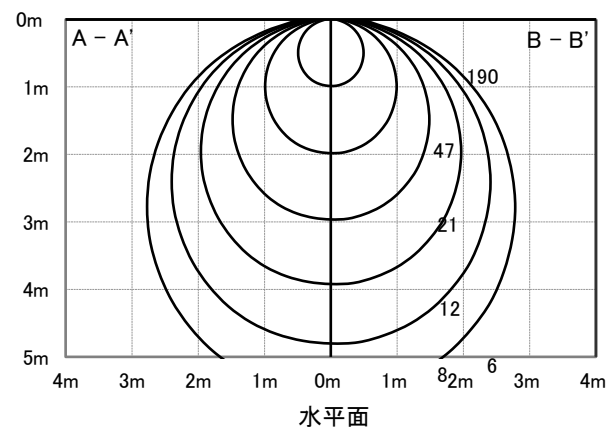

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSEYP30-GX53W			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF7L-H-GX53-D			否	0.63
器具光束	593 lm	最大取付間隔		器具効率	
光源	LED	AA	1.28H	上方向	1%
光源光束	750 lm	BB	1.29H	下方向	99%
				全方向	100%

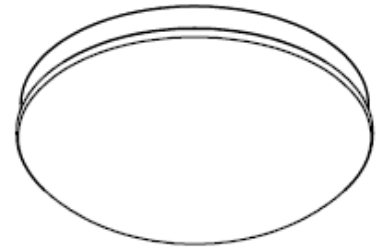


照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	44	41	30	29	23	22	18	43	40	30	29	23	22	18	29	28	22	22	18	22	22	18	22	18	16	
	0.6	61	56	46	44	37	36	30	59	55	45	43	37	35	30	43	42	36	35	30	35	34	30	35	34	28	
	0.8	71	64	56	52	46	44	38	69	63	55	51	45	44	38	52	50	44	43	38	43	42	37	42	37	35	
	1	80	72	65	60	55	52	46	77	70	63	59	54	51	46	61	57	52	51	45	51	50	45	50	45	42	
	1.25	88	78	74	68	64	60	54	85	78	72	67	63	60	54	69	65	61	58	53	59	57	53	59	57	50	
	1.5	93	82	80	73	70	65	59	90	80	78	72	69	65	59	74	69	66	63	58	64	62	58	64	62	55	
	2	101	88	89	80	80	73	68	97	86	87	79	79	73	67	82	77	75	71	66	72	70	66	72	70	63	
	2.5	107	92	96	85	88	79	74	103	90	93	84	86	78	74	88	82	82	77	73	78	75	72	78	75	69	
	3	110	95	101	88	93	83	78	106	93	98	87	91	82	78	92	85	86	81	77	82	79	76	82	79	73	
	4	115	98	107	93	101	89	85	111	96	104	92	98	88	84	97	89	93	86	82	88	84	81	88	84	78	
	5	118	100	112	96	106	92	89	113	98	108	95	103	91	88	101	92	97	89	86	92	87	85	92	87	82	
	7	122	102	117	99	112	96	94	117	101	113	98	108	95	93	105	95	102	93	91	96	91	89	96	91	86	
10	124	104	121	102	117	100	98	120	103	116	100	113	99	97	108	98	106	96	95	100	94	93	100	94	90		

配光曲線

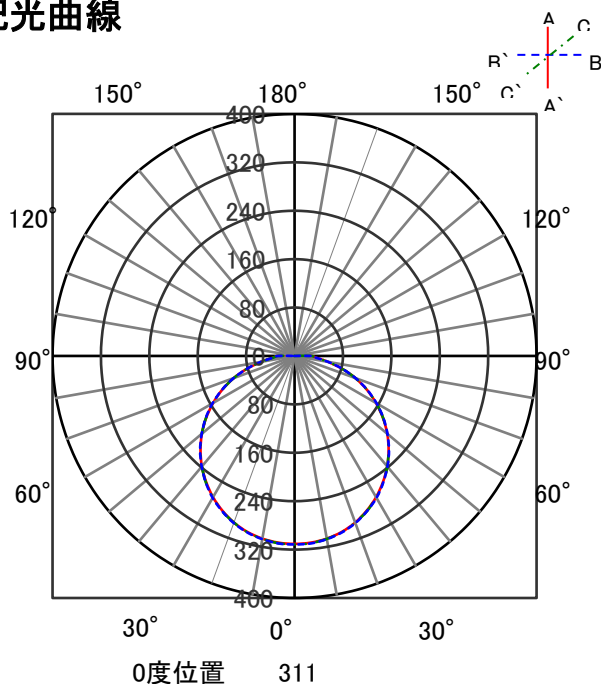


直射水平面照度

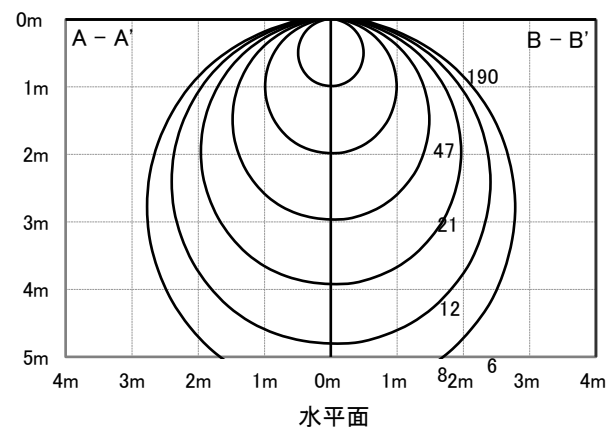

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSEYP30-GX53W			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF10N-H-GX53			否	0.63
器具光束	948 lm	最大取付間隔		器具効率	
光源	LED	AA	1.29H	上方向	1%
光源光束	1200 lm	BB	1.30H	下方向	99%
				全方向	100%

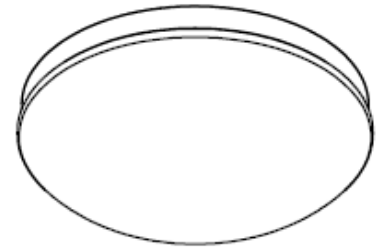


照明率表

作業面照明率(×0.01)																												
反射率 (%)	天井	80								70								50						30				0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0			
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0		
室 指 数	0.4	44	41	30	29	22	22	17	42	40	30	29	22	22	17	29	28	22	21	17	21	21	17	15				
	0.6	60	55	45	43	36	35	30	58	54	44	42	36	35	29	43	41	35	34	29	34	34	29	27				
	0.8	70	64	55	52	45	43	37	68	62	54	51	44	43	37	52	49	43	42	37	42	41	36	34				
	1	79	71	64	59	54	51	45	76	69	62	58	53	51	45	60	57	51	50	44	50	49	44	41				
	1.25	87	78	73	67	63	59	53	84	76	71	66	62	59	53	68	64	60	57	52	58	56	52	49				
	1.5	93	82	79	72	69	64	58	89	80	77	71	68	64	58	73	69	65	62	57	63	61	56	54				
	2	100	87	89	79	79	72	67	97	86	86	78	77	72	66	81	76	74	70	65	71	69	64	62				
	2.5	106	91	95	84	87	78	73	102	90	93	83	85	77	73	87	81	81	76	71	77	74	70	68				
	3	110	94	100	88	92	82	77	105	92	97	86	90	81	77	91	84	85	80	76	81	78	74	72				
	4	114	97	107	92	100	88	84	110	96	103	91	97	87	83	97	88	92	85	81	87	83	80	77				
	5	117	99	111	95	105	91	88	113	98	107	94	102	90	87	100	91	96	88	85	91	86	84	81				
	7	121	102	116	99	111	96	93	116	100	112	97	108	94	92	104	95	101	92	90	95	90	88	85				
10	124	104	120	101	116	99	97	119	102	116	100	113	98	96	108	97	105	96	94	99	94	92	89					

配光曲線

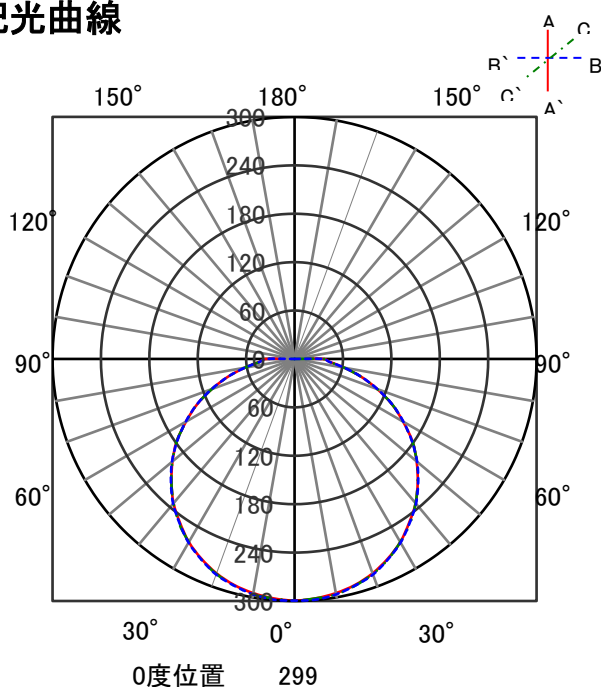


直射水平面照度

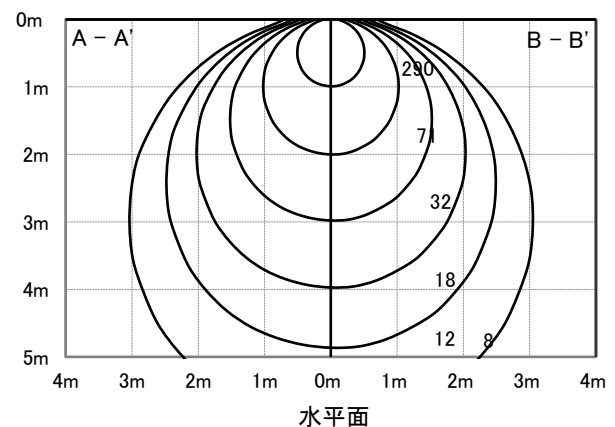

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSEYP30-GX53W			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF10WW-H-GX53			否	0.63
器具光束	948 lm	最大取付間隔		器具効率	
光源	LED	AA	1.29H	上方向	1%
光源光束	1200 lm	BB	1.30H	下方向	99%
				全方向	100%

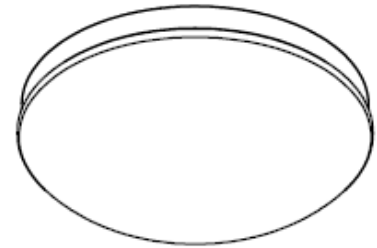


照明率表

作業面照明率(×0.01)																																
反射率 (%)	天井	80								70								50						30				0				
	壁	70			50			30		10	70			50			30			10	50			30			10	30			10	0
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	10	30	10	10	0		
室 指 数	0.4	44	41	30	29	22	22	17	42	40	30	29	22	22	17	29	28	22	21	17	21	21	17	15	15	15	15	15	15	15		
	0.6	60	55	45	43	36	35	30	58	54	44	42	36	35	29	43	41	35	34	29	34	34	29	27	27	27	27	27	27	27		
	0.8	70	64	55	52	45	43	37	68	62	54	51	44	43	37	52	49	43	42	37	42	41	36	34	34	34	34	34	34	34		
	1	79	71	64	59	54	51	45	76	69	62	58	53	51	45	60	57	51	50	44	50	49	44	41	41	41	41	41	41	41		
	1.25	87	78	73	67	63	59	53	84	76	71	66	62	59	53	68	64	60	57	52	58	56	52	49	49	49	49	49	49	49		
	1.5	93	82	79	72	69	64	58	89	80	77	71	68	64	58	73	69	65	62	57	63	61	56	54	54	54	54	54	54	54		
	2	100	87	89	79	72	67	67	97	86	86	78	77	72	66	81	76	74	70	65	71	69	64	62	62	62	62	62	62	62		
	2.5	106	91	95	84	87	78	73	102	90	93	83	85	77	73	87	81	81	76	71	77	74	70	68	68	68	68	68	68	68		
	3	110	94	100	88	92	82	77	105	92	97	86	90	81	77	91	84	85	80	76	81	78	74	72	72	72	72	72	72	72	72	
	4	114	97	107	92	100	88	84	110	96	103	91	97	87	83	97	88	92	85	81	87	83	80	77	77	77	77	77	77	77	77	
	5	117	99	111	95	105	91	88	113	98	107	94	102	90	87	100	91	96	88	85	91	86	84	81	81	81	81	81	81	81	81	
7	121	102	116	99	111	96	93	116	100	112	97	108	94	92	104	95	101	92	90	95	90	88	85	85	85	85	85	85	85	85		
10	124	104	120	101	116	99	97	119	102	116	100	113	98	96	108	97	105	96	94	99	94	92	89	89	89	89	89	89	89	89		

配光曲線

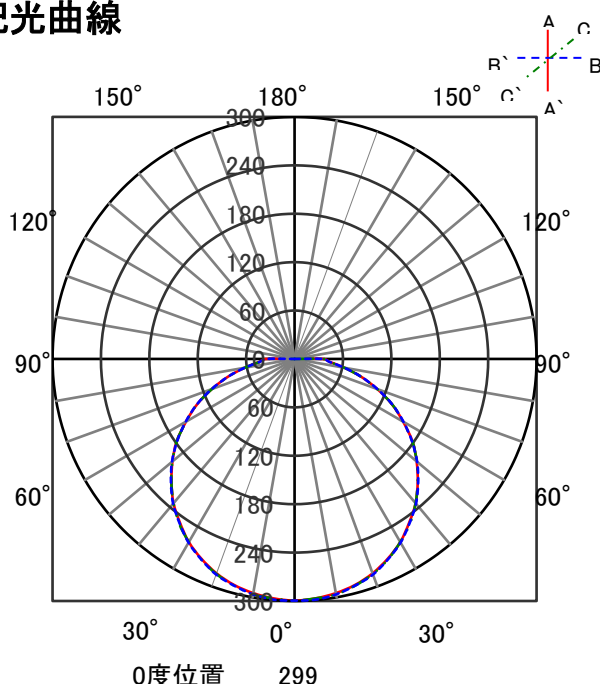


直射水平面照度

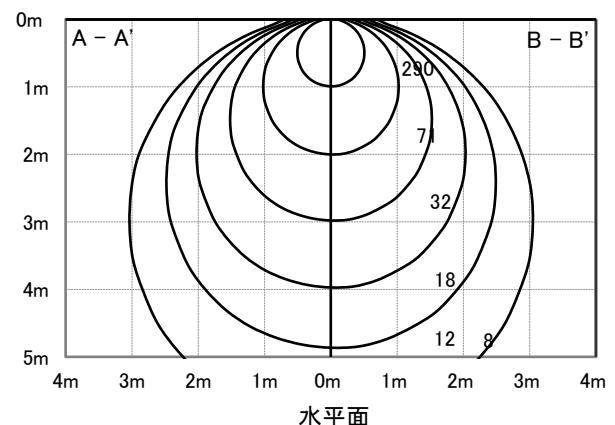

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSEYP30-GX53W			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF10L-H-GX53			否	0.63
器具光束	948 lm	最大取付間隔		器具効率	
光源	LED	AA	1.29H	上方向	1%
光源光束	1200 lm	BB	1.30H	下方向	99%
				全方向	100%

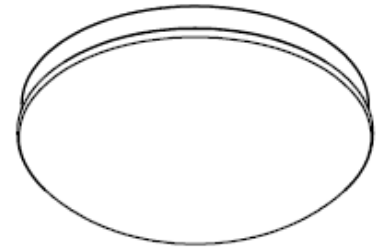

照明率表

作業面照明率(×0.01)																											
反射率(%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	44	41	30	29	22	22	17	42	40	30	29	22	22	17	29	28	22	21	17	21	21	17	15	15	15	
	0.6	60	55	45	43	36	35	30	58	54	44	42	36	35	29	43	41	35	34	29	34	34	29	27	27	27	
	0.8	70	64	55	52	45	43	37	68	62	54	51	44	43	37	52	49	43	42	37	42	41	36	34	34		
	1	79	71	64	59	54	51	45	76	69	62	58	53	51	45	60	57	51	50	44	50	49	44	41	41		
	1.25	87	78	73	67	63	59	53	84	76	71	66	62	59	53	68	64	60	57	52	58	56	52	49	49		
	1.5	93	82	79	72	69	64	58	89	80	77	71	68	64	58	73	69	65	62	57	63	61	56	54	54		
	2	100	87	89	79	79	72	67	97	86	86	78	77	72	66	81	76	74	70	65	71	69	64	62	62		
	2.5	106	91	95	84	87	78	73	102	90	93	83	85	77	73	87	81	81	76	71	77	74	70	68	68		
	3	110	94	100	88	92	82	77	105	92	97	86	90	81	77	91	84	85	80	76	81	78	74	72	72		
	4	114	97	107	92	100	88	84	110	96	103	91	97	87	83	97	88	92	85	81	87	83	80	77	77		
	5	117	99	111	95	105	91	88	113	98	107	94	102	90	87	100	91	96	88	85	91	86	84	81	81		
	7	121	102	116	99	111	96	93	116	100	112	97	108	94	92	104	95	101	92	90	95	90	88	85	85		
10	124	104	120	101	116	99	97	119	102	116	100	113	98	96	108	97	105	96	94	99	94	92	89	89			

配光曲線

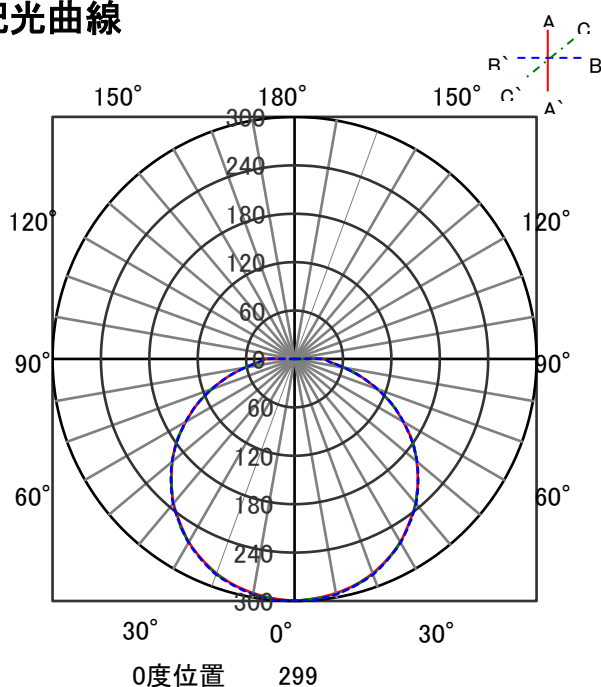

直射水平面照度

