


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSETP30-GX53B			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5N-H-GX53-HE140			否	0.63
器具光束	683 lm	最大取付間隔		器具効率	
光源	LED	AA	1.26H	上方向	1%
光源光束	750 lm	BB	1.27H	下方向	99%
				全方向	100%

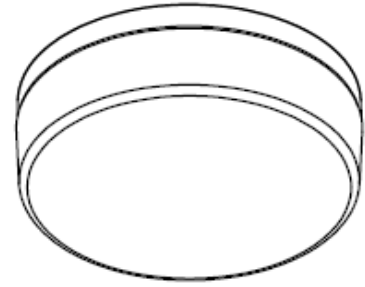


照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	45	42	31	30	23	23	18	43	41	30	29	23	23	18	29	29	23	22	18	22	22	18	16			
	0.6	61	56	47	44	38	36	31	59	55	46	44	37	36	31	44	42	36	36	31	36	35	31	29			
	0.8	72	65	56	53	47	45	39	69	63	55	52	46	44	39	53	51	45	44	38	44	43	38	36			
	1	80	72	65	61	55	53	46	77	70	64	60	55	52	46	61	58	53	51	46	52	50	46	43			
	1.25	89	79	75	68	65	61	55	85	77	73	67	64	60	55	70	66	62	59	54	60	58	54	51			
	1.5	94	83	81	73	71	66	60	90	81	79	72	70	65	60	75	70	67	64	59	65	63	58	56			
	2	102	88	90	80	81	74	68	98	87	87	79	79	73	68	83	77	76	72	67	73	70	66	64			
	2.5	107	92	97	86	88	80	75	103	91	94	84	86	79	74	89	82	83	77	73	79	76	72	70			
	3	110	95	101	89	94	84	79	106	93	98	88	91	83	78	93	85	87	81	77	83	79	76	73			
	4	115	98	108	93	101	89	85	111	96	104	92	98	88	84	98	89	93	86	83	88	84	82	79			
	5	118	100	112	96	106	92	89	114	98	108	95	103	91	88	101	92	97	89	87	92	88	85	82			
	7	122	102	117	99	112	96	94	117	101	113	98	109	95	93	105	96	102	93	91	96	91	90	87			
10	124	104	121	102	117	100	98	120	103	116	101	113	99	97	109	98	106	96	95	100	94	93	90				

配光曲線

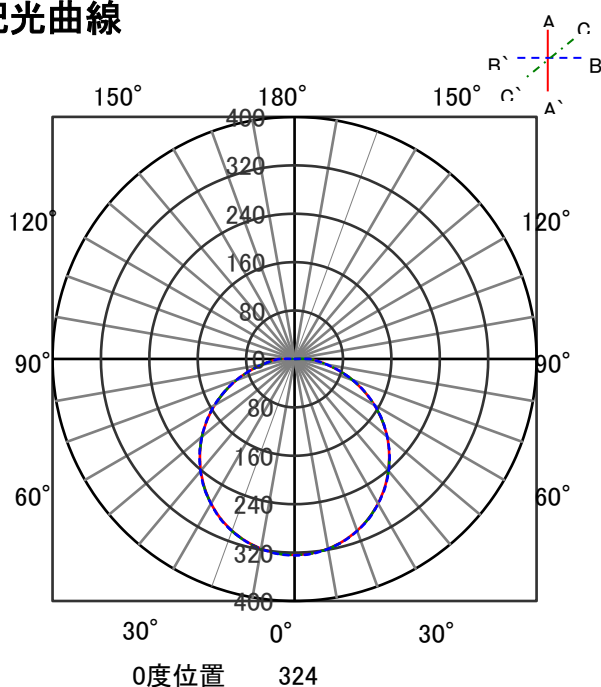


直射水平面照度

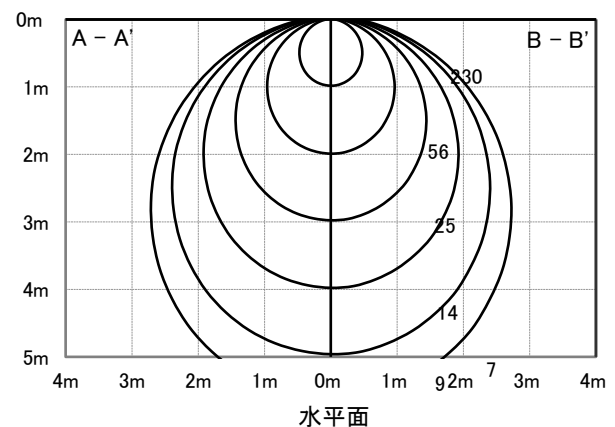

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSETP30-GX53B			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5WW-H-GX53-HE140			否	0.63
器具光束	683 lm	最大取付間隔		器具効率	
光源	LED	AA	1.26H	上方向	1%
光源光束	750 lm	BB	1.27H	下方向	99%
				全方向	100%

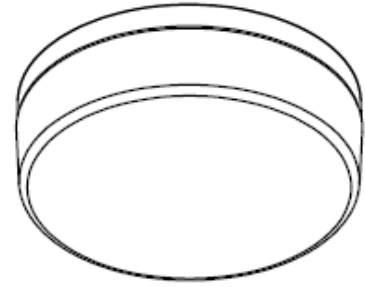


照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	45	42	31	30	23	23	18	43	41	30	29	23	23	18	29	29	23	22	18	22	22	18	16			
	0.6	61	56	47	44	38	36	31	59	55	46	44	37	36	31	44	42	36	36	31	36	35	31	29			
	0.8	72	65	56	53	47	45	39	69	63	55	52	46	44	39	53	51	45	44	38	44	43	38	36			
	1	80	72	65	61	55	53	46	77	70	64	60	55	52	46	61	58	53	51	46	52	50	46	43			
	1.25	89	79	75	68	65	61	55	85	77	73	67	64	60	55	70	66	62	59	54	60	58	54	51			
	1.5	94	83	81	73	71	66	60	90	81	79	72	70	65	60	75	70	67	64	59	65	63	58	56			
	2	102	88	90	80	81	74	68	98	87	87	79	79	73	68	83	77	76	72	67	73	70	66	64			
	2.5	107	92	97	86	88	80	75	103	91	94	84	86	79	74	89	82	83	77	73	79	76	72	70			
	3	110	95	101	89	94	84	79	106	93	98	88	91	83	78	93	85	87	81	77	83	79	76	73			
	4	115	98	108	93	101	89	85	111	96	104	92	98	88	84	98	89	93	86	83	88	84	82	79			
	5	118	100	112	96	106	92	89	114	98	108	95	103	91	88	101	92	97	89	87	92	88	85	82			
	7	122	102	117	99	112	96	94	117	101	113	98	109	95	93	105	96	102	93	91	96	91	90	87			
10	124	104	121	102	117	100	98	120	103	116	101	113	99	97	109	98	106	96	95	100	94	93	90				

配光曲線

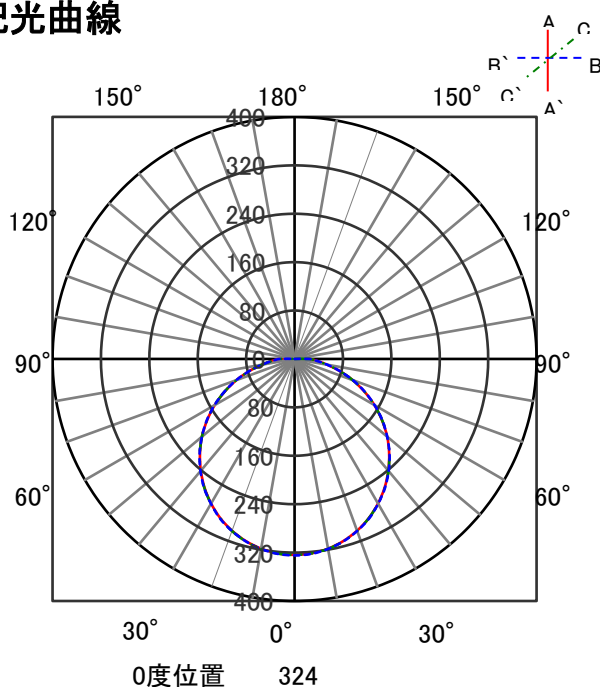


直射水平面照度

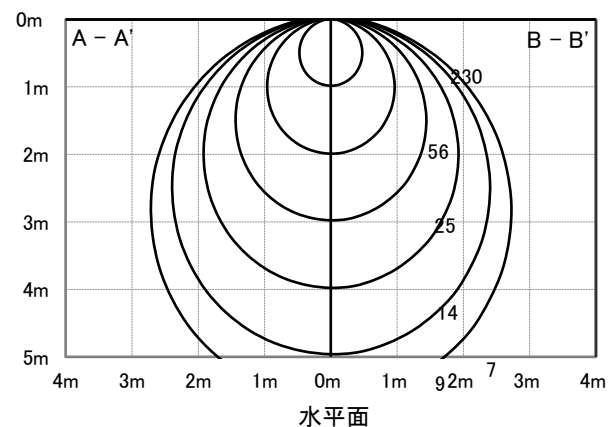

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSETP30-GX53B			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5L-H-GX53-HE140			否	0.63
器具光束	683 lm	最大取付間隔		器具効率	
光源	LED	AA	1.26H	上方向	1%
光源光束	750 lm	BB	1.27H	下方向	99%
				全方向	100%

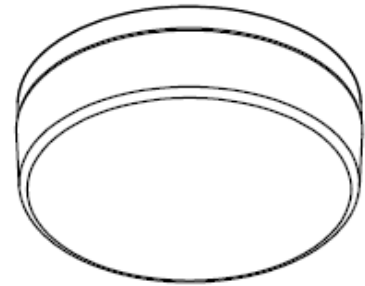


照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	45	42	31	30	23	23	18	43	41	30	29	23	23	18	29	29	23	22	18	22	22	18	16			
	0.6	61	56	47	44	38	36	31	59	55	46	44	37	36	31	44	42	36	36	31	36	35	31	29			
	0.8	72	65	56	53	47	45	39	69	63	55	52	46	44	39	53	51	45	44	38	44	43	38	36			
	1	80	72	65	61	55	53	46	77	70	64	60	55	52	46	61	58	53	51	46	52	50	46	43			
	1.25	89	79	75	68	65	61	55	85	77	73	67	64	60	55	70	66	62	59	54	60	58	54	51			
	1.5	94	83	81	73	71	66	60	90	81	79	72	70	65	60	75	70	67	64	59	65	63	58	56			
	2	102	88	90	80	81	74	68	98	87	87	79	79	73	68	83	77	76	72	67	73	70	66	64			
	2.5	107	92	97	86	88	80	75	103	91	94	84	86	79	74	89	82	83	77	73	79	76	72	70			
	3	110	95	101	89	94	84	79	106	93	98	88	91	83	78	93	85	87	81	77	83	79	76	73			
	4	115	98	108	93	101	89	85	111	96	104	92	98	88	84	98	89	93	86	83	88	84	82	79			
	5	118	100	112	96	106	92	89	114	98	108	95	103	91	88	101	92	97	89	87	92	88	85	82			
	7	122	102	117	99	112	96	94	117	101	113	98	109	95	93	105	96	102	93	91	96	91	90	87			
10	124	104	121	102	117	100	98	120	103	116	101	113	99	97	109	98	106	96	95	100	94	93	90				

配光曲線

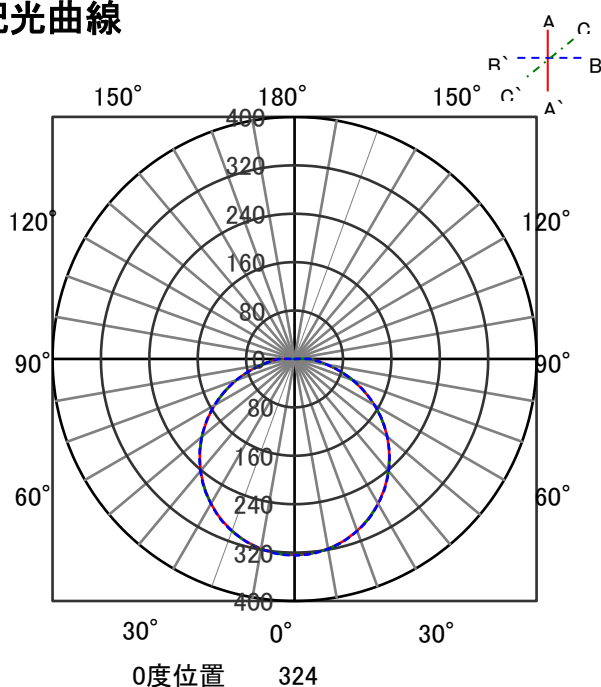


直射水平面照度

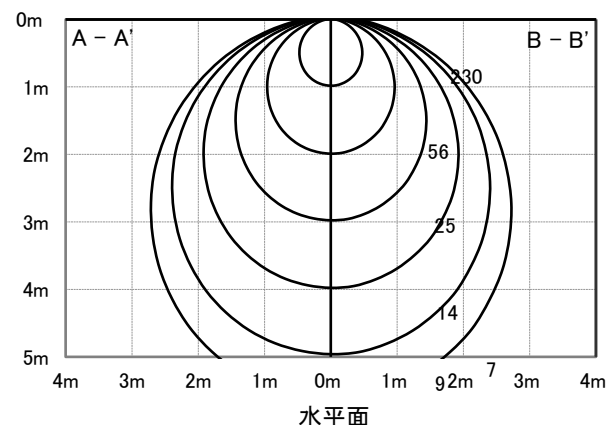

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSETP30-GX53B			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF7N-H-GX53			否	0.63
器具光束	683 lm	最大取付間隔		器具効率	
光源	LED	AA	1.26H	上方向	1%
光源光束	750 lm	BB	1.27H	下方向	99%
				全方向	100%

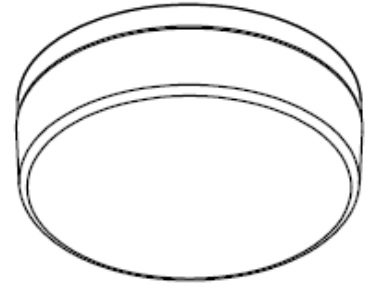


照明率表

作業面照明率(×0.01)																											
反射率(%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0			
室指数	0.4	45	42	31	30	23	23	18	43	41	30	29	23	23	18	29	29	23	22	18	22	22	18	16			
	0.6	61	56	47	44	38	36	31	59	55	46	44	37	36	31	44	42	36	36	31	36	35	31	29			
	0.8	72	65	56	53	47	45	39	69	63	55	52	46	44	39	53	51	45	44	38	44	43	38	36			
	1	80	72	65	61	55	53	46	77	70	64	60	55	52	46	61	58	53	51	46	52	50	46	43			
	1.25	89	79	75	68	65	61	55	85	77	73	67	64	60	55	70	66	62	59	54	60	58	54	51			
	1.5	94	83	81	73	71	66	60	90	81	79	72	70	65	60	75	70	67	64	59	65	63	58	56			
	2	102	88	90	80	81	74	68	98	87	87	79	79	73	68	83	77	76	72	67	73	70	66	64			
	2.5	107	92	97	86	88	80	75	103	91	94	84	86	79	74	89	82	83	77	73	79	76	72	70			
	3	110	95	101	89	94	84	79	106	93	98	88	91	83	78	93	85	87	81	77	83	79	76	73			
	4	115	98	108	93	101	89	85	111	96	104	92	98	88	84	98	89	93	86	83	88	84	82	79			
	5	118	100	112	96	106	92	89	114	98	108	95	103	91	88	101	92	97	89	87	92	88	85	82			
	7	122	102	117	99	112	96	94	117	101	113	98	109	95	93	105	96	102	93	91	96	91	90	87			
10	124	104	121	102	117	100	98	120	103	116	101	113	99	97	109	98	106	96	95	100	94	93	90				

配光曲線

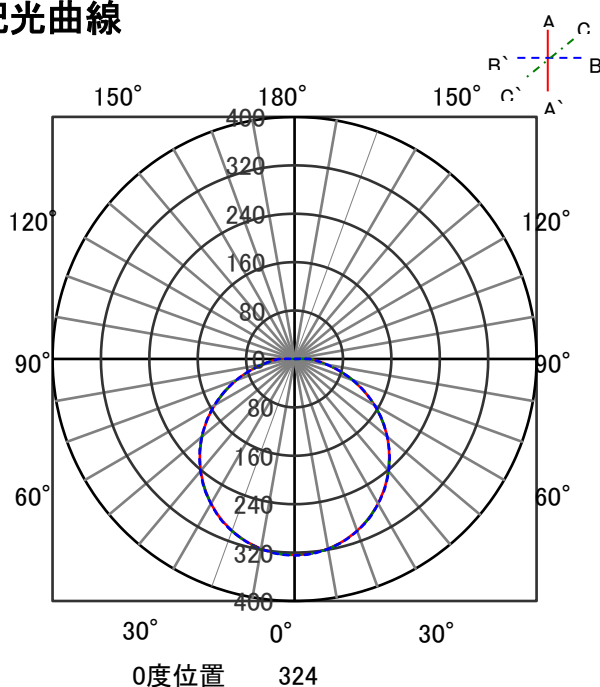


直射水平面照度

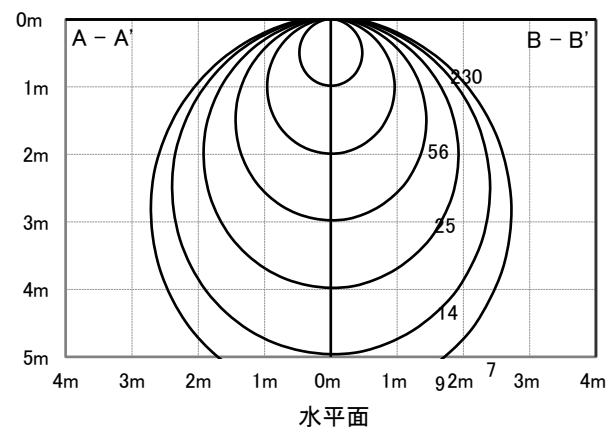

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSETP30-GX53B			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF7WW-H-GX53			否	0.63
器具光束	683 lm	最大取付間隔		器具効率	
光源	LED	AA	1.26H	上方向	1%
光源光束	750 lm	BB	1.27H	下方向	99%
				全方向	100%

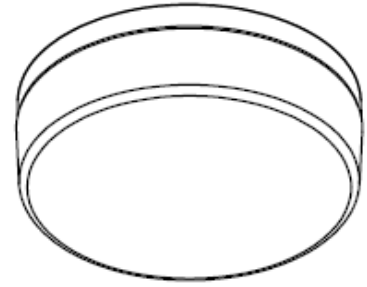


照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	45	42	31	30	23	23	18	43	41	30	29	23	23	18	29	29	23	22	18	22	22	18	16			
	0.6	61	56	47	44	38	36	31	59	55	46	44	37	36	31	44	42	36	36	31	36	35	31	29			
	0.8	72	65	56	53	47	45	39	69	63	55	52	46	44	39	53	51	45	44	38	44	43	38	36			
	1	80	72	65	61	55	53	46	77	70	64	60	55	52	46	61	58	53	51	46	52	50	46	43			
	1.25	89	79	75	68	65	61	55	85	77	73	67	64	60	55	70	66	62	59	54	60	58	54	51			
	1.5	94	83	81	73	71	66	60	90	81	79	72	70	65	60	75	70	67	64	59	65	63	58	56			
	2	102	88	90	80	81	74	68	98	87	87	79	79	73	68	83	77	76	72	67	73	70	66	64			
	2.5	107	92	97	86	88	80	75	103	91	94	84	86	79	74	89	82	83	77	73	79	76	72	70			
	3	110	95	101	89	94	84	79	106	93	98	88	91	83	78	93	85	87	81	77	83	79	76	73			
	4	115	98	108	93	101	89	85	111	96	104	92	98	88	84	98	89	93	86	83	88	84	82	79			
	5	118	100	112	96	106	92	89	114	98	108	95	103	91	88	101	92	97	89	87	92	88	85	82			
	7	122	102	117	99	112	96	94	117	101	113	98	109	95	93	105	96	102	93	91	96	91	90	87			
10	124	104	121	102	117	100	98	120	103	116	101	113	99	97	109	98	106	96	95	100	94	93	90				

配光曲線

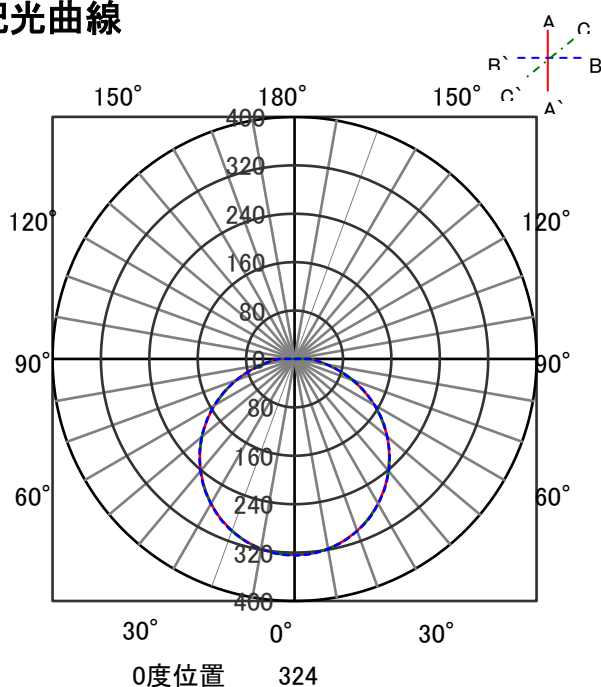


直射水平面照度

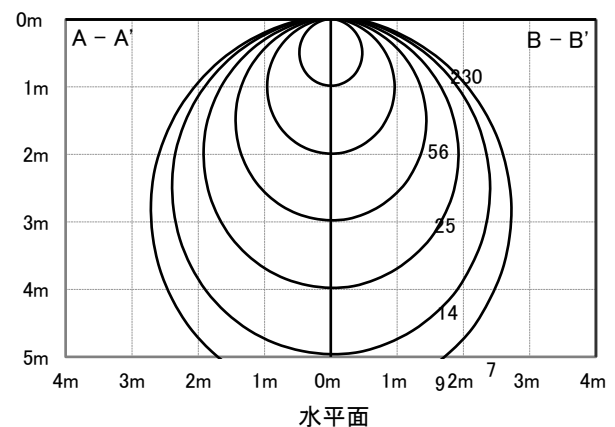

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSETP30-GX53B			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF7L-H-GX53			否	0.63
器具光束	683 lm	最大取付間隔		器具効率	
光源	LED	AA	1.26H	上方向	1%
光源光束	750 lm	BB	1.27H	下方向	99%
				全方向	100%

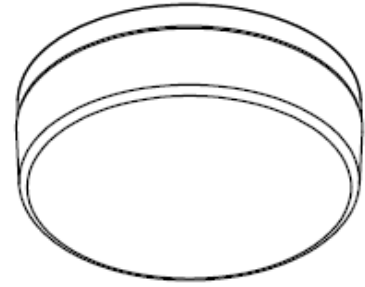


照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	45	42	31	30	23	23	18	43	41	30	29	23	23	18	29	29	23	22	18	22	22	18	16			
	0.6	61	56	47	44	38	36	31	59	55	46	44	37	36	31	44	42	36	36	31	36	35	31	29			
	0.8	72	65	56	53	47	45	39	69	63	55	52	46	44	39	53	51	45	44	38	44	43	38	36			
	1	80	72	65	61	55	53	46	77	70	64	60	55	52	46	61	58	53	51	46	52	50	46	43			
	1.25	89	79	75	68	65	61	55	85	77	73	67	64	60	55	70	66	62	59	54	60	58	54	51			
	1.5	94	83	81	73	71	66	60	90	81	79	72	70	65	60	75	70	67	64	59	65	63	58	56			
	2	102	88	90	80	81	74	68	98	87	87	79	79	73	68	83	77	76	72	67	73	70	66	64			
	2.5	107	92	97	86	88	80	75	103	91	94	84	86	79	74	89	82	83	77	73	79	76	72	70			
	3	110	95	101	89	94	84	79	106	93	98	88	91	83	78	93	85	87	81	77	83	79	76	73			
	4	115	98	108	93	101	89	85	111	96	104	92	98	88	84	98	89	93	86	83	88	84	82	79			
	5	118	100	112	96	106	92	89	114	98	108	95	103	91	88	101	92	97	89	87	92	88	85	82			
	7	122	102	117	99	112	96	94	117	101	113	98	109	95	93	105	96	102	93	91	96	91	90	87			
10	124	104	121	102	117	100	98	120	103	116	101	113	99	97	109	98	106	96	95	100	94	93	90				

配光曲線

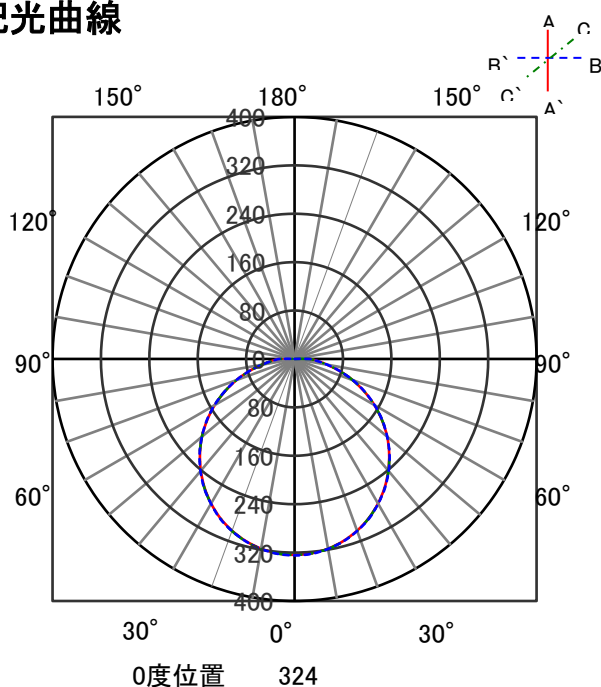


直射水平面照度

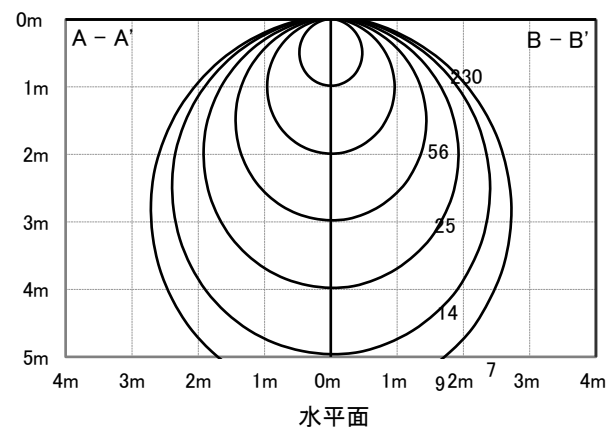

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSETP30-GX53B			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF7N-H-GX53-D			否	0.63
器具光束	683 lm	最大取付間隔		器具効率	
光源	LED	AA	1.26H	上方向	1%
光源光束	750 lm	BB	1.27H	下方向	99%
				全方向	100%

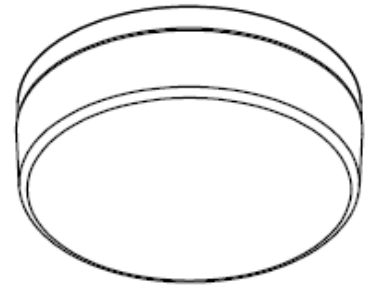


照明率表

作業面照明率(×0.01)																											
反射率(%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室指数	0.4	45	42	31	30	23	23	18	43	41	30	29	23	23	18	29	29	23	22	18	22	22	18	16			
	0.6	61	56	47	44	38	36	31	59	55	46	44	37	36	31	44	42	36	36	31	36	35	31	29			
	0.8	72	65	56	53	47	45	39	69	63	55	52	46	44	39	53	51	45	44	38	44	43	38	36			
	1	80	72	65	61	55	53	46	77	70	64	60	55	52	46	61	58	53	51	46	52	50	46	43			
	1.25	89	79	75	68	65	61	55	85	77	73	67	64	60	55	70	66	62	59	54	60	58	54	51			
	1.5	94	83	81	73	71	66	60	90	81	79	72	70	65	60	75	70	67	64	59	65	63	58	56			
	2	102	88	90	80	81	74	68	98	87	87	79	79	73	68	83	77	76	72	67	73	70	66	64			
	2.5	107	92	97	86	88	80	75	103	91	94	84	86	79	74	89	82	83	77	73	79	76	72	70			
	3	110	95	101	89	94	84	79	106	93	98	88	91	83	78	93	85	87	81	77	83	79	76	73			
	4	115	98	108	93	101	89	85	111	96	104	92	98	88	84	98	89	93	86	83	88	84	82	79			
	5	118	100	112	96	106	92	89	114	98	108	95	103	91	88	101	92	97	89	87	92	88	85	82			
	7	122	102	117	99	112	96	94	117	101	113	98	109	95	93	105	96	102	93	91	96	91	90	87			
10	124	104	121	102	117	100	98	120	103	116	101	113	99	97	109	98	106	96	95	100	94	93	90				

配光曲線

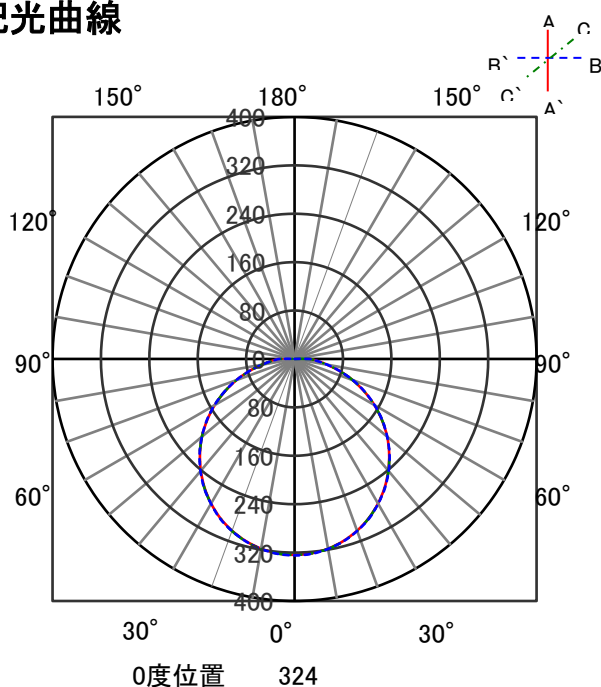


直射水平面照度

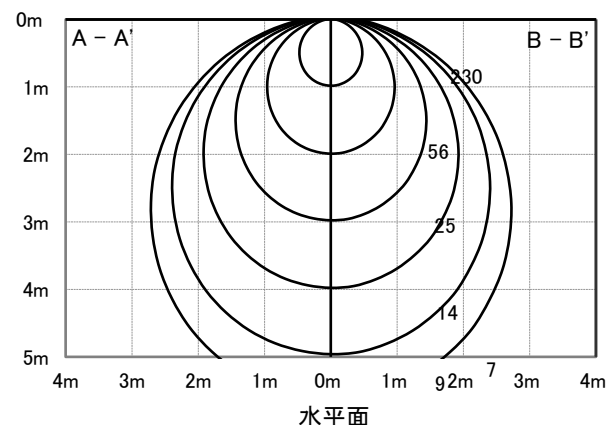

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSETP30-GX53B			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF7WW-H-GX53-D			否	0.63
器具光束	683 lm	最大取付間隔		器具効率	
光源	LED	AA	1.26H	上方向	1%
光源光束	750 lm	BB	1.27H	下方向	99%
				全方向	100%

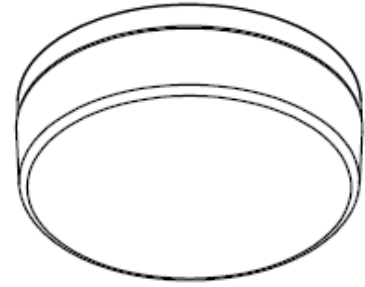


照明率表

作業面照明率(×0.01)																											
反射率(%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室指数	0.4	45	42	31	30	23	23	18	43	41	30	29	23	23	18	29	29	23	22	18	22	22	18	16			
	0.6	61	56	47	44	38	36	31	59	55	46	44	37	36	31	44	42	36	36	31	36	35	31	29			
	0.8	72	65	56	53	47	45	39	69	63	55	52	46	44	39	53	51	45	44	38	44	43	38	36			
	1	80	72	65	61	55	53	46	77	70	64	60	55	52	46	61	58	53	51	46	52	50	46	43			
	1.25	89	79	75	68	65	61	55	85	77	73	67	64	60	55	70	66	62	59	54	60	58	54	51			
	1.5	94	83	81	73	71	66	60	90	81	79	72	70	65	60	75	70	67	64	59	65	63	58	56			
	2	102	88	90	80	81	74	68	98	87	87	79	79	73	68	83	77	76	72	67	73	70	66	64			
	2.5	107	92	97	86	88	80	75	103	91	94	84	86	79	74	89	82	83	77	73	79	76	72	70			
	3	110	95	101	89	94	84	79	106	93	98	88	91	83	78	93	85	87	81	77	83	79	76	73			
	4	115	98	108	93	101	89	85	111	96	104	92	98	88	84	98	89	93	86	83	88	84	82	79			
	5	118	100	112	96	106	92	89	114	98	108	95	103	91	88	101	92	97	89	87	92	88	85	82			
	7	122	102	117	99	112	96	94	117	101	113	98	109	95	93	105	96	102	93	91	96	91	90	87			
10	124	104	121	102	117	100	98	120	103	116	101	113	99	97	109	98	106	96	95	100	94	93	90				

配光曲線

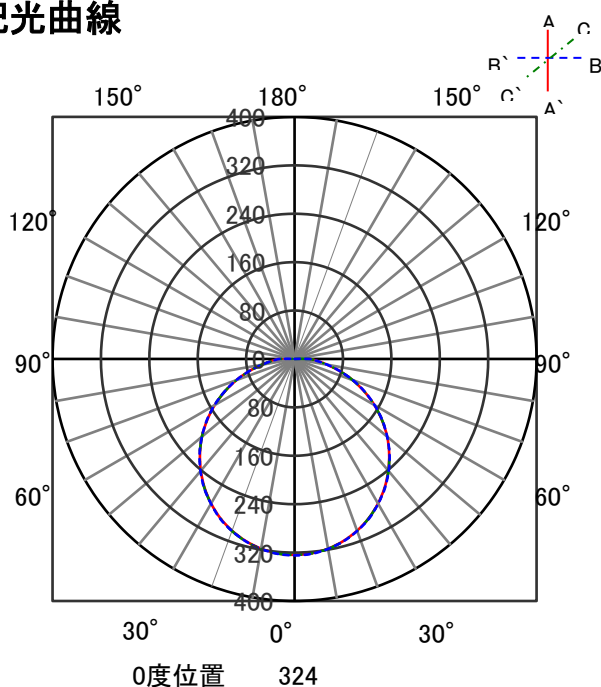


直射水平面照度

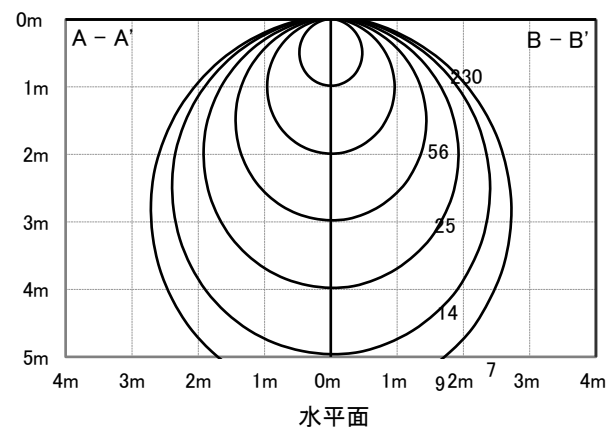

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSETP30-GX53B			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF7L-H-GX53-D			否	0.63
器具光束	683 lm	最大取付間隔		器具効率	
光源	LED	AA	1.26H	上方向	1%
光源光束	750 lm	BB	1.27H	下方向	99%
				全方向	100%

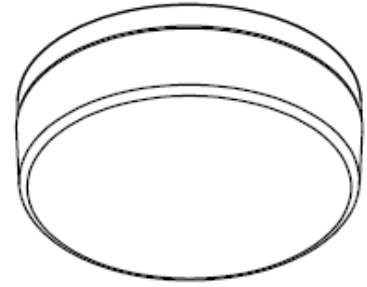


照明率表

作業面照明率(×0.01)																											
反射率(%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室指数	0.4	45	42	31	30	23	23	18	43	41	30	29	23	23	18	29	29	23	22	18	22	22	18	16			
	0.6	61	56	47	44	38	36	31	59	55	46	44	37	36	31	44	42	36	36	31	36	35	31	29			
	0.8	72	65	56	53	47	45	39	69	63	55	52	46	44	39	53	51	45	44	38	44	43	38	36			
	1	80	72	65	61	55	53	46	77	70	64	60	55	52	46	61	58	53	51	46	52	50	46	43			
	1.25	89	79	75	68	65	61	55	85	77	73	67	64	60	55	70	66	62	59	54	60	58	54	51			
	1.5	94	83	81	73	71	66	60	90	81	79	72	70	65	60	75	70	67	64	59	65	63	58	56			
	2	102	88	90	80	81	74	68	98	87	87	79	79	73	68	83	77	76	72	67	73	70	66	64			
	2.5	107	92	97	86	88	80	75	103	91	94	84	86	79	74	89	82	83	77	73	79	76	72	70			
	3	110	95	101	89	94	84	79	106	93	98	88	91	83	78	93	85	87	81	77	83	79	76	73			
	4	115	98	108	93	101	89	85	111	96	104	92	98	88	84	98	89	93	86	83	88	84	82	79			
	5	118	100	112	96	106	92	89	114	98	108	95	103	91	88	101	92	97	89	87	92	88	85	82			
	7	122	102	117	99	112	96	94	117	101	113	98	109	95	93	105	96	102	93	91	96	91	90	87			
10	124	104	121	102	117	100	98	120	103	116	101	113	99	97	109	98	106	96	95	100	94	93	90				

配光曲線

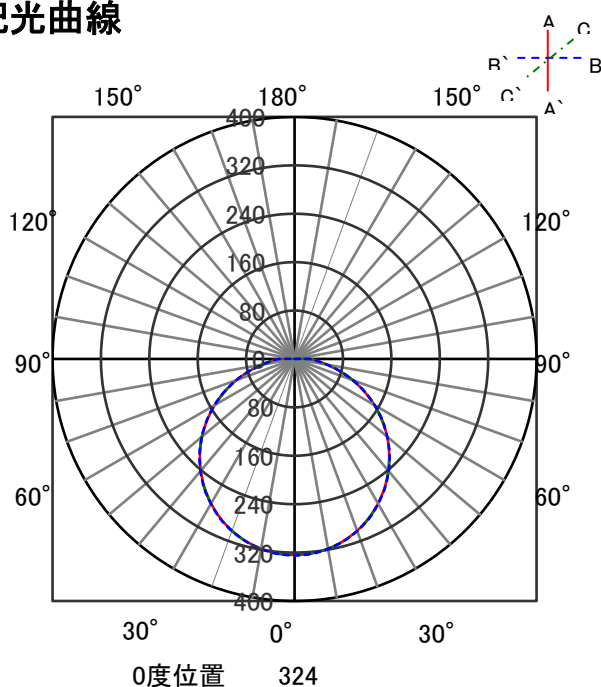


直射水平面照度

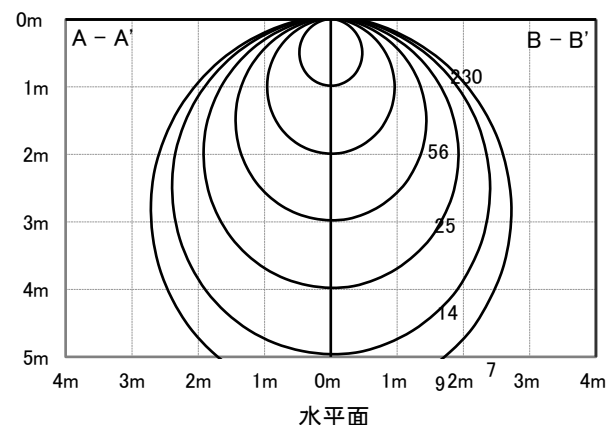

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
				良	0.69
器具品番	NSETP30-GX53B			中	0.67
光源品名	GX53口金LEDランプ			否	0.63
光源品番	LDF10N-H-GX53			器具効率	
器具光束	1092 lm	最大取付間隔		上方向	1%
光源	LED	AA	1.27	下方向	99%
光源光束	1200 lm	BB	1.27	全方向	100%

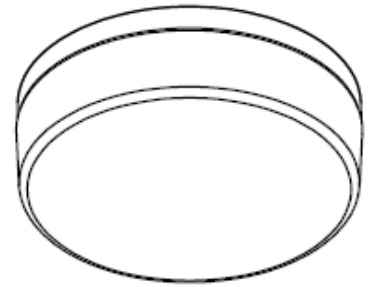


照明率表

作業面照明率(×0.01)																												
反射率(%)	天井	80								70								50						30				0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0			
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0		
室指数	0.4	44	42	31	29	23	23	18	43	41	30	29	23	22	18	29	28	22	22	18	22	22	18	22	22	18	16	
	0.6	61	56	46	44	37	36	30	59	55	45	43	37	36	30	44	42	36	35	30	35	35	30	35	35	30	28	
	0.8	71	65	56	52	46	44	38	69	63	55	52	45	44	38	52	50	44	43	38	43	43	42	37	35	35		
	1	80	72	65	60	55	52	46	77	70	63	59	54	51	45	61	57	52	50	45	51	50	45	42	37	35		
	1.25	88	78	74	68	64	60	54	85	76	72	67	63	59	54	69	65	61	58	53	59	57	53	50	45	42		
	1.5	93	82	80	73	70	65	59	90	80	78	71	69	64	59	74	69	66	63	58	64	62	57	55	50	45		
	2	101	88	89	80	80	73	67	97	86	87	79	78	72	67	82	76	75	71	66	72	69	65	63	57	55		
	2.5	106	92	96	85	88	79	74	102	90	93	84	86	78	73	88	81	82	77	72	78	75	71	68	63	57		
	3	110	94	101	88	93	83	78	106	93	97	87	90	82	77	92	84	86	80	76	82	79	75	72	67	63		
	4	115	98	107	93	100	88	84	110	96	103	91	97	87	83	97	89	92	85	82	88	83	81	78	72	67		
	5	118	100	111	95	105	92	88	113	98	107	94	102	91	87	101	92	96	89	86	91	87	84	81	76	72		
	7	121	102	116	99	112	96	93	117	100	112	98	108	95	92	105	95	101	93	90	96	91	89	86	81	76		
10	124	104	120	101	117	99	97	119	102	116	100	113	98	96	108	98	106	96	94	99	94	92	89	86	81			

配光曲線

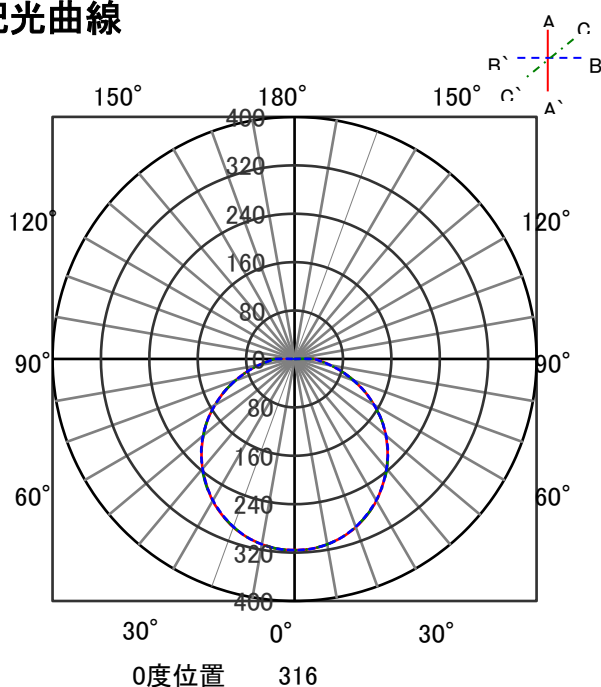


直射水平面照度

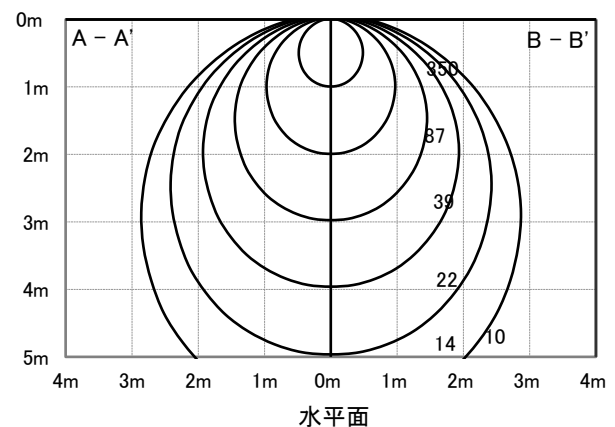

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSETP30-GX53B			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF10WW-H-GX53			否	0.63
				器具効率	
器具光束	1092 lm	最大取付間隔		上方向	1%
光源	LED	AA	1.27	下方向	99%
光源光束	1200 lm	BB	1.27	全方向	100%

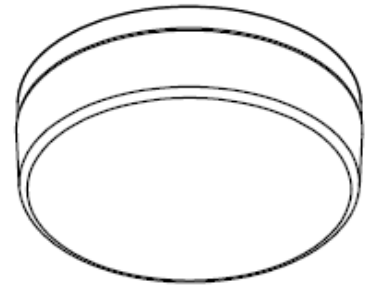


照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	44	42	31	29	23	23	18	43	41	30	29	23	22	18	29	28	22	22	18	22	22	18	22	22	18	16
	0.6	61	56	46	44	37	36	30	59	55	45	43	37	36	30	44	42	36	35	30	35	35	30	35	35	30	28
	0.8	71	65	56	52	46	44	38	69	63	55	52	45	44	38	52	50	44	43	38	43	42	37	35	35	30	28
	1	80	72	65	60	55	52	46	77	70	63	59	54	51	45	61	57	52	50	45	51	50	45	42	37	35	28
	1.25	88	78	74	68	64	60	54	85	76	72	67	63	59	54	69	65	61	58	53	59	57	53	50	45	42	37
	1.5	93	82	80	73	70	65	59	90	80	78	71	69	64	59	74	69	66	63	58	64	62	57	55	50	45	42
	2	101	88	89	80	80	73	67	97	86	87	79	78	72	67	82	76	75	71	66	72	69	65	63	58	55	50
	2.5	106	92	96	85	88	79	74	102	90	93	84	86	78	73	88	81	82	77	72	78	75	71	68	63	58	55
	3	110	94	101	88	93	83	78	106	93	97	87	90	82	77	92	84	86	80	76	82	79	75	72	67	63	58
	4	115	98	107	93	100	88	84	110	96	103	91	97	87	83	97	89	92	85	82	88	83	81	78	72	67	63
	5	118	100	111	95	105	92	88	113	98	107	94	102	91	87	101	92	96	89	86	91	87	84	81	76	72	67
	7	121	102	116	99	112	96	93	117	100	112	98	108	95	92	105	95	101	93	90	96	91	89	86	81	76	72
10	124	104	120	101	117	99	97	119	102	116	100	113	98	96	108	98	106	96	94	99	94	92	89	86	81	76	

配光曲線

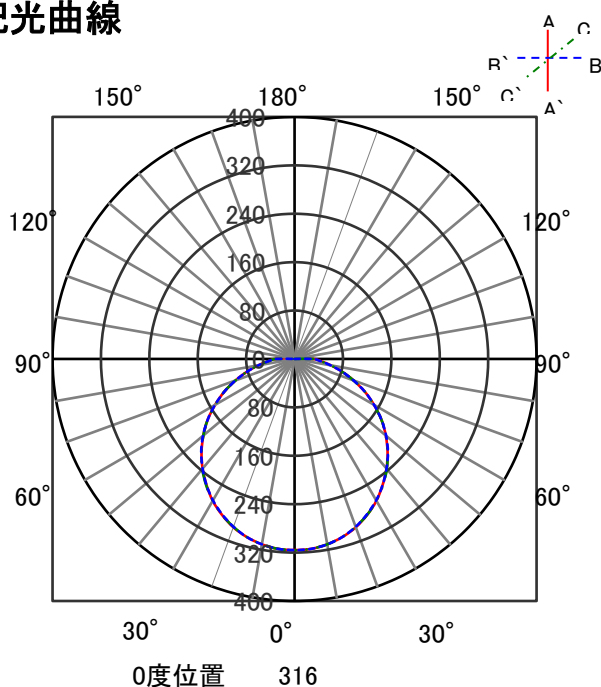


直射水平面照度

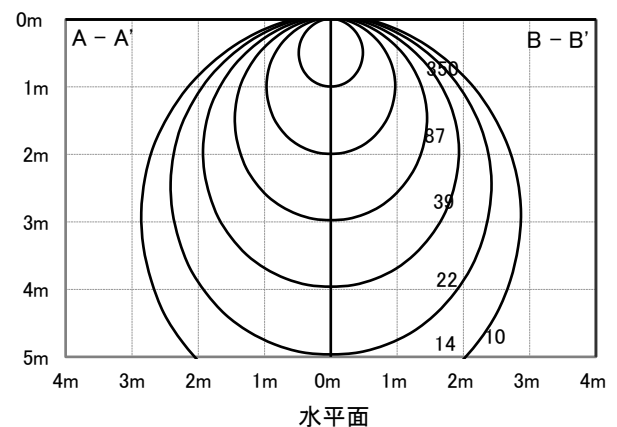

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSETP30-GX53B			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF10L-H-GX53			否	0.63
器具光束	1092 lm	最大取付間隔		器具効率	
光源	LED	AA	1.27	上方向	1%
光源光束	1200 lm	BB	1.27	下方向	99%
				全方向	100%

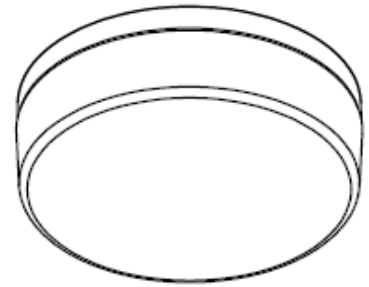

照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	44	42	31	29	23	23	18	43	41	30	29	23	22	18	29	28	22	22	18	22	22	18	22	22	18	16
	0.6	61	56	46	44	37	36	30	59	55	45	43	37	36	30	44	42	36	35	30	35	35	30	35	35	30	28
	0.8	71	65	56	52	46	44	38	69	63	55	52	45	44	38	52	50	44	43	38	43	42	37	42	37	35	
	1	80	72	65	60	55	52	46	77	70	63	59	54	51	45	61	57	52	50	45	51	50	45	45	45	42	
	1.25	88	78	74	68	64	60	54	85	76	72	67	63	59	54	69	65	61	58	53	59	57	53	50			
	1.5	93	82	80	73	70	65	59	90	80	78	71	69	64	59	74	69	66	63	58	64	62	57	55			
	2	101	88	89	80	80	73	67	97	86	87	79	78	72	67	82	76	75	71	66	72	69	65	63			
	2.5	106	92	96	85	88	79	74	102	90	93	84	86	78	73	88	81	82	77	72	78	75	71	68			
	3	110	94	101	88	93	83	78	106	93	97	87	90	82	77	92	84	86	80	76	82	79	75	72			
	4	115	98	107	93	100	88	84	110	96	103	91	97	87	83	97	89	92	85	82	88	83	81	78			
	5	118	100	111	95	105	92	88	113	98	107	94	102	91	87	101	92	96	89	86	91	87	84	81			
	7	121	102	116	99	112	96	93	117	100	112	98	108	95	92	105	95	101	93	90	96	91	89	86			
10	124	104	120	101	117	99	97	119	102	116	100	113	98	96	108	98	106	96	94	99	94	92	89				

配光曲線

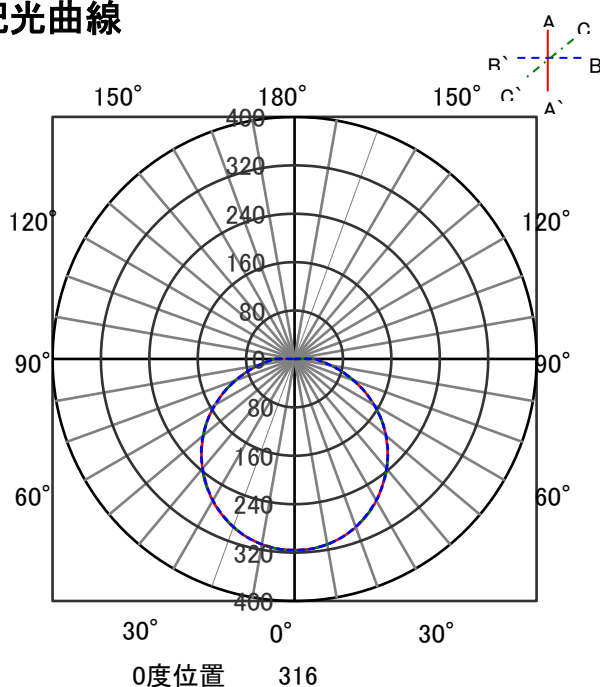

直射水平面照度

