


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSEYP25U-GX53B			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5N-H-GX53-HE140			否	0.63
器具光束	574 lm	最大取付間隔		器具効率	
光源	LED	AA	1.29H	上方向	1%
光源光束	750 lm	BB	1.29H	下方向	99%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	44	41	30	29	23	22	18	43	40	30	29	23	22	18	29	28	22	22	18	22	22	18	22	22	18	16
	0.6	61	56	46	44	37	36	30	59	55	45	43	37	36	30	44	42	36	35	30	35	35	30	35	35	30	28
	0.8	71	65	56	52	46	44	38	69	63	55	52	45	44	38	52	50	44	43	38	43	42	37	35	35	30	28
	1	80	72	65	60	55	52	46	77	70	63	59	54	52	46	61	58	52	51	45	51	50	45	42	42	37	35
	1.25	88	78	74	68	64	60	54	85	77	72	67	63	60	54	69	65	61	59	53	59	58	53	50	50	45	42
	1.5	93	82	80	73	70	65	59	90	80	78	72	69	65	59	74	70	67	63	58	64	62	58	55	55	50	47
	2	101	88	90	80	80	73	68	98	86	87	79	79	73	67	82	77	75	71	67	73	70	66	63	63	58	55
	2.5	107	92	96	85	88	79	74	103	90	94	84	86	79	74	88	82	82	77	73	79	75	72	69	69	64	61
	3	110	95	101	89	93	83	79	106	93	98	87	91	82	78	92	85	87	81	77	83	79	76	73	73	68	65
	4	115	98	107	93	101	89	85	111	96	104	92	98	88	84	98	89	93	86	83	88	84	81	78	78	73	70
	5	118	100	112	96	106	92	89	114	98	108	95	103	91	88	101	92	97	89	86	92	87	85	82	82	77	74
	7	122	102	117	99	112	96	94	117	101	113	98	109	95	93	105	95	102	93	91	96	91	89	86	86	81	78
10	124	104	121	102	117	100	98	120	103	116	101	113	99	97	109	98	106	96	95	100	94	93	90	90	85	82	

配光曲線

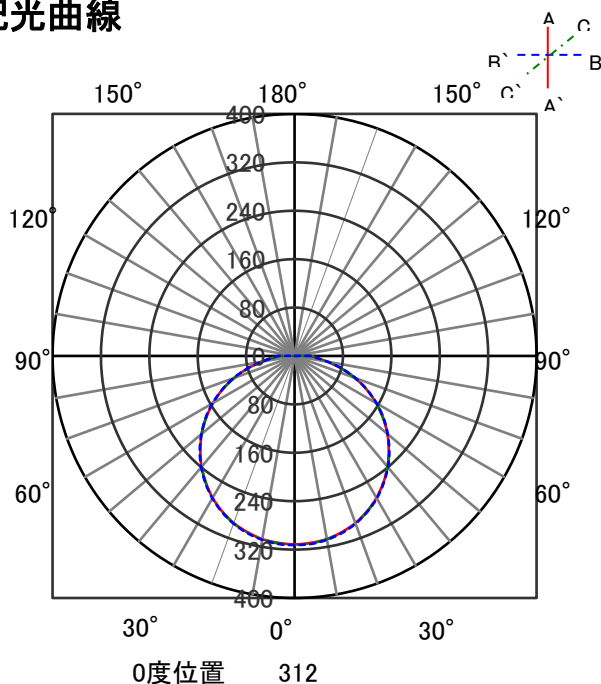


直射水平面照度

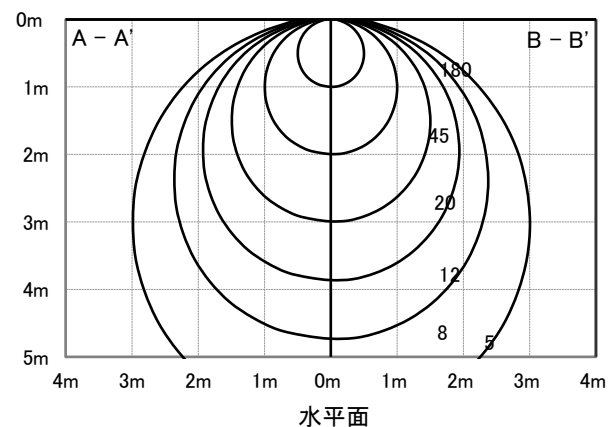

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSEYP25U-GX53B			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5WW-H-GX53-HE140			否	0.63
器具光束	574 lm	最大取付間隔		器具効率	
光源	LED	AA	1.29H	上方向	1%
光源光束	750 lm	BB	1.29H	下方向	99%
				全方向	100%




照明率表

作業面照明率(×0.01)																												
反射率 (%)	天井	80								70								50						30				0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0			
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0		
室 指 数	0.4	44	41	30	29	23	22	18	43	40	30	29	23	22	18	29	28	22	22	18	22	22	18	22	22	18	16	
	0.6	61	56	46	44	37	36	30	59	55	45	43	37	36	30	44	42	36	35	30	35	35	30	35	35	30	28	
	0.8	71	65	56	52	46	44	38	69	63	55	52	45	44	38	52	50	44	43	38	43	42	37	35	35	30	28	
	1	80	72	65	60	55	52	46	77	70	63	59	54	52	46	61	58	52	51	45	51	50	45	42	42	37	35	
	1.25	88	78	74	68	64	60	54	85	77	72	67	63	60	54	69	65	61	59	53	59	58	53	50	50	45	42	
	1.5	93	82	80	73	70	65	59	90	80	78	72	69	65	59	74	70	67	63	58	64	62	58	55	55	50	47	
	2	101	88	90	80	80	73	68	98	86	87	79	79	73	67	82	77	75	71	67	73	70	66	63	63	58	55	
	2.5	107	92	96	85	88	79	74	103	90	94	84	86	79	74	88	82	82	77	73	79	75	72	69	69	64	61	
	3	110	95	101	89	93	83	79	106	93	98	87	91	82	78	92	85	87	81	77	83	79	76	73	73	68	65	
	4	115	98	107	93	101	89	85	111	96	104	92	98	88	84	98	89	93	86	83	88	84	81	78	78	73	70	
	5	118	100	112	96	106	92	89	114	98	108	95	103	91	88	101	92	97	89	86	92	87	85	82	82	77	74	
	7	122	102	117	99	112	96	94	117	101	113	98	109	95	93	105	95	102	93	91	96	91	89	86	86	81	78	
10	124	104	121	102	117	100	98	120	103	116	101	113	99	97	109	98	106	96	95	100	94	93	90	90	85	82		

配光曲線

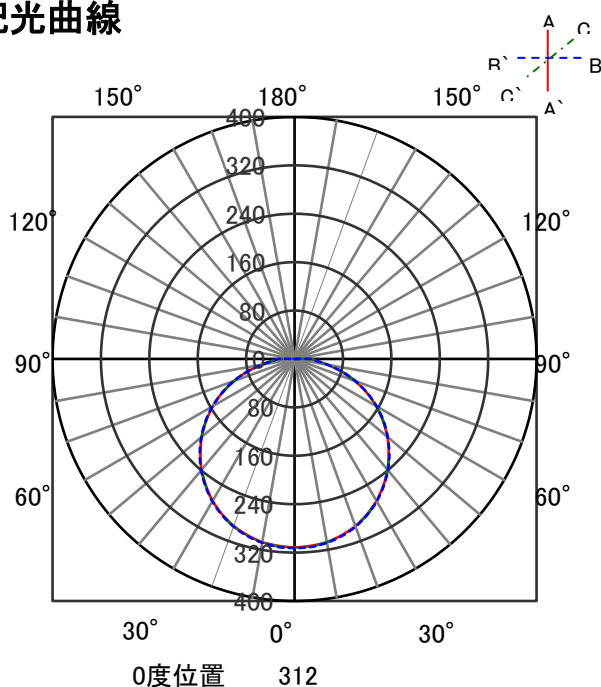


直射水平面照度

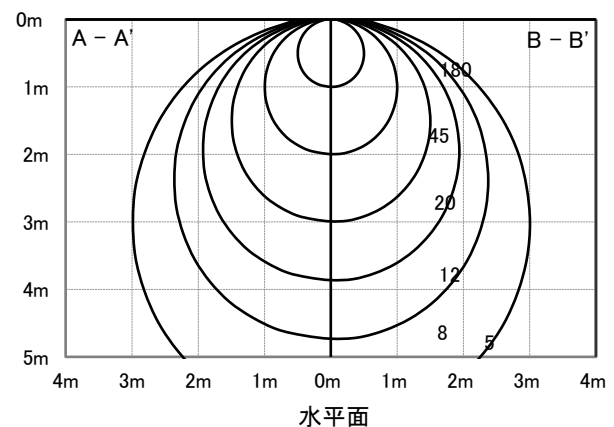

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSEYP25U-GX53B			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5L-H-GX53-HE140			否	0.63
器具光束	574 lm	最大取付間隔		器具効率	
光源	LED	AA	1.29H	上方向	1%
光源光束	750 lm	BB	1.29H	下方向	99%
				全方向	100%




照明率表

作業面照明率(×0.01)																												
反射率(%)	天井	80								70								50						30				0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0			
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0		
室指数	0.4	44	41	30	29	23	22	18	43	40	30	29	23	22	18	29	28	22	22	18	22	22	18	22	22	18	16	
	0.6	61	56	46	44	37	36	30	59	55	45	43	37	36	30	44	42	36	35	30	35	35	30	35	35	30	28	
	0.8	71	65	56	52	46	44	38	69	63	55	52	45	44	38	52	50	44	43	38	43	42	37	35	35	30	28	
	1	80	72	65	60	55	52	46	77	70	63	59	54	52	46	61	58	52	51	45	51	50	45	42	42	37	35	
	1.25	88	78	74	68	64	60	54	85	77	72	67	63	60	54	69	65	61	59	53	59	58	53	50	50	45	42	
	1.5	93	82	80	73	70	65	59	90	80	78	72	69	65	59	74	70	67	63	58	64	62	58	55	55	50	47	
	2	101	88	90	80	80	73	68	98	86	87	79	79	73	67	82	77	75	71	67	73	70	66	63	63	58	55	
	2.5	107	92	96	85	88	79	74	103	90	94	84	86	79	74	88	82	82	77	73	79	75	72	69	69	64	61	
	3	110	95	101	89	93	83	79	106	93	98	87	91	82	78	92	85	87	81	77	83	79	76	73	73	68	65	
	4	115	98	107	93	101	89	85	111	96	104	92	98	88	84	98	89	93	86	83	88	84	81	78	78	73	70	
	5	118	100	112	96	106	92	89	114	98	108	95	103	91	88	101	92	97	89	86	92	87	85	82	82	77	74	
	7	122	102	117	99	112	96	94	117	101	113	98	109	95	93	105	95	102	93	91	96	91	89	86	86	81	78	
10	124	104	121	102	117	100	98	120	103	116	101	113	99	97	109	98	106	96	95	100	94	93	90	90	85	82		

配光曲線

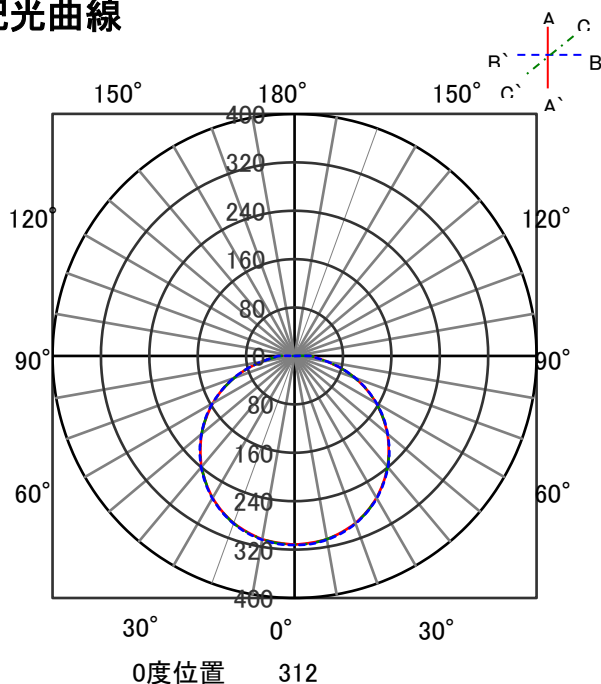


直射水平面照度

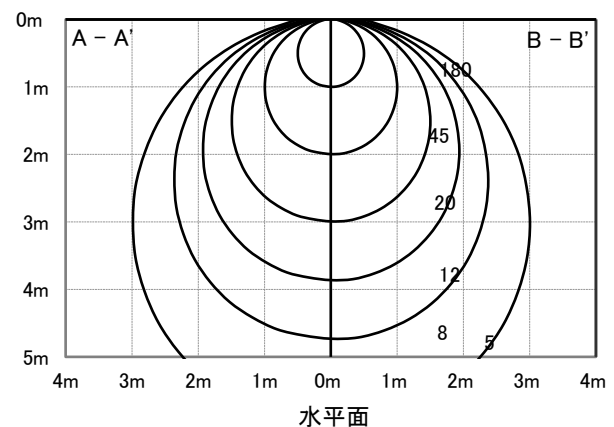

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSEYP25U-GX53B			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF7N-H-GX53			否	0.63
器具光束	574 lm	最大取付間隔		器具効率	
光源	LED	AA	1.29H	上方向	1%
光源光束	750 lm	BB	1.29H	下方向	99%
				全方向	100%




照明率表

作業面照明率(×0.01)																												
反射率 (%)	天井	80								70								50						30				0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0			
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0		
室 指 数	0.4	44	41	30	29	23	22	18	43	40	30	29	23	22	18	29	28	22	22	18	22	22	18	22	22	18	16	
	0.6	61	56	46	44	37	36	30	59	55	45	43	37	36	30	44	42	36	35	30	35	35	30	35	35	30	28	
	0.8	71	65	56	52	46	44	38	69	63	55	52	45	44	38	52	50	44	43	38	43	42	37	37	35	35	30	
	1	80	72	65	60	55	52	46	77	70	63	59	54	52	46	61	58	52	51	45	51	50	45	45	42	42	37	
	1.25	88	78	74	68	64	60	54	85	77	72	67	63	60	54	69	65	61	59	53	59	58	53	50	50	45	42	
	1.5	93	82	80	73	70	65	59	90	80	78	72	69	65	59	74	70	67	63	58	64	62	58	55	55	50	47	
	2	101	88	90	80	80	73	68	98	86	87	79	79	73	67	82	77	75	71	67	73	70	66	63	63	58	55	
	2.5	107	92	96	85	88	79	74	103	90	94	84	86	79	74	88	82	82	77	73	79	75	72	69	69	64	61	
	3	110	95	101	89	93	83	79	106	93	98	87	91	82	78	92	85	87	81	77	83	79	76	73	73	68	65	
	4	115	98	107	93	101	89	85	111	96	104	92	98	88	84	98	89	93	86	83	88	84	81	78	78	73	70	
	5	118	100	112	96	106	92	89	114	98	108	95	103	91	88	101	92	97	89	86	92	87	85	82	82	77	74	
	7	122	102	117	99	112	96	94	117	101	113	98	109	95	93	105	95	102	93	91	96	91	89	86	86	81	78	
10	124	104	121	102	117	100	98	120	103	116	101	113	99	97	109	98	106	96	95	100	94	93	90	90	85	82		

配光曲線

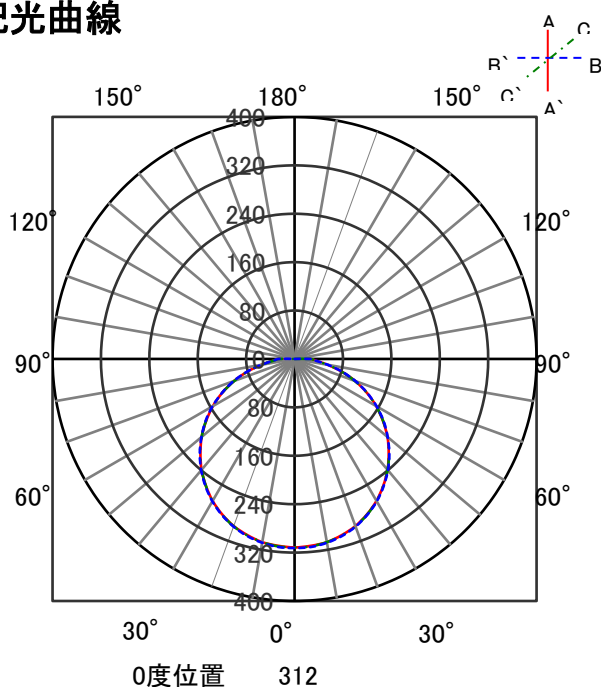


直射水平面照度

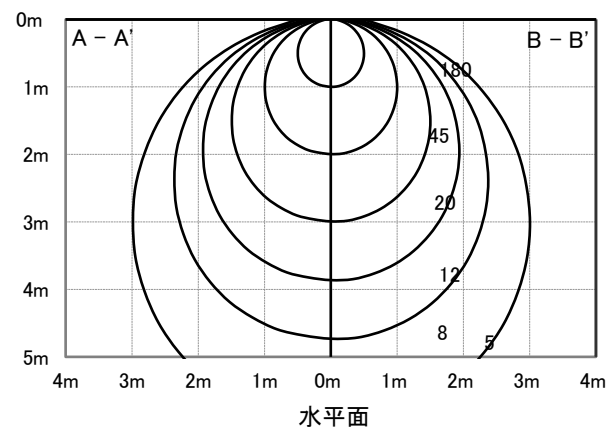

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSEYP25U-GX53B			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF7WW-H-GX53			否	0.63
器具光束	574 lm	最大取付間隔		器具効率	
光源	LED	AA	1.29H	上方向	1%
光源光束	750 lm	BB	1.29H	下方向	99%
				全方向	100%




照明率表

作業面照明率(×0.01)																												
反射率 (%)	天井	80								70								50						30				0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0			
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0		
室 指 数	0.4	44	41	30	29	23	22	18	43	40	30	29	23	22	18	29	28	22	22	18	22	22	18	22	22	18	16	
	0.6	61	56	46	44	37	36	30	59	55	45	43	37	36	30	44	42	36	35	30	35	35	30	35	35	30	28	
	0.8	71	65	56	52	46	44	38	69	63	55	52	45	44	38	52	50	44	43	38	43	42	37	35	35	30	28	
	1	80	72	65	60	55	52	46	77	70	63	59	54	52	46	61	58	52	51	45	51	50	45	42	42	37	35	
	1.25	88	78	74	68	64	60	54	85	77	72	67	63	60	54	69	65	61	59	53	59	58	53	50	50	45	42	
	1.5	93	82	80	73	70	65	59	90	80	78	72	69	65	59	74	70	67	63	58	64	62	58	55	55	50	47	
	2	101	88	90	80	80	73	68	98	86	87	79	79	73	67	82	77	75	71	67	73	70	66	63	63	58	55	
	2.5	107	92	96	85	88	79	74	103	90	94	84	86	79	74	88	82	82	77	73	79	75	72	69	69	64	61	
	3	110	95	101	89	93	83	79	106	93	98	87	91	82	78	92	85	87	81	77	83	79	76	73	73	68	65	
	4	115	98	107	93	101	89	85	111	96	104	92	98	88	84	98	89	93	86	83	88	84	81	78	78	73	70	
	5	118	100	112	96	106	92	89	114	98	108	95	103	91	88	101	92	97	89	86	92	87	85	82	82	77	74	
	7	122	102	117	99	112	96	94	117	101	113	98	109	95	93	105	95	102	93	91	96	91	89	86	86	81	78	
10	124	104	121	102	117	100	98	120	103	116	101	113	99	97	109	98	106	96	95	100	94	93	90	90	85	82		

配光曲線

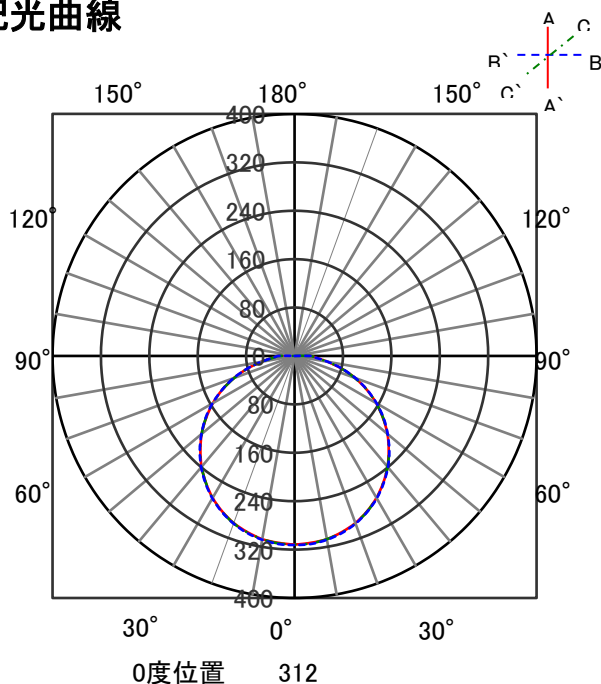


直射水平面照度

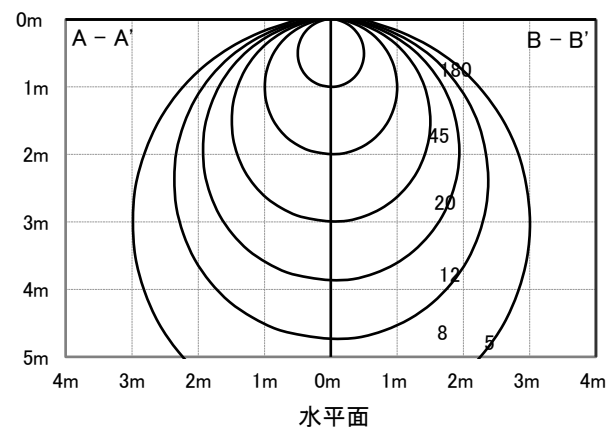

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSEYP25U-GX53B			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF7L-H-GX53			否	0.63
				器具効率	
器具光束	574 lm	最大取付間隔		上方向	1%
光源	LED	AA	1.29H	下方向	99%
光源光束	750 lm	BB	1.29H	全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率(%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	44	41	30	29	23	22	18	43	40	30	29	23	22	18	29	28	22	22	18	22	22	18	22	22	18	16
	0.6	61	56	46	44	37	36	30	59	55	45	43	37	36	30	44	42	36	35	30	35	35	30	35	35	30	28
	0.8	71	65	56	52	46	44	38	69	63	55	52	45	44	38	52	50	44	43	38	43	42	37	37	35	35	30
	1	80	72	65	60	55	52	46	77	70	63	59	54	52	46	61	58	52	51	45	51	50	45	45	42	42	37
	1.25	88	78	74	68	64	60	54	85	77	72	67	63	60	54	69	65	61	59	53	59	58	53	50	50	45	42
	1.5	93	82	80	73	70	65	59	90	80	78	72	69	65	59	74	70	67	63	58	64	62	58	55	55	50	47
	2	101	88	90	80	80	73	68	98	86	87	79	79	73	67	82	77	75	71	67	73	70	66	63	63	58	55
	2.5	107	92	96	85	88	79	74	103	90	94	84	86	79	74	88	82	82	77	73	79	75	72	69	69	64	61
	3	110	95	101	89	93	83	79	106	93	98	87	91	82	78	92	85	87	81	77	83	79	76	73	73	68	65
	4	115	98	107	93	101	89	85	111	96	104	92	98	88	84	98	89	93	86	83	88	84	81	78	78	73	70
	5	118	100	112	96	106	92	89	114	98	108	95	103	91	88	101	92	97	89	86	92	87	85	82	82	77	74
	7	122	102	117	99	112	96	94	117	101	113	98	109	95	93	105	95	102	93	91	96	91	89	86	86	81	78
10	124	104	121	102	117	100	98	120	103	116	101	113	99	97	109	98	106	96	95	100	94	93	90	90	85	82	

配光曲線

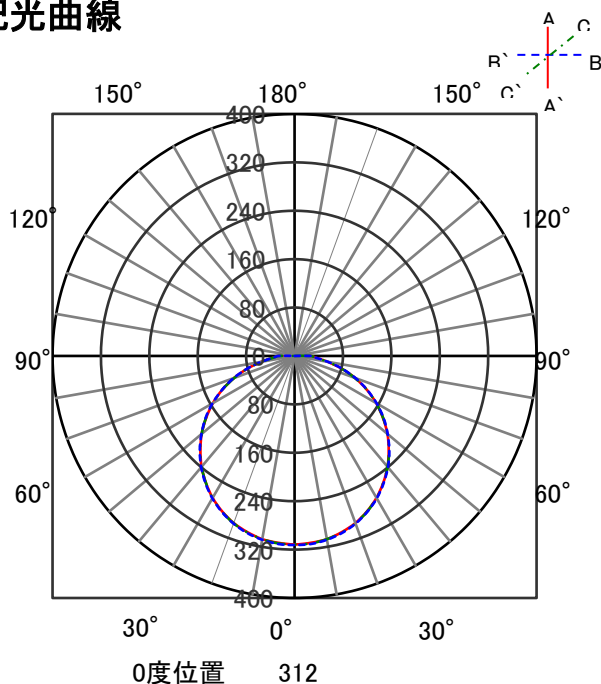


直射水平面照度

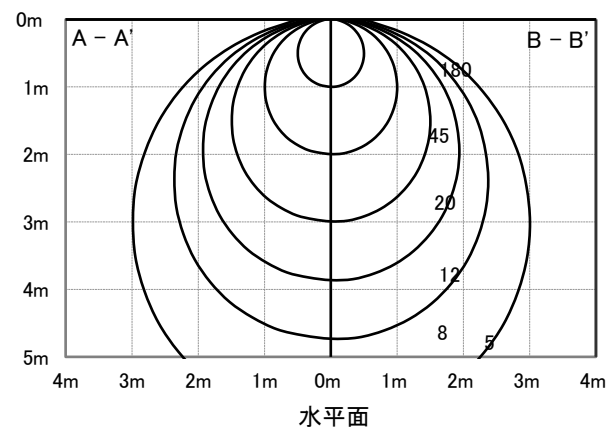

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
				良	0.69
器具品番	NSEYP25U-GX53B			中	0.67
光源品名	GX53口金LEDランプ			否	0.63
光源品番	LDF7N-H-GX53-D			器具効率	
器具光束	574 lm	最大取付間隔		上方向	1%
光源	LED	AA	1.29H	下方向	99%
光源光束	750 lm	BB	1.29H	全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	44	41	30	29	23	22	18	43	40	30	29	23	22	18	29	28	22	22	18	22	22	18	22	18	16	
	0.6	61	56	46	44	37	36	30	59	55	45	43	37	36	30	44	42	36	35	30	35	35	30	35	30	28	
	0.8	71	65	56	52	46	44	38	69	63	55	52	45	44	38	52	50	44	43	38	43	42	37	37	35		
	1	80	72	65	60	55	52	46	77	70	63	59	54	52	46	61	58	52	51	45	51	50	45	45	42		
	1.25	88	78	74	68	64	60	54	85	77	72	67	63	60	54	69	65	61	59	53	59	58	53	53	50		
	1.5	93	82	80	73	70	65	59	90	80	78	72	69	65	59	74	70	67	63	58	64	62	58	58	55		
	2	101	88	90	80	80	73	68	98	86	87	79	79	73	67	82	77	75	71	67	73	70	66	63			
	2.5	107	92	96	85	88	79	74	103	90	94	84	86	79	74	88	82	82	77	73	79	75	72	69			
	3	110	95	101	89	93	83	79	106	93	98	87	91	82	78	92	85	87	81	77	83	79	76	73			
	4	115	98	107	93	101	89	85	111	96	104	92	98	88	84	98	89	93	86	83	88	84	81	78			
	5	118	100	112	96	106	92	89	114	98	108	95	103	91	88	101	92	97	89	86	92	87	85	82			
	7	122	102	117	99	112	96	94	117	101	113	98	109	95	93	105	95	102	93	91	96	91	89	86			
10	124	104	121	102	117	100	98	120	103	116	101	113	99	97	109	98	106	96	95	100	94	93	90				

配光曲線

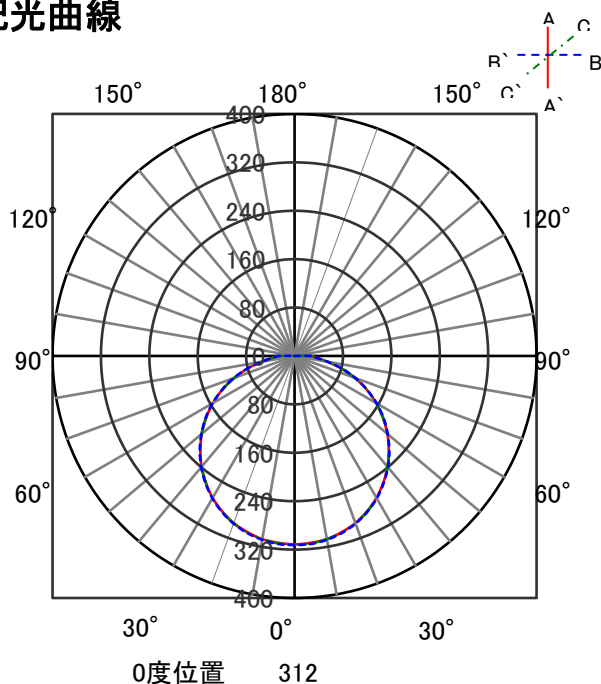


直射水平面照度

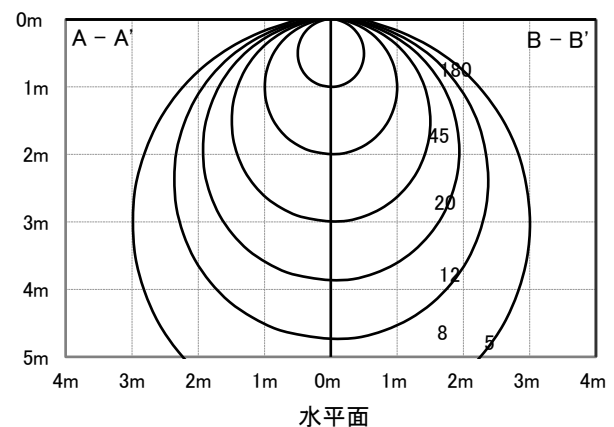

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSEYP25U-GX53B			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF7WW-H-GX53-D			否	0.63
器具光束	574 lm	最大取付間隔		器具効率	
光源	LED	AA	1.29H	上方向	1%
光源光束	750 lm	BB	1.29H	下方向	99%
				全方向	100%




照明率表

作業面照明率(×0.01)																												
反射率 (%)	天井	80								70								50						30				0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0			
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0		
室 指 数	0.4	44	41	30	29	23	22	18	43	40	30	29	23	22	18	29	28	22	22	18	22	22	18	22	22	18	16	
	0.6	61	56	46	44	37	36	30	59	55	45	43	37	36	30	44	42	36	35	30	35	35	30	35	35	30	28	
	0.8	71	65	56	52	46	44	38	69	63	55	52	45	44	38	52	50	44	43	38	43	42	37	37	35	35	30	
	1	80	72	65	60	55	52	46	77	70	63	59	54	52	46	61	58	52	51	45	51	50	45	45	42	42	37	
	1.25	88	78	74	68	64	60	54	85	77	72	67	63	60	54	69	65	61	59	53	59	58	53	50	50	45	42	
	1.5	93	82	80	73	70	65	59	90	80	78	72	69	65	59	74	70	67	63	58	64	62	58	55	55	50	47	
	2	101	88	90	80	80	73	68	98	86	87	79	79	73	67	82	77	75	71	67	73	70	66	63	63	58	55	
	2.5	107	92	96	85	88	79	74	103	90	94	84	86	79	74	88	82	82	77	73	79	75	72	69	69	64	61	
	3	110	95	101	89	93	83	79	106	93	98	87	91	82	78	92	85	87	81	77	83	79	76	73	73	68	65	
	4	115	98	107	93	101	89	85	111	96	104	92	98	88	84	98	89	93	86	83	88	84	81	78	78	73	70	
	5	118	100	112	96	106	92	89	114	98	108	95	103	91	88	101	92	97	89	86	92	87	85	82	82	77	74	
	7	122	102	117	99	112	96	94	117	101	113	98	109	95	93	105	95	102	93	91	96	91	89	86	86	81	78	
10	124	104	121	102	117	100	98	120	103	116	101	113	99	97	109	98	106	96	95	100	94	93	90	90	85	82		

配光曲線

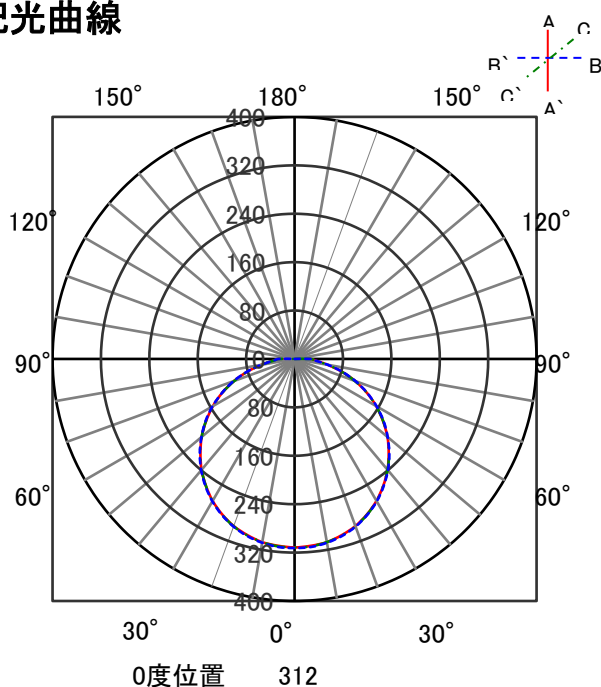


直射水平面照度

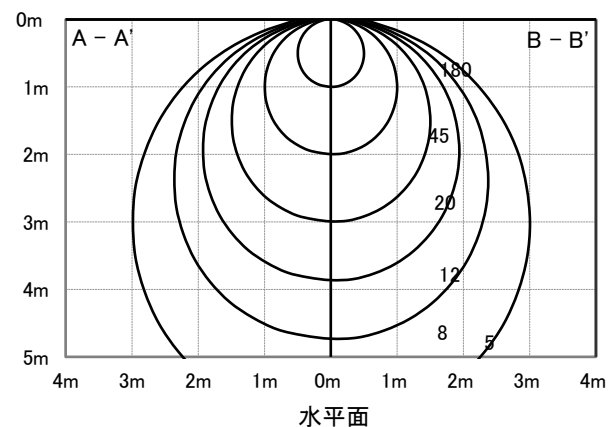

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSEYP25U-GX53B			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF7L-H-GX53-D			否	0.63
器具光束	574 lm	最大取付間隔		器具効率	
光源	LED	AA	1.29H	上方向	1%
光源光束	750 lm	BB	1.29H	下方向	99%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	44	41	30	29	23	22	18	43	40	30	29	23	22	18	29	28	22	22	18	22	22	18	22	22	18	16
	0.6	61	56	46	44	37	36	30	59	55	45	43	37	36	30	44	42	36	35	30	35	35	30	35	35	30	28
	0.8	71	65	56	52	46	44	38	69	63	55	52	45	44	38	52	50	44	43	38	43	42	37	35	35	30	28
	1	80	72	65	60	55	52	46	77	70	63	59	54	52	46	61	58	52	51	45	51	50	45	42	42	37	35
	1.25	88	78	74	68	64	60	54	85	77	72	67	63	60	54	69	65	61	59	53	59	58	53	50	50	45	42
	1.5	93	82	80	73	70	65	59	90	80	78	72	69	65	59	74	70	67	63	58	64	62	58	55	55	50	47
	2	101	88	90	80	80	73	68	98	86	87	79	79	73	67	82	77	75	71	67	73	70	66	63	63	58	55
	2.5	107	92	96	85	88	79	74	103	90	94	84	86	79	74	88	82	82	77	73	79	75	72	69	69	64	61
	3	110	95	101	89	93	83	79	106	93	98	87	91	82	78	92	85	87	81	77	83	79	76	73	73	68	65
	4	115	98	107	93	101	89	85	111	96	104	92	98	88	84	98	89	93	86	83	88	84	81	78	78	73	70
	5	118	100	112	96	106	92	89	114	98	108	95	103	91	88	101	92	97	89	86	92	87	85	82	82	77	74
	7	122	102	117	99	112	96	94	117	101	113	98	109	95	93	105	95	102	93	91	96	91	89	86	86	81	78
10	124	104	121	102	117	100	98	120	103	116	101	113	99	97	109	98	106	96	95	100	94	93	90	90	85	82	

配光曲線

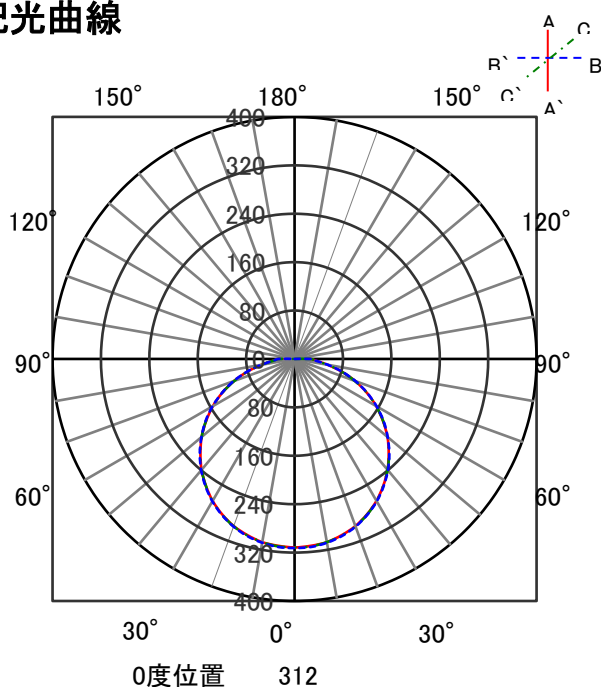


直射水平面照度

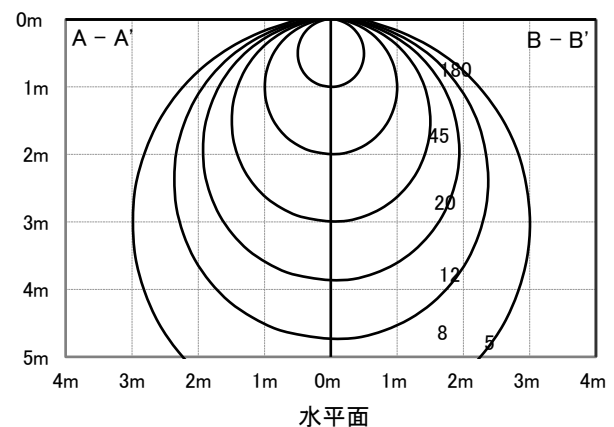

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSEYP25U-GX53B			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF10N-H-GX53			否	0.63
器具光束	918 lm	最大取付間隔		器具効率	
光源	LED	AA	1.3H	上方向	1%
光源光束	1200 lm	BB	1.3H	下方向	99%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	44	41	30	29	22	22	17	43	40	30	29	22	22	17	29	28	22	21	17	21	21	17	15			
	0.6	60	56	45	43	36	35	30	58	54	44	42	36	35	30	43	41	35	34	29	34	34	29	27			
	0.8	70	64	55	52	45	43	37	68	62	54	51	45	43	37	52	49	43	42	37	42	41	36	34			
	1	79	71	64	59	54	51	45	76	69	63	58	53	51	45	60	57	52	50	44	50	49	44	41			
	1.25	87	78	73	67	63	59	53	84	76	71	66	62	59	53	68	64	60	58	52	58	56	52	49			
	1.5	93	82	79	72	69	64	58	89	80	77	71	68	64	58	73	69	66	62	57	63	61	57	54			
	2	101	88	89	79	79	72	67	97	86	86	78	78	72	66	81	76	74	70	65	71	69	65	62			
	2.5	106	92	96	84	87	78	73	102	90	93	83	85	78	73	87	81	81	76	72	78	74	71	68			
	3	110	94	100	88	92	82	78	105	92	97	87	90	81	77	91	84	86	80	76	82	78	75	72			
	4	114	97	107	92	100	88	84	110	96	103	91	97	87	83	97	88	92	85	82	87	83	80	77			
	5	118	99	111	95	105	91	88	113	98	107	94	102	90	87	100	91	96	88	85	91	86	84	81			
	7	121	102	116	99	111	96	93	116	100	112	97	108	95	92	105	95	101	92	90	95	90	89	85			
10	124	104	120	101	117	99	97	119	102	116	100	113	98	96	108	98	105	96	94	99	94	92	89				

配光曲線

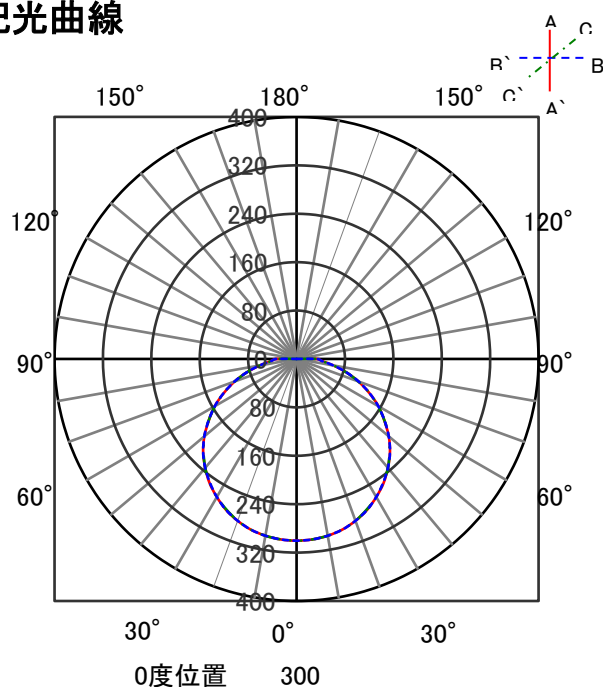


直射水平面照度

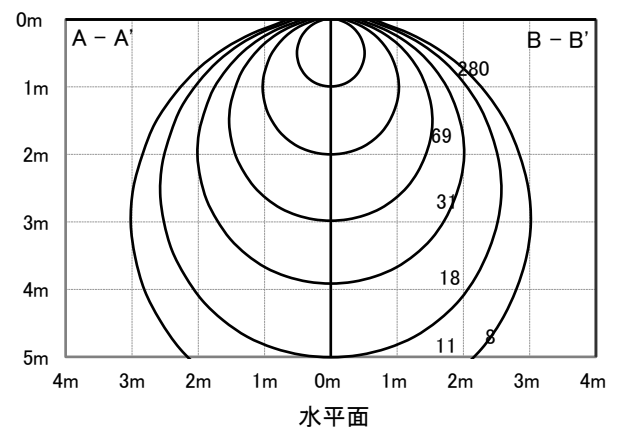

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
				良	0.69
器具品番	NSEYP25U-GX53B			中	0.67
光源品名	GX53口金LEDランプ			否	0.63
光源品番	LDF10WW-H-GX53			器具効率	
器具光束	918 lm	最大取付間隔		上方向	1%
光源	LED	AA	1.3H	下方向	99%
光源光束	1200 lm	BB	1.3H	全方向	100%




照明率表

作業面照明率(×0.01)																								
反 射 率 (%)	天井	80								70								50						0
	壁	70		50		30		10		70		50		30		10		50		30		10		0
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10
室 指 数	0.4	44	41	30	29	22	22	17	43	40	30	29	22	22	17	29	28	22	21	17	21	21	17	15
	0.6	60	56	45	43	36	35	30	58	54	44	42	36	35	30	43	41	35	34	29	34	34	29	27
	0.8	70	64	55	52	45	43	37	68	62	54	51	45	43	37	52	49	43	42	37	42	41	36	34
	1	79	71	64	59	54	51	45	76	69	63	58	53	51	45	60	57	52	50	44	50	49	44	41
	1.25	87	78	73	67	63	59	53	84	76	71	66	62	59	53	68	64	60	58	52	58	56	52	49
	1.5	93	82	79	72	69	64	58	89	80	77	71	68	64	58	73	69	66	62	57	63	61	57	54
	2	101	88	89	79	79	72	67	97	86	86	78	78	72	66	81	76	74	70	65	71	69	65	62
	2.5	106	92	96	84	87	78	73	102	90	93	83	85	78	73	87	81	81	76	72	78	74	71	68
	3	110	94	100	88	92	82	78	105	92	97	87	90	81	77	91	84	86	80	76	82	78	75	72
	4	114	97	107	92	100	88	84	110	96	103	91	97	87	83	97	88	92	85	82	87	83	80	77
	5	118	99	111	95	105	91	88	113	98	107	94	102	90	87	100	91	96	88	85	91	86	84	81
	7	121	102	116	99	111	96	93	116	100	112	97	108	95	92	105	95	101	92	90	95	90	89	85
	10	124	104	120	101	117	99	97	119	102	116	100	113	98	96	108	98	105	96	94	99	94	92	89

配光曲線

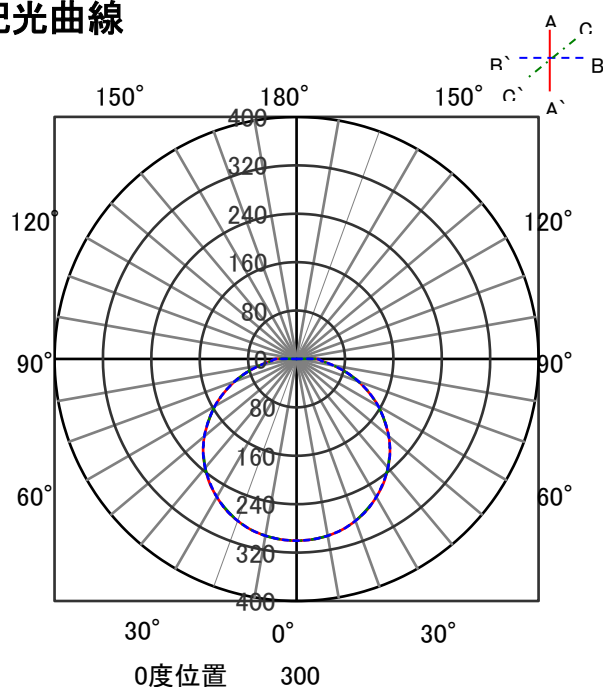


直射水平面照度

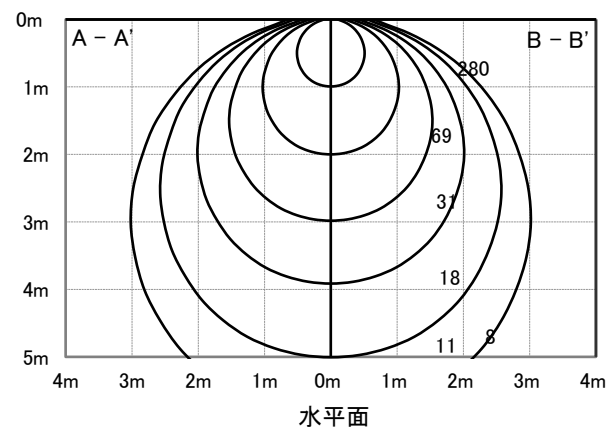

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	軒下シーリングライト			保守率	
器具品番	NSEYP25U-GX53B			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF10L-H-GX53			否	0.63
器具光束	918 lm	最大取付間隔		器具効率	
光源	LED	AA	1.3H	上方向	1%
光源光束	1200 lm	BB	1.3H	下方向	99%
				全方向	100%



照明率表

作業面照明率(×0.01)																								
反射率(%)	天井	80								70								50						0
	壁	70		50		30		10		70		50		30		10		50		30		10		0
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10
室指数	0.4	44	41	30	29	22	22	17	43	40	30	29	22	22	17	29	28	22	21	17	21	21	17	15
	0.6	60	56	45	43	36	35	30	58	54	44	42	36	35	30	43	41	35	34	29	34	34	29	27
	0.8	70	64	55	52	45	43	37	68	62	54	51	45	43	37	52	49	43	42	37	42	41	36	34
	1	79	71	64	59	54	51	45	76	69	63	58	53	51	45	60	57	52	50	44	50	49	44	41
	1.25	87	78	73	67	63	59	53	84	76	71	66	62	59	53	68	64	60	58	52	58	56	52	49
	1.5	93	82	79	72	69	64	58	89	80	77	71	68	64	58	73	69	66	62	57	63	61	57	54
	2	101	88	89	79	79	72	67	97	86	86	78	78	72	66	81	76	74	70	65	71	69	65	62
	2.5	106	92	96	84	87	78	73	102	90	93	83	85	78	73	87	81	81	76	72	78	74	71	68
	3	110	94	100	88	92	82	78	105	92	97	87	90	81	77	91	84	86	80	76	82	78	75	72
	4	114	97	107	92	100	88	84	110	96	103	91	97	87	83	97	88	92	85	82	87	83	80	77
	5	118	99	111	95	105	91	88	113	98	107	94	102	90	87	100	91	96	88	85	91	86	84	81
	7	121	102	116	99	111	96	93	116	100	112	97	108	95	92	105	95	101	92	90	95	90	89	85
	10	124	104	120	101	117	99	97	119	102	116	100	113	98	96	108	98	105	96	94	99	94	92	89

配光曲線

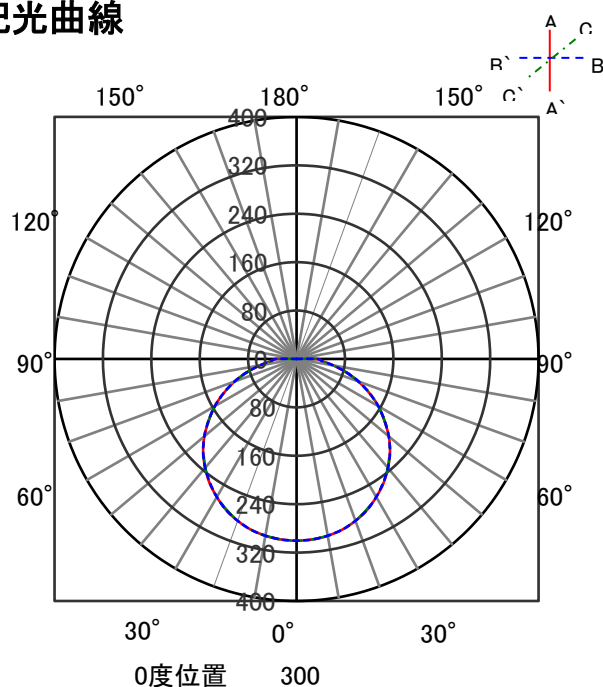

直射水平面照度

