


ECOHiLUX照明器具 配光データシート


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-S190			良	0.67
光源品名	GX53口金LEDランプ			中	0.63
光源品番	LDF3N-H-GX53-HE140			否	0.56
				器具効率	
器具光束	389 lm	最大取付間隔		上方向	0%
光源	LED	AA	1.22H	下方向	100%
光源光束	480 lm	BB	1.22H	全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	49	46	36	35	29	29	24	48	45	36	35	29	28	24	35	34	29	28	24	28	28	24	23			
	0.6	68	63	55	52	47	45	40	67	62	54	52	46	45	40	53	51	46	44	40	45	44	40	38			
	0.8	78	71	65	61	56	54	49	76	70	64	60	55	53	48	62	59	54	53	48	53	52	48	46			
	1	87	78	74	69	65	62	57	85	77	73	68	65	62	57	70	67	63	61	56	62	60	56	54			
	1.25	96	85	84	77	75	71	66	93	84	82	76	74	70	66	79	74	72	69	65	70	68	65	63			
	1.5	100	88	89	81	81	75	70	97	87	87	80	80	75	70	84	78	77	73	69	75	72	69	67			
	2	107	93	98	87	90	82	78	104	92	95	86	88	82	78	91	84	85	80	77	82	79	76	74			
	2.5	112	97	104	92	97	87	84	109	95	101	91	95	87	83	96	89	91	85	82	88	84	81	79			
	3	115	99	108	94	101	90	87	111	97	105	93	99	90	87	99	91	95	88	85	91	87	84	82			
	4	119	101	113	98	108	95	92	115	100	109	97	105	94	91	103	95	100	92	90	95	90	88	86			
	5	121	103	116	100	112	97	95	117	101	113	99	109	96	94	106	97	103	95	93	98	93	91	89			
	7	124	104	120	102	117	100	98	120	103	116	101	113	99	98	109	99	107	97	96	101	96	94	92			
10	126	106	123	104	121	103	101	122	104	119	103	117	102	100	111	101	110	100	98	103	98	97	94				

配光曲線

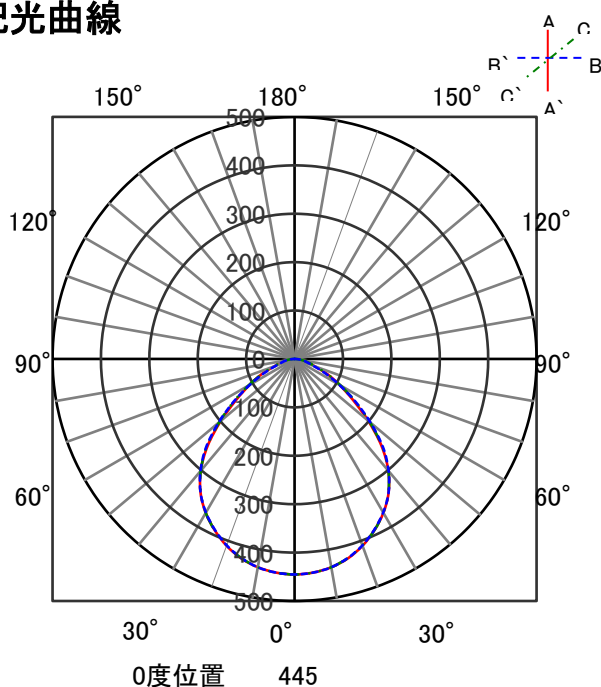


直射水平面照度

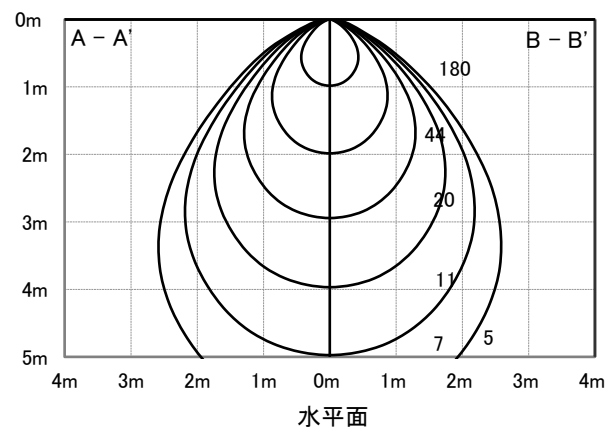

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-S190			良	0.67
光源品名	GX53口金LEDランプ			中	0.63
光源品番	LDF3WW-H-GX53-HE140			否	0.56
器具光束	389 lm	最大取付間隔		器具効率	
光源	LED	AA	1.22H	上方向	0%
光源光束	480 lm	BB	1.22H	下方向	100%
				全方向	100%




照明率表

作業面照明率(×0.01)																								
反射率(%)	天井	80								70								50						0
	壁	70				50				30				10				50			30			0
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0
室 指 数	0.4	49	46	36	35	29	29	24	48	45	36	35	29	28	24	35	34	29	28	24	28	28	24	23
	0.6	68	63	55	52	47	45	40	67	62	54	52	46	45	40	53	51	46	44	40	45	44	40	38
	0.8	78	71	65	61	56	54	49	76	70	64	60	55	53	48	62	59	54	53	48	53	52	48	46
	1	87	78	74	69	65	62	57	85	77	73	68	65	62	57	70	67	63	61	56	62	60	56	54
	1.25	96	85	84	77	75	71	66	93	84	82	76	74	70	66	79	74	72	69	65	70	68	65	63
	1.5	100	88	89	81	81	75	70	97	87	87	80	80	75	70	84	78	77	73	69	75	72	69	67
	2	107	93	98	87	90	82	78	104	92	95	86	88	82	78	91	84	85	80	77	82	79	76	74
	2.5	112	97	104	92	97	87	84	109	95	101	91	95	87	83	96	89	91	85	82	88	84	81	79
	3	115	99	108	94	101	90	87	111	97	105	93	99	90	87	99	91	95	88	85	91	87	84	82
	4	119	101	113	98	108	95	92	115	100	109	97	105	94	91	103	95	100	92	90	95	90	88	86
	5	121	103	116	100	112	97	95	117	101	113	99	109	96	94	106	97	103	95	93	98	93	91	89
	7	124	104	120	102	117	100	98	120	103	116	101	113	99	98	109	99	107	97	96	101	96	94	92
	10	126	106	123	104	121	103	101	122	104	119	103	117	102	100	111	101	110	100	98	103	98	97	94

配光曲線

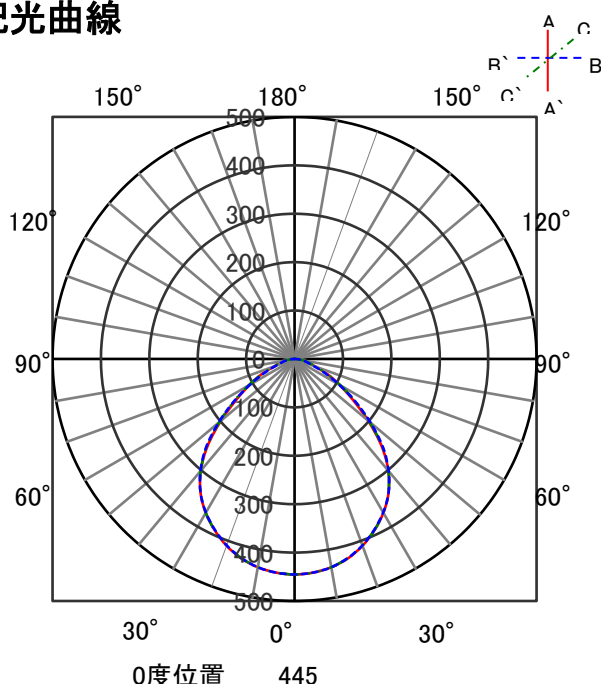


直射水平面照度

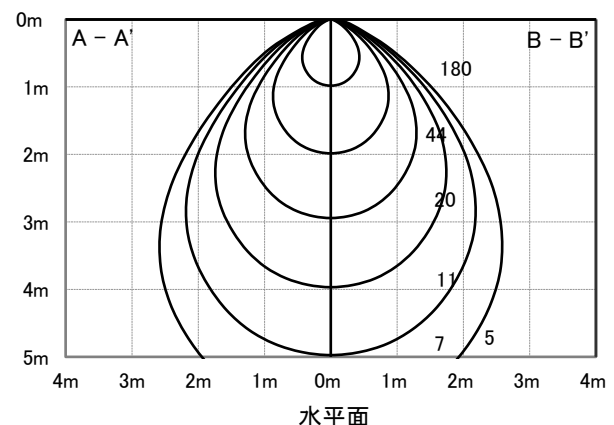

ECOHiLUX照明器具 配光データシート


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-S190			良	0.67
光源品名	GX53口金LEDランプ			中	0.63
光源品番	LDF3L-H-GX53-HE140			否	0.56
				器具効率	
器具光束	389 lm	最大取付間隔		上方向	0%
光源	LED	AA	1.22H	下方向	100%
光源光束	480 lm	BB	1.22H	全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	49	46	36	35	29	29	24	48	45	36	35	29	28	24	35	34	29	28	24	28	28	24	23			
	0.6	68	63	55	52	47	45	40	67	62	54	52	46	45	40	53	51	46	44	40	45	44	40	38			
	0.8	78	71	65	61	56	54	49	76	70	64	60	55	53	48	62	59	54	53	48	53	52	48	46			
	1	87	78	74	69	65	62	57	85	77	73	68	65	62	57	70	67	63	61	56	62	60	56	54			
	1.25	96	85	84	77	75	71	66	93	84	82	76	74	70	66	79	74	72	69	65	70	68	65	63			
	1.5	100	88	89	81	81	75	70	97	87	87	80	80	75	70	84	78	77	73	69	75	72	69	67			
	2	107	93	98	87	90	82	78	104	92	95	86	88	82	78	91	84	85	80	77	82	79	76	74			
	2.5	112	97	104	92	97	87	84	109	95	101	91	95	87	83	96	89	91	85	82	88	84	81	79			
	3	115	99	108	94	101	90	87	111	97	105	93	99	90	87	99	91	95	88	85	91	87	84	82			
	4	119	101	113	98	108	95	92	115	100	109	97	105	94	91	103	95	100	92	90	95	90	88	86			
	5	121	103	116	100	112	97	95	117	101	113	99	109	96	94	106	97	103	95	93	98	93	91	89			
	7	124	104	120	102	117	100	98	120	103	116	101	113	99	98	109	99	107	97	96	101	96	94	92			
10	126	106	123	104	121	103	101	122	104	119	103	117	102	100	111	101	110	100	98	103	98	97	94				

配光曲線

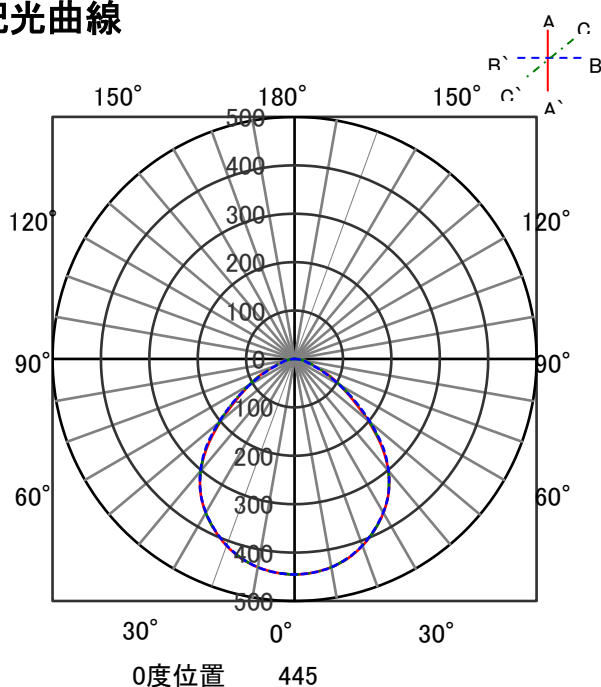


直射水平面照度

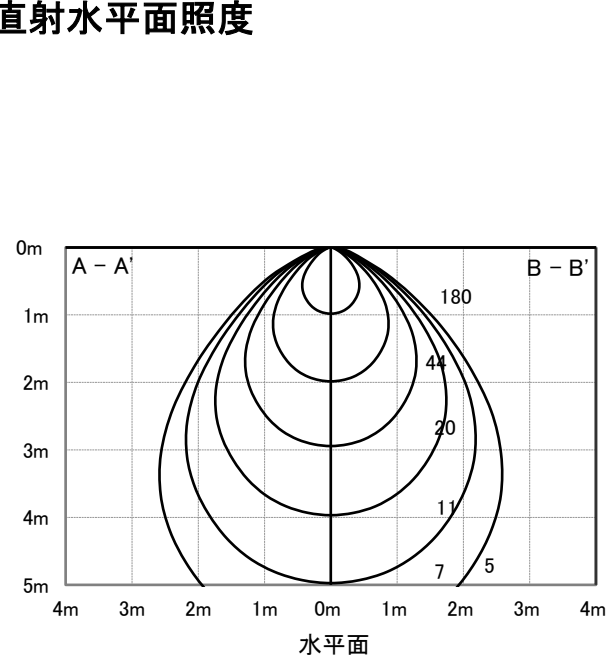

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-S190			良	0.67
光源品名	GX53口金LEDランプ			中	0.63
光源品番	LDF5N-H-GX53			否	0.56
器具光束	414 lm	最大取付間隔		器具効率	
光源	LED	AA	1.22H	上方向	0%
光源光束	510 lm	BB	1.22H	下方向	100%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	49	46	36	35	29	29	24	48	45	36	35	29	28	24	35	34	29	28	24	28	28	24	23	23	23	
	0.6	68	63	55	52	47	45	40	67	62	54	52	46	45	40	53	51	46	44	40	45	44	40	38	38	38	
	0.8	78	71	65	61	56	54	49	76	70	64	60	55	53	48	62	59	54	53	48	53	52	48	46	46	46	
	1	87	78	74	69	65	62	57	85	77	73	68	65	62	57	70	67	63	61	56	62	60	56	54	54	54	
	1.25	96	85	84	77	75	71	66	93	84	82	76	74	70	66	79	74	72	69	65	70	68	65	63	63	63	
	1.5	100	88	89	81	81	75	70	97	87	87	80	80	75	70	84	78	77	73	69	75	72	69	67	67	67	
	2	107	93	98	87	90	82	78	104	92	95	86	88	82	78	91	84	85	80	77	82	79	76	74	74	74	
	2.5	112	97	104	92	97	87	84	109	95	101	91	95	87	83	96	89	91	85	82	88	84	81	79	79	79	
	3	115	99	108	94	101	90	87	111	97	105	93	99	90	87	99	91	95	88	85	91	87	84	82	82	82	82
	4	119	101	113	98	108	95	92	115	100	109	97	105	94	91	103	95	100	92	90	95	90	88	86	86	86	86
	5	121	103	116	100	112	97	95	117	101	113	99	109	96	94	106	97	103	95	93	98	93	91	89	89	89	89
	7	124	104	120	102	117	100	98	120	103	116	101	113	99	98	109	99	107	97	96	101	96	94	92	92	92	92
10	126	106	123	104	121	103	101	122	104	119	103	117	102	100	111	101	110	100	98	103	98	97	94	94	94	94	

配光曲線

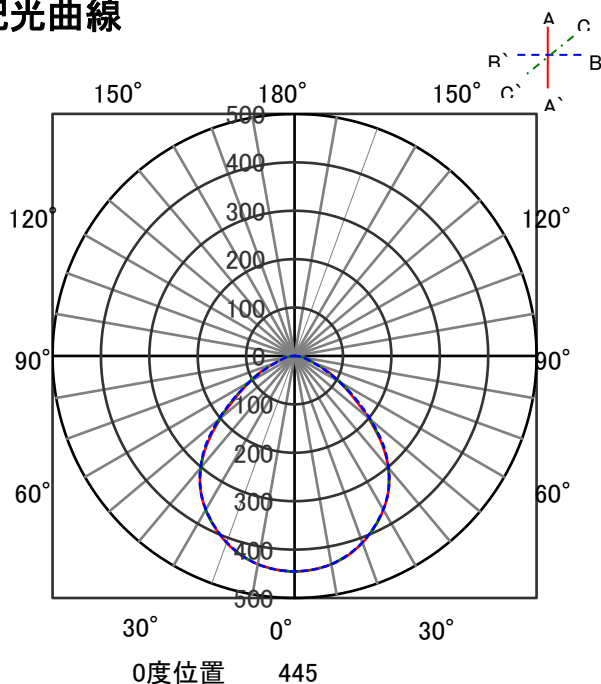


直射水平面照度

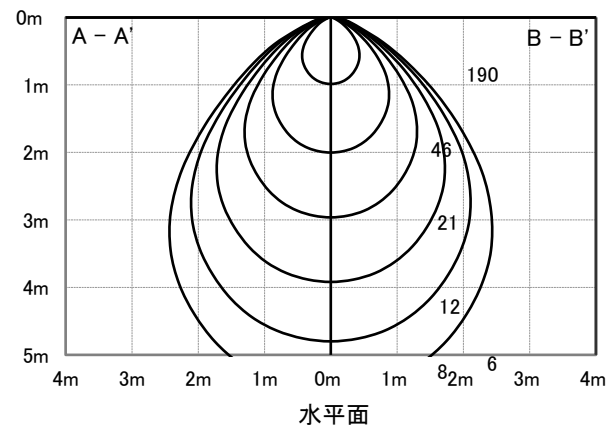

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-S190			良	0.67
光源品名	GX53口金LEDランプ			中	0.63
光源品番	LDF5L-H-GX53			否	0.56
器具光束	414 lm	最大取付間隔		器具効率	
光源	LED	AA	1.22H	上方向	0%
光源光束	510 lm	BB	1.22H	下方向	100%
				全方向	100%




照明率表

作業面照明率(×0.01)																								
反射率(%)	天井	80								70								50						0
	壁	70				50				30				10				50			30			0
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0
室 指 数	0.4	49	46	36	35	29	29	24	48	45	36	35	29	28	24	35	34	29	28	24	28	28	24	23
	0.6	68	63	55	52	47	45	40	67	62	54	52	46	45	40	53	51	46	44	40	45	44	40	38
	0.8	78	71	65	61	56	54	49	76	70	64	60	55	53	48	62	59	54	53	48	53	52	48	46
	1	87	78	74	69	65	62	57	85	77	73	68	65	62	57	70	67	63	61	56	62	60	56	54
	1.25	96	85	84	77	75	71	66	93	84	82	76	74	70	66	79	74	72	69	65	70	68	65	63
	1.5	100	88	89	81	81	75	70	97	87	87	80	80	75	70	84	78	77	73	69	75	72	69	67
	2	107	93	98	87	90	82	78	104	92	95	86	88	82	78	91	84	85	80	77	82	79	76	74
	2.5	112	97	104	92	97	87	84	109	95	101	91	95	87	83	96	89	91	85	82	88	84	81	79
	3	115	99	108	94	101	90	87	111	97	105	93	99	90	87	99	91	95	88	85	91	87	84	82
	4	119	101	113	98	108	95	92	115	100	109	97	105	94	91	103	95	100	92	90	95	90	88	86
	5	121	103	116	100	112	97	95	117	101	113	99	109	96	94	106	97	103	95	93	98	93	91	89
	7	124	104	120	102	117	100	98	120	103	116	101	113	99	98	109	99	107	97	96	101	96	94	92
	10	126	106	123	104	121	103	101	122	104	119	103	117	102	100	111	101	110	100	98	103	98	97	94

配光曲線

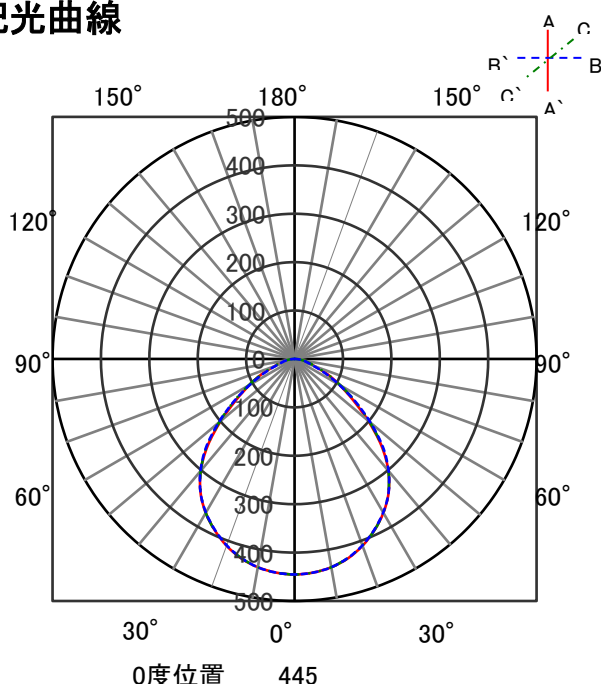


直射水平面照度

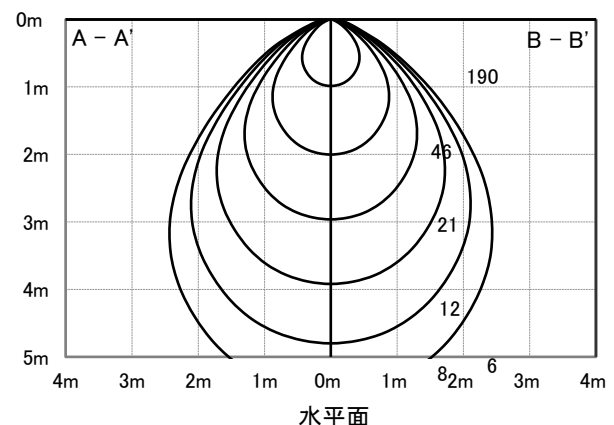

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-S190			良	0.67
光源品名	GX53口金LEDランプ			中	0.63
光源品番	LDF5WW-H-GX53			否	0.56
器具光束	414 lm	最大取付間隔		器具効率	
光源	LED	AA	1.22H	上方向	0%
光源光束	510 lm	BB	1.22H	下方向	100%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	49	46	36	35	29	29	24	48	45	36	35	29	28	24	35	34	29	28	24	28	28	24	23	23		
	0.6	68	63	55	52	47	45	40	67	62	54	52	46	45	40	53	51	46	44	40	45	44	40	38	38		
	0.8	78	71	65	61	56	54	49	76	70	64	60	55	53	48	62	59	54	53	48	53	52	48	46	46		
	1	87	78	74	69	65	62	57	85	77	73	68	65	62	57	70	67	63	61	56	62	60	56	54	54		
	1.25	96	85	84	77	75	71	66	93	84	82	76	74	70	66	79	74	72	69	65	70	68	65	63	63		
	1.5	100	88	89	81	81	75	70	97	87	87	80	80	75	70	84	78	77	73	69	75	72	69	67	67		
	2	107	93	98	87	90	82	78	104	92	95	86	88	82	78	91	84	85	80	77	82	79	76	74	74		
	2.5	112	97	104	92	97	87	84	109	95	101	91	95	87	83	96	89	91	85	82	88	84	81	79	79		
	3	115	99	108	94	101	90	87	111	97	105	93	99	90	87	99	91	95	88	85	91	87	84	82	82		
	4	119	101	113	98	108	95	92	115	100	109	97	105	94	91	103	95	100	92	90	95	90	88	86	86		
	5	121	103	116	100	112	97	95	117	101	113	99	109	96	94	106	97	103	95	93	98	93	91	89	89		
	7	124	104	120	102	117	100	98	120	103	116	101	113	99	98	109	99	107	97	96	101	96	94	92	92		
10	126	106	123	104	121	103	101	122	104	119	103	117	102	100	111	101	110	100	98	103	98	97	94	94			

配光曲線

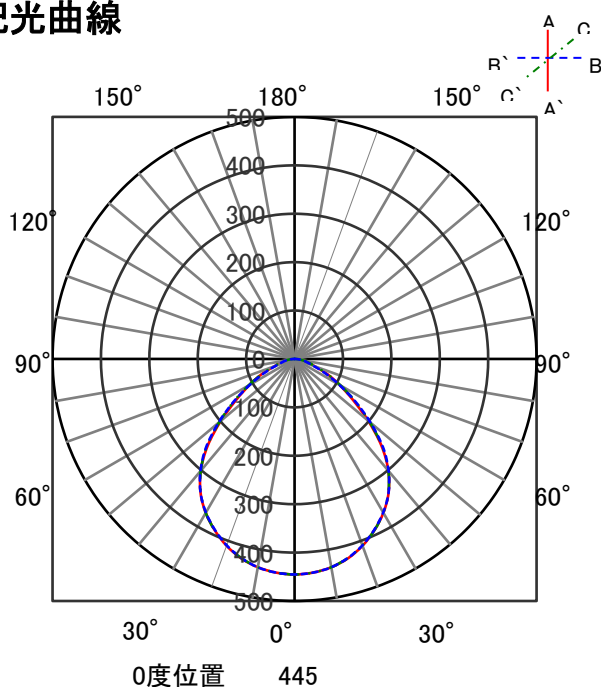


直射水平面照度

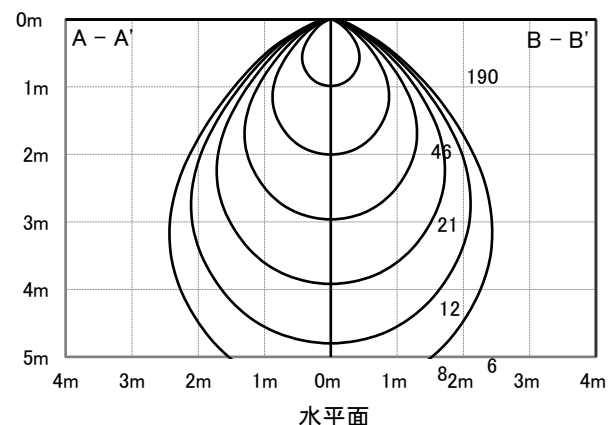

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-S190			良	0.67
光源品名	GX53口金LEDランプ			中	0.63
光源品番	LDF5N-H-GX53-D			否	0.56
器具光束	414 lm	最大取付間隔		器具効率	
光源	LED	AA	1.22H	上方向	0%
光源光束	510 lm	BB	1.22H	下方向	100%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率(%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	49	46	36	35	29	29	24	48	45	36	35	29	28	24	35	34	29	28	24	28	28	24	23	23	23	
	0.6	68	63	55	52	47	45	40	67	62	54	52	46	45	40	53	51	46	44	40	45	44	40	38	38	38	
	0.8	78	71	65	61	56	54	49	76	70	64	60	55	53	48	62	59	54	53	48	53	52	48	46	46	46	
	1	87	78	74	69	65	62	57	85	77	73	68	65	62	57	70	67	63	61	56	62	60	56	54	54	54	
	1.25	96	85	84	77	75	71	66	93	84	82	76	74	70	66	79	74	72	69	65	70	68	65	63	63	63	
	1.5	100	88	89	81	81	75	70	97	87	87	80	80	75	70	84	78	77	73	69	75	72	69	67	67	67	
	2	107	93	98	87	90	82	78	104	92	95	86	88	82	78	91	84	85	80	77	82	79	76	74	74	74	
	2.5	112	97	104	92	97	87	84	109	95	101	91	95	87	83	96	89	91	85	82	88	84	81	79	79	79	
	3	115	99	108	94	101	90	87	111	97	105	93	99	90	87	99	91	95	88	85	91	87	84	82	82	82	82
	4	119	101	113	98	108	95	92	115	100	109	97	105	94	91	103	95	100	92	90	95	90	88	86	86	86	86
	5	121	103	116	100	112	97	95	117	101	113	99	109	96	94	106	97	103	95	93	98	93	91	89	89	89	89
	7	124	104	120	102	117	100	98	120	103	116	101	113	99	98	109	99	107	97	96	101	96	94	92	92	92	92
10	126	106	123	104	121	103	101	122	104	119	103	117	102	100	111	101	110	100	98	103	98	97	94	94	94	94	

配光曲線

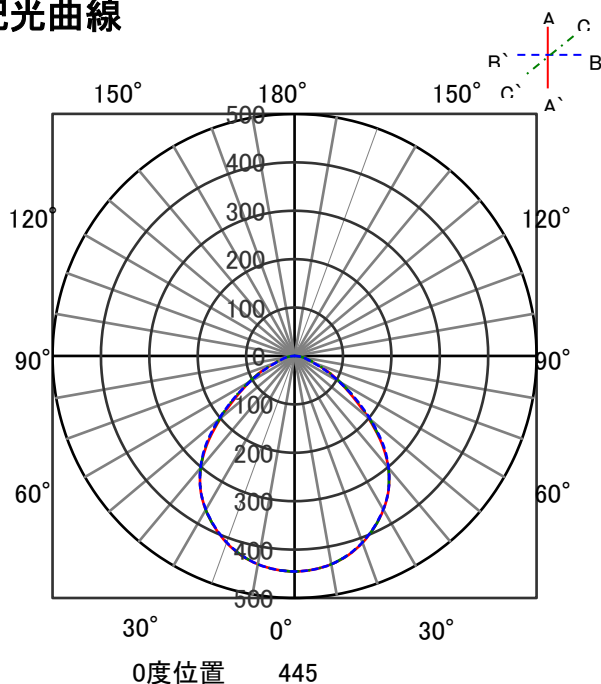


直射水平面照度

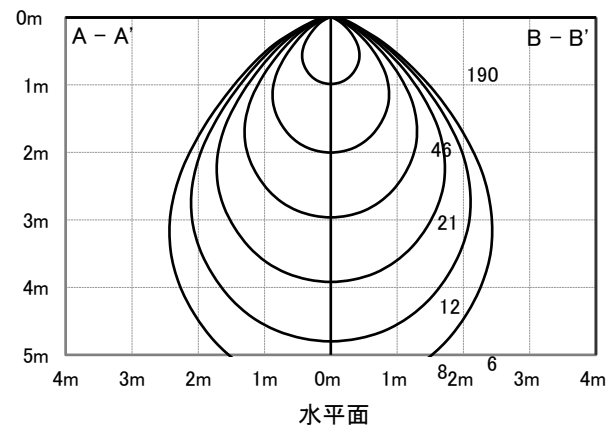

ECOHILUX照明器具 配光データシート


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-S190			良	0.67
光源品名	GX53口金LEDランプ			中	0.63
光源品番	LDF5WW-H-GX53-D			否	0.56
				器具効率	
器具光束	414 lm	最大取付間隔		上方向	0%
光源	LED	AA	1.22H	下方向	100%
光源光束	510 lm	BB	1.22H	全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	49	46	36	35	29	29	24	48	45	36	35	29	28	24	35	34	29	28	24	28	28	24	23			
	0.6	68	63	55	52	47	45	40	67	62	54	52	46	45	40	53	51	46	44	40	45	44	40	38			
	0.8	78	71	65	61	56	54	49	76	70	64	60	55	53	48	62	59	54	53	48	53	52	48	46			
	1	87	78	74	69	65	62	57	85	77	73	68	65	62	57	70	67	63	61	56	62	60	56	54			
	1.25	96	85	84	77	75	71	66	93	84	82	76	74	70	66	79	74	72	69	65	70	68	65	63			
	1.5	100	88	89	81	81	75	70	97	87	87	80	80	75	70	84	78	77	73	69	75	72	69	67			
	2	107	93	98	87	90	82	78	104	92	95	86	88	82	78	91	84	85	80	77	82	79	76	74			
	2.5	112	97	104	92	97	87	84	109	95	101	91	95	87	83	96	89	91	85	82	88	84	81	79			
	3	115	99	108	94	101	90	87	111	97	105	93	99	90	87	99	91	95	88	85	91	87	84	82			
	4	119	101	113	98	108	95	92	115	100	109	97	105	94	91	103	95	100	92	90	95	90	88	86			
	5	121	103	116	100	112	97	95	117	101	113	99	109	96	94	106	97	103	95	93	98	93	91	89			
	7	124	104	120	102	117	100	98	120	103	116	101	113	99	98	109	99	107	97	96	101	96	94	92			
10	126	106	123	104	121	103	101	122	104	119	103	117	102	100	111	101	110	100	98	103	98	97	94				

配光曲線

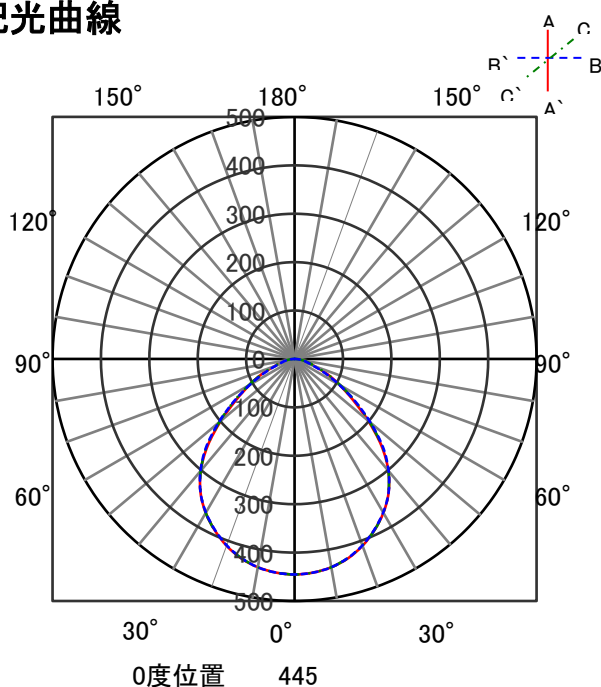


直射水平面照度

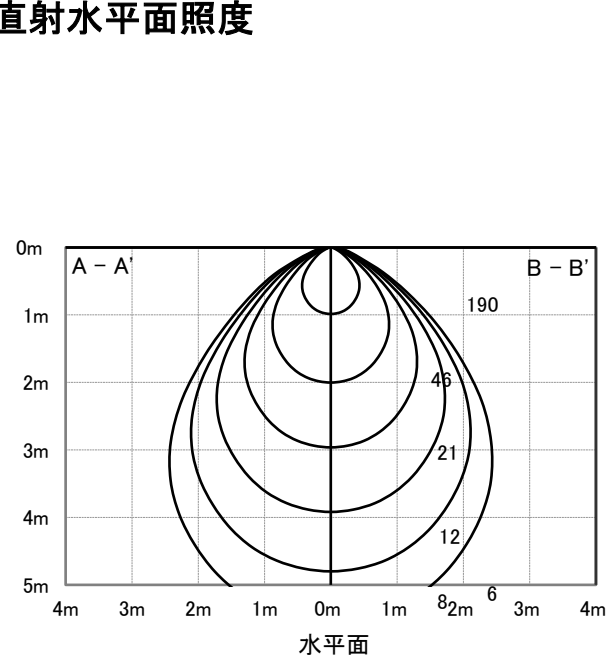

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-S190			良	0.67
光源品名	GX53口金LEDランプ			中	0.63
光源品番	LDF5L-H-GX53-D			否	0.56
器具光束	414 lm	最大取付間隔		器具効率	
光源	LED	AA	1.22H	上方向	0%
光源光束	510 lm	BB	1.22H	下方向	100%
				全方向	100%




照明率表

作業面照明率(×0.01)																												
反射率(%)	天井	80								70								50						30			0	
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0			
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	10	0	
室 指 数	0.4	49	46	36	35	29	29	24	48	45	36	35	29	28	24	35	34	29	28	24	28	28	24	23	23	23	23	
	0.6	68	63	55	52	47	45	40	67	62	54	52	46	45	40	53	51	46	44	40	45	44	40	38	38	38	38	
	0.8	78	71	65	61	56	54	49	76	70	64	60	55	53	48	62	59	54	53	48	53	52	48	46	46	46	46	
	1	87	78	74	69	65	62	57	85	77	73	68	65	62	57	70	67	63	61	56	62	60	56	54	54	54	54	
	1.25	96	85	84	77	75	71	66	93	84	82	76	74	70	66	79	74	72	69	65	70	68	65	63	63	63	63	
	1.5	100	88	89	81	81	75	70	97	87	87	80	80	75	70	84	78	77	73	69	75	72	69	67	67	67	67	
	2	107	93	98	87	90	82	78	104	92	95	86	88	82	78	91	84	85	80	77	82	79	76	74	74	74	74	
	2.5	112	97	104	92	97	87	84	109	95	101	91	95	87	83	96	89	91	85	82	88	84	81	79	79	79	79	
	3	115	99	108	94	101	90	87	111	97	105	93	99	90	87	99	91	95	88	85	91	87	84	82	82	82	82	
	4	119	101	113	98	108	95	92	115	100	109	97	105	94	91	103	95	100	92	90	95	90	88	86	86	86	86	86
	5	121	103	116	100	112	97	95	117	101	113	99	109	96	94	106	97	103	95	93	98	93	91	89	89	89	89	89
	7	124	104	120	102	117	100	98	120	103	116	101	113	99	98	109	99	107	97	96	101	96	94	92	92	92	92	92
10	126	106	123	104	121	103	101	122	104	119	103	117	102	100	111	101	110	100	98	103	98	97	94	94	94	94	94	

配光曲線

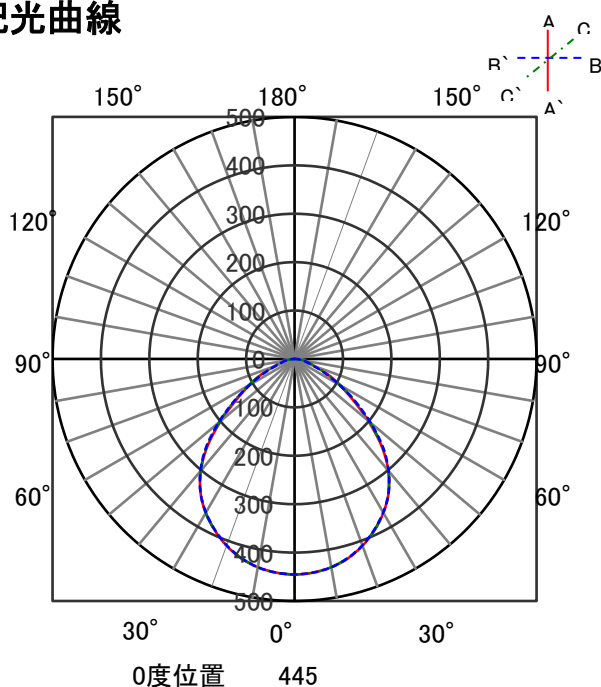


直射水平面照度

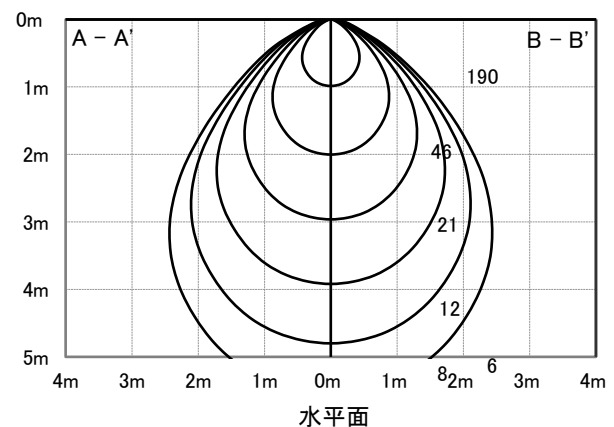

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-S190			良	0.67
光源品名	GX53口金LEDランプ			中	0.63
光源品番	LDF5N-H-GX53-HE140			否	0.56
器具光束	609 lm	最大取付間隔		器具効率	
光源	LED	AA	1.22H	上方向	0%
光源光束	750 lm	BB	1.22H	下方向	100%
				全方向	100%




照明率表

作業面照明率(×0.01)																								
反射率(%)	天井	80								70								50						0
	壁	70				50				30				10				50			30			0
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0
室 指 数	0.4	49	46	36	35	29	29	24	48	45	36	35	29	28	24	35	34	29	28	24	28	28	24	23
	0.6	68	63	55	52	47	45	40	67	62	54	52	46	45	40	53	51	46	44	40	45	44	40	38
	0.8	78	71	65	61	56	54	49	76	70	64	60	55	53	48	62	59	54	53	48	53	52	48	46
	1	87	78	74	69	65	62	57	85	77	73	68	65	62	57	70	67	63	61	56	62	60	56	54
	1.25	96	85	84	77	75	71	66	93	84	82	76	74	70	66	79	74	72	69	65	70	68	65	63
	1.5	100	88	89	81	81	75	70	97	87	87	80	80	75	70	84	78	77	73	69	75	72	69	67
	2	107	93	98	87	90	82	78	104	92	95	86	88	82	78	91	84	85	80	77	82	79	76	74
	2.5	112	97	104	92	97	87	84	109	95	101	91	95	87	83	96	89	91	85	82	88	84	81	79
	3	115	99	108	94	101	90	87	111	97	105	93	99	90	87	99	91	95	88	85	91	87	84	82
	4	119	101	113	98	108	95	92	115	100	109	97	105	94	91	103	95	100	92	90	95	90	88	86
	5	121	103	116	100	112	97	95	117	101	113	99	109	96	94	106	97	103	95	93	98	93	91	89
	7	124	104	120	102	117	100	98	120	103	116	101	113	99	98	109	99	107	97	96	101	96	94	92
	10	126	106	123	104	121	103	101	122	104	119	103	117	102	100	111	101	110	100	98	103	98	97	94

配光曲線

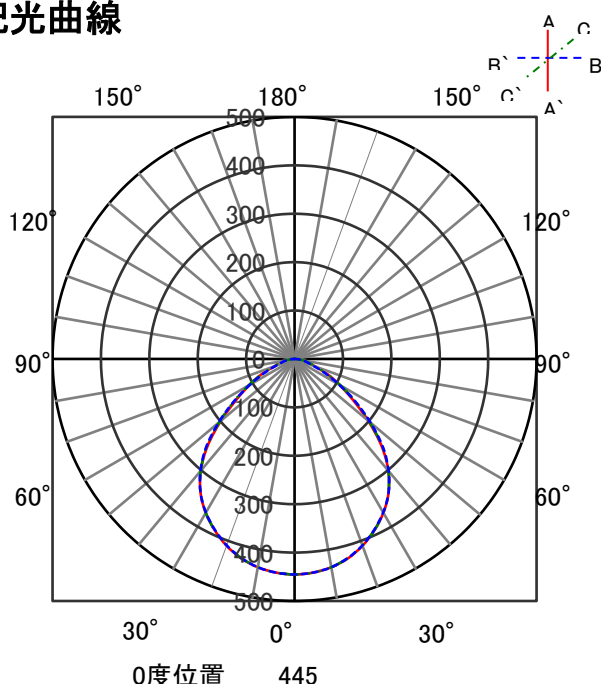


直射水平面照度

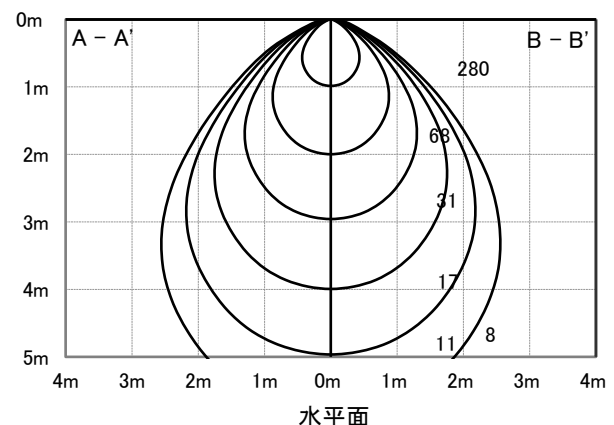

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-S190			良	0.67
光源品名	GX53口金LEDランプ			中	0.63
光源品番	LDF5WW-H-GX53-HE140			否	0.56
器具光束	609 lm	最大取付間隔		器具効率	
光源	LED	AA	1.22H	上方向	0%
光源光束	750 lm	BB	1.22H	下方向	100%
				全方向	100%




照明率表

作業面照明率(×0.01)																												
反射率 (%)	天井	80								70								50						30			0	
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0			
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	10	0	
室 指 数	0.4	49	46	36	35	29	29	24	48	45	36	35	29	28	24	35	34	29	28	24	28	28	24	23	23	23	23	
	0.6	68	63	55	52	47	45	40	67	62	54	52	46	45	40	53	51	46	44	40	45	44	40	38	38	38	38	
	0.8	78	71	65	61	56	54	49	76	70	64	60	55	53	48	62	59	54	53	48	53	52	48	46	46	46	46	
	1	87	78	74	69	65	62	57	85	77	73	68	65	62	57	70	67	63	61	56	62	60	56	54	54	54	54	
	1.25	96	85	84	77	75	71	66	93	84	82	76	74	70	66	79	74	72	69	65	70	68	65	63	63	63	63	
	1.5	100	88	89	81	81	75	70	97	87	87	80	80	75	70	84	78	77	73	69	75	72	69	67	67	67	67	
	2	107	93	98	87	90	82	78	104	92	95	86	88	82	78	91	84	85	80	77	82	79	76	74	74	74	74	
	2.5	112	97	104	92	97	87	84	109	95	101	91	95	87	83	96	89	91	85	82	88	84	81	79	79	79	79	
	3	115	99	108	94	101	90	87	111	97	105	93	99	90	87	99	91	95	88	85	91	87	84	82	82	82	82	
	4	119	101	113	98	108	95	92	115	100	109	97	105	94	91	103	95	100	92	90	95	90	88	86	86	86	86	86
	5	121	103	116	100	112	97	95	117	101	113	99	109	96	94	106	97	103	95	93	98	93	91	89	89	89	89	89
	7	124	104	120	102	117	100	98	120	103	116	101	113	99	98	109	99	107	97	96	101	96	94	92	92	92	92	92
10	126	106	123	104	121	103	101	122	104	119	103	117	102	100	111	101	110	100	98	103	98	97	94	94	94	94	94	

配光曲線

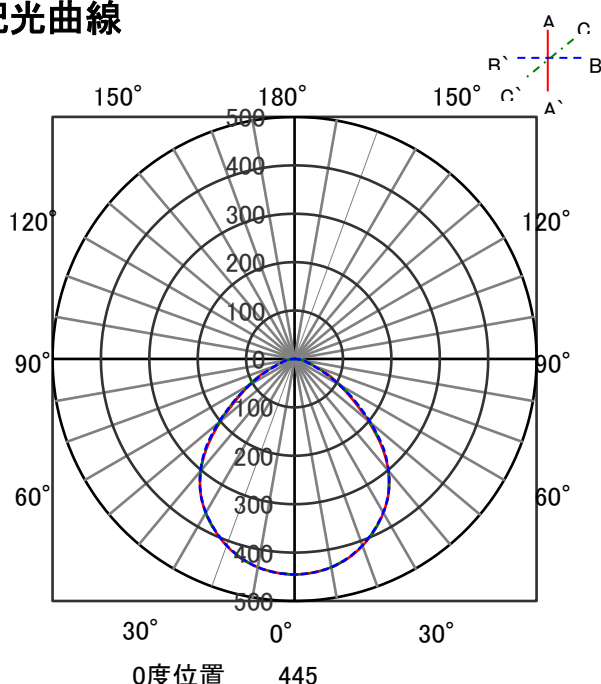


直射水平面照度

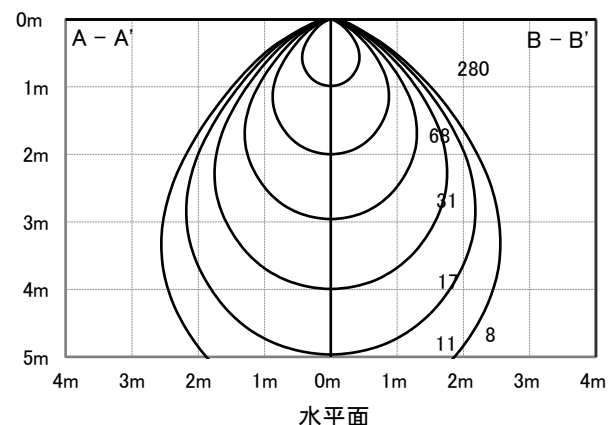

ECOHiLUX照明器具 配光データシート


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-S190			良	0.67
光源品名	GX53口金LEDランプ			中	0.63
光源品番	LDF5L-H-GX53-HE140			否	0.56
				器具効率	
器具光束	609 lm	最大取付間隔		上方向	0%
光源	LED	AA	1.22H	下方向	100%
光源光束	750 lm	BB	1.22H	全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	49	46	36	35	29	29	24	48	45	36	35	29	28	24	35	34	29	28	24	28	28	24	23			
	0.6	68	63	55	52	47	45	40	67	62	54	52	46	45	40	53	51	46	44	40	45	44	40	38			
	0.8	78	71	65	61	56	54	49	76	70	64	60	55	53	48	62	59	54	53	48	53	52	48	46			
	1	87	78	74	69	65	62	57	85	77	73	68	65	62	57	70	67	63	61	56	62	60	56	54			
	1.25	96	85	84	77	75	71	66	93	84	82	76	74	70	66	79	74	72	69	65	70	68	65	63			
	1.5	100	88	89	81	81	75	70	97	87	87	80	80	75	70	84	78	77	73	69	75	72	69	67			
	2	107	93	98	87	90	82	78	104	92	95	86	88	82	78	91	84	85	80	77	82	79	76	74			
	2.5	112	97	104	92	97	87	84	109	95	101	91	95	87	83	96	89	91	85	82	88	84	81	79			
	3	115	99	108	94	101	90	87	111	97	105	93	99	90	87	99	91	95	88	85	91	87	84	82			
	4	119	101	113	98	108	95	92	115	100	109	97	105	94	91	103	95	100	92	90	95	90	88	86			
	5	121	103	116	100	112	97	95	117	101	113	99	109	96	94	106	97	103	95	93	98	93	91	89			
	7	124	104	120	102	117	100	98	120	103	116	101	113	99	98	109	99	107	97	96	101	96	94	92			
10	126	106	123	104	121	103	101	122	104	119	103	117	102	100	111	101	110	100	98	103	98	97	94				

配光曲線

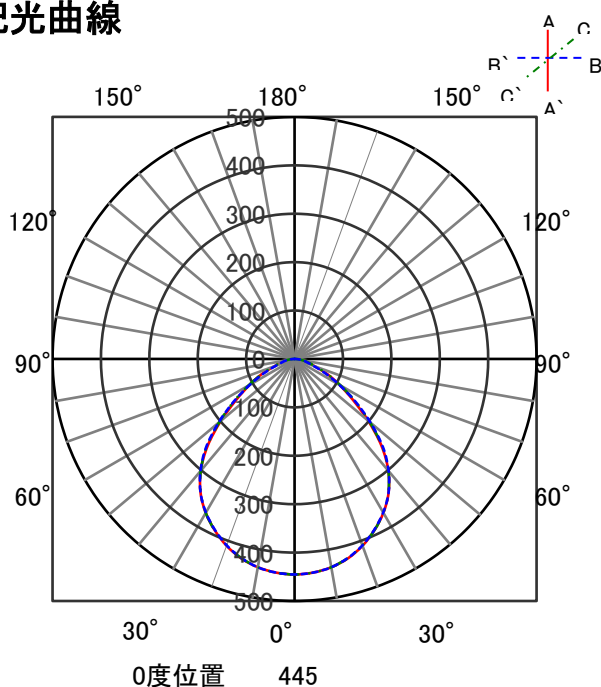


直射水平面照度

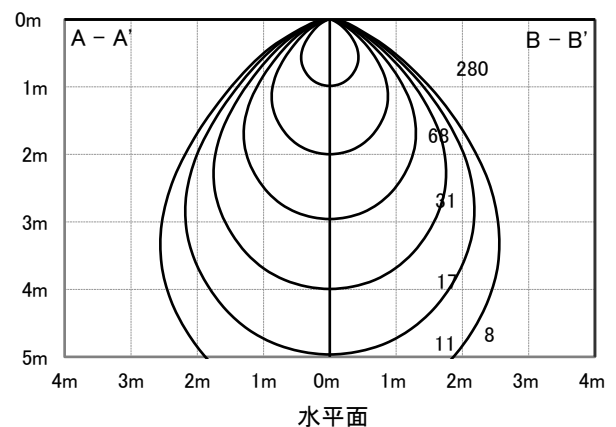

ECOHILUX照明器具 配光データシート


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-S190			良	0.67
光源品名	GX53口金LEDランプ			中	0.63
光源品番	LDF7N-H-GX53			否	0.56
				器具効率	
器具光束	609 lm	最大取付間隔		上方向	0%
光源	LED	AA	1.22H	下方向	100%
光源光束	750 lm	BB	1.22H	全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	49	46	36	35	29	29	24	48	45	36	35	29	28	24	35	34	29	28	24	28	28	24	23			
	0.6	68	63	55	52	47	45	40	67	62	54	52	46	45	40	53	51	46	44	40	45	44	40	38			
	0.8	78	71	65	61	56	54	49	76	70	64	60	55	53	48	62	59	54	53	48	53	52	48	46			
	1	87	78	74	69	65	62	57	85	77	73	68	65	62	57	70	67	63	61	56	62	60	56	54			
	1.25	96	85	84	77	75	71	66	93	84	82	76	74	70	66	79	74	72	69	65	70	68	65	63			
	1.5	100	88	89	81	81	75	70	97	87	87	80	80	75	70	84	78	77	73	69	75	72	69	67			
	2	107	93	98	87	90	82	78	104	92	95	86	88	82	78	91	84	85	80	77	82	79	76	74			
	2.5	112	97	104	92	97	87	84	109	95	101	91	95	87	83	96	89	91	85	82	88	84	81	79			
	3	115	99	108	94	101	90	87	111	97	105	93	99	90	87	99	91	95	88	85	91	87	84	82			
	4	119	101	113	98	108	95	92	115	100	109	97	105	94	91	103	95	100	92	90	95	90	88	86			
	5	121	103	116	100	112	97	95	117	101	113	99	109	96	94	106	97	103	95	93	98	93	91	89			
	7	124	104	120	102	117	100	98	120	103	116	101	113	99	98	109	99	107	97	96	101	96	94	92			
10	126	106	123	104	121	103	101	122	104	119	103	117	102	100	111	101	110	100	98	103	98	97	94				

配光曲線

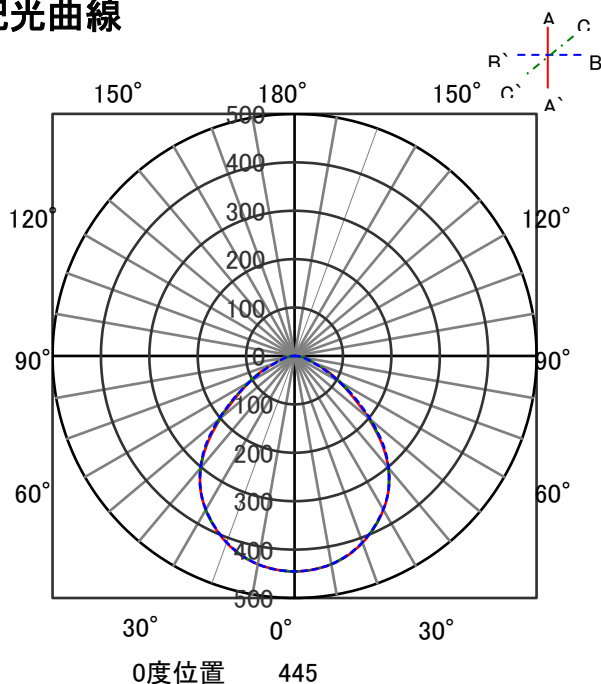


直射水平面照度

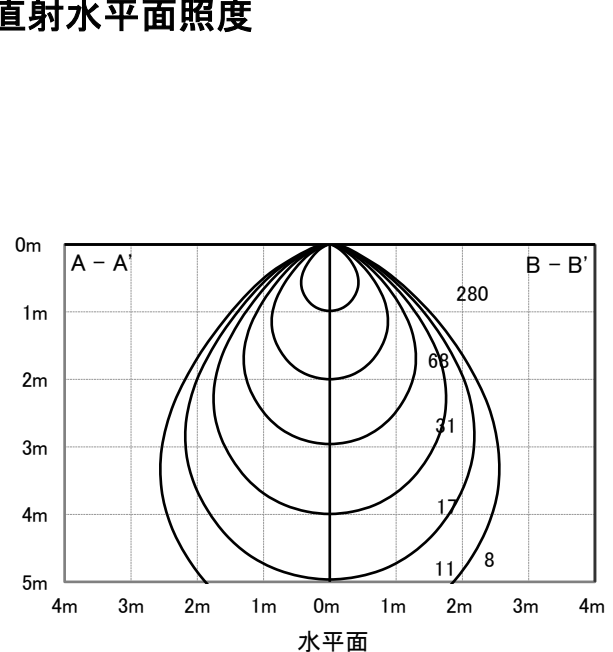

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-S190			良	0.67
光源品名	GX53口金LEDランプ			中	0.63
光源品番	LDF7WW-H-GX53			否	0.56
器具光束	609 lm	最大取付間隔		器具効率	
光源	LED	AA	1.22H	上方向	0%
光源光束	750 lm	BB	1.22H	下方向	100%
				全方向	100%




照明率表

作業面照明率(×0.01)																								
反射率(%)	天井	80								70								50						0
	壁	70				50				30				10				50			30			0
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0
室 指 数	0.4	49	46	36	35	29	29	24	48	45	36	35	29	28	24	35	34	29	28	24	28	28	24	23
	0.6	68	63	55	52	47	45	40	67	62	54	52	46	45	40	53	51	46	44	40	45	44	40	38
	0.8	78	71	65	61	56	54	49	76	70	64	60	55	53	48	62	59	54	53	48	53	52	48	46
	1	87	78	74	69	65	62	57	85	77	73	68	65	62	57	70	67	63	61	56	62	60	56	54
	1.25	96	85	84	77	75	71	66	93	84	82	76	74	70	66	79	74	72	69	65	70	68	65	63
	1.5	100	88	89	81	81	75	70	97	87	87	80	80	75	70	84	78	77	73	69	75	72	69	67
	2	107	93	98	87	90	82	78	104	92	95	86	88	82	78	91	84	85	80	77	82	79	76	74
	2.5	112	97	104	92	97	87	84	109	95	101	91	95	87	83	96	89	91	85	82	88	84	81	79
	3	115	99	108	94	101	90	87	111	97	105	93	99	90	87	99	91	95	88	85	91	87	84	82
	4	119	101	113	98	108	95	92	115	100	109	97	105	94	91	103	95	100	92	90	95	90	88	86
	5	121	103	116	100	112	97	95	117	101	113	99	109	96	94	106	97	103	95	93	98	93	91	89
	7	124	104	120	102	117	100	98	120	103	116	101	113	99	98	109	99	107	97	96	101	96	94	92
	10	126	106	123	104	121	103	101	122	104	119	103	117	102	100	111	101	110	100	98	103	98	97	94

配光曲線

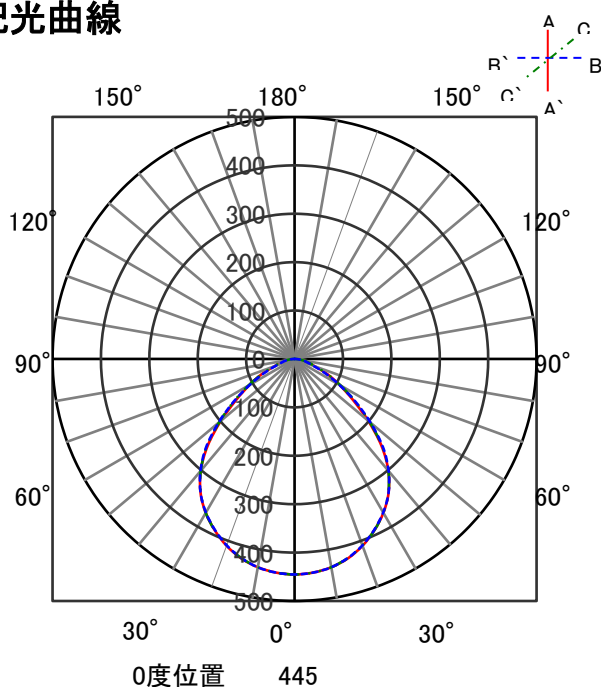


直射水平面照度

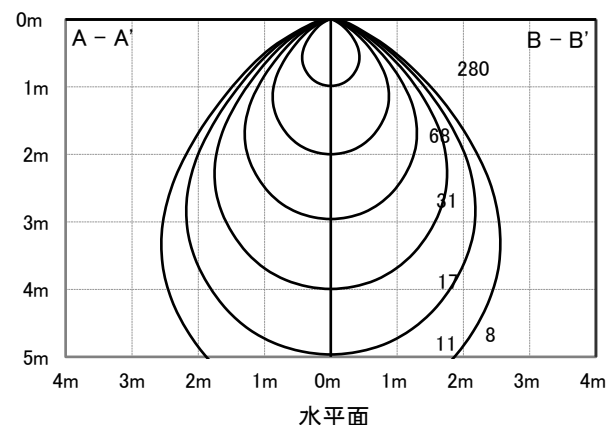

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-S190			良	0.67
光源品名	GX53口金LEDランプ			中	0.63
光源品番	LDF7L-H-GX53			否	0.56
器具光束	609 lm	最大取付間隔			器具効率
光源	LED	AA	1.22H	上方向	0%
光源光束	750 lm	BB	1.22H	下方向	100%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	49	46	36	35	29	29	24	48	45	36	35	29	28	24	35	34	29	28	24	28	28	24	23	23	23	
	0.6	68	63	55	52	47	45	40	67	62	54	52	46	45	40	53	51	46	44	40	45	44	40	38	38	38	
	0.8	78	71	65	61	56	54	49	76	70	64	60	55	53	48	62	59	54	53	48	53	52	48	46	46	46	
	1	87	78	74	69	65	62	57	85	77	73	68	65	62	57	70	67	63	61	56	62	60	56	54	54	54	
	1.25	96	85	84	77	75	71	66	93	84	82	76	74	70	66	79	74	72	69	65	70	68	65	63	63	63	
	1.5	100	88	89	81	81	75	70	97	87	87	80	80	75	70	84	78	77	73	69	75	72	69	67	67	67	
	2	107	93	98	87	90	82	78	104	92	95	86	88	82	78	91	84	85	80	77	82	79	76	74	74	74	
	2.5	112	97	104	92	97	87	84	109	95	101	91	95	87	83	96	89	91	85	82	88	84	81	79	79	79	
	3	115	99	108	94	101	90	87	111	97	105	93	99	90	87	99	91	95	88	85	91	87	84	82	82	82	82
	4	119	101	113	98	108	95	92	115	100	109	97	105	94	91	103	95	100	92	90	95	90	88	86	86	86	86
	5	121	103	116	100	112	97	95	117	101	113	99	109	96	94	106	97	103	95	93	98	93	91	89	89	89	89
	7	124	104	120	102	117	100	98	120	103	116	101	113	99	98	109	99	107	97	96	101	96	94	92	92	92	92
10	126	106	123	104	121	103	101	122	104	119	103	117	102	100	111	101	110	100	98	103	98	97	94	94	94	94	

配光曲線

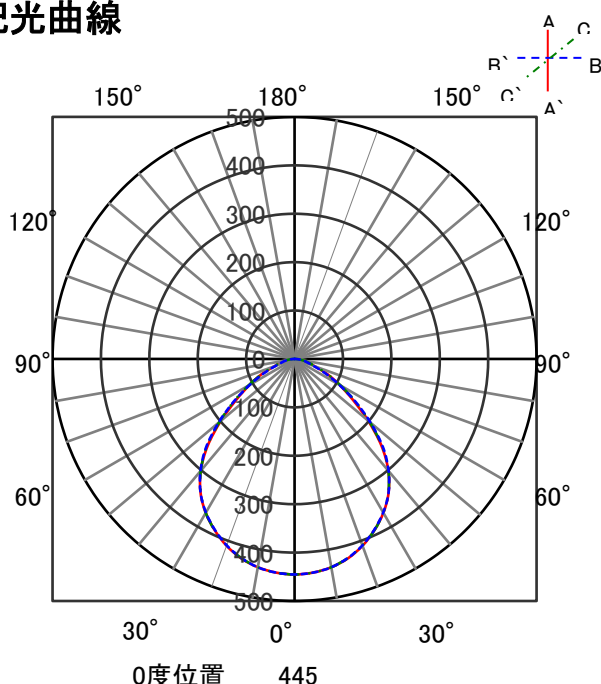


直射水平面照度

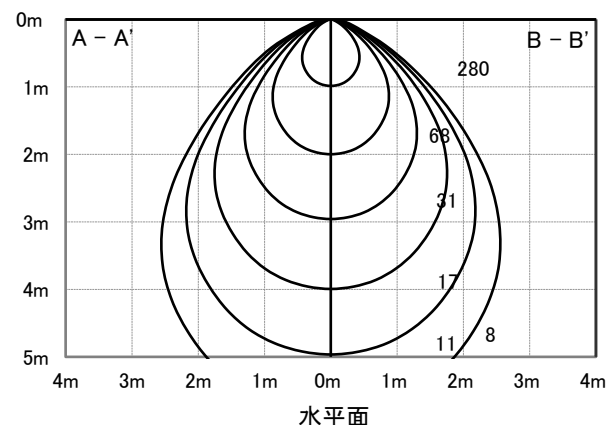

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-S190			良	0.67
光源品名	GX53口金LEDランプ			中	0.63
光源品番	LDF7N-H-GX53-D			否	0.56
器具光束	609 lm	最大取付間隔		器具効率	
光源	LED	AA	1.22H	上方向	0%
光源光束	750 lm	BB	1.22H	下方向	100%
				全方向	100%




照明率表

作業面照明率(×0.01)																								
反射率(%)	天井	80								70								50						0
	壁	70				50				30				10				50			30			0
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0
室 指 数	0.4	49	46	36	35	29	29	24	48	45	36	35	29	28	24	35	34	29	28	24	28	28	24	23
	0.6	68	63	55	52	47	45	40	67	62	54	52	46	45	40	53	51	46	44	40	45	44	40	38
	0.8	78	71	65	61	56	54	49	76	70	64	60	55	53	48	62	59	54	53	48	53	52	48	46
	1	87	78	74	69	65	62	57	85	77	73	68	65	62	57	70	67	63	61	56	62	60	56	54
	1.25	96	85	84	77	75	71	66	93	84	82	76	74	70	66	79	74	72	69	65	70	68	65	63
	1.5	100	88	89	81	81	75	70	97	87	87	80	80	75	70	84	78	77	73	69	75	72	69	67
	2	107	93	98	87	90	82	78	104	92	95	86	88	82	78	91	84	85	80	77	82	79	76	74
	2.5	112	97	104	92	97	87	84	109	95	101	91	95	87	83	96	89	91	85	82	88	84	81	79
	3	115	99	108	94	101	90	87	111	97	105	93	99	90	87	99	91	95	88	85	91	87	84	82
	4	119	101	113	98	108	95	92	115	100	109	97	105	94	91	103	95	100	92	90	95	90	88	86
	5	121	103	116	100	112	97	95	117	101	113	99	109	96	94	106	97	103	95	93	98	93	91	89
	7	124	104	120	102	117	100	98	120	103	116	101	113	99	98	109	99	107	97	96	101	96	94	92
	10	126	106	123	104	121	103	101	122	104	119	103	117	102	100	111	101	110	100	98	103	98	97	94

配光曲線

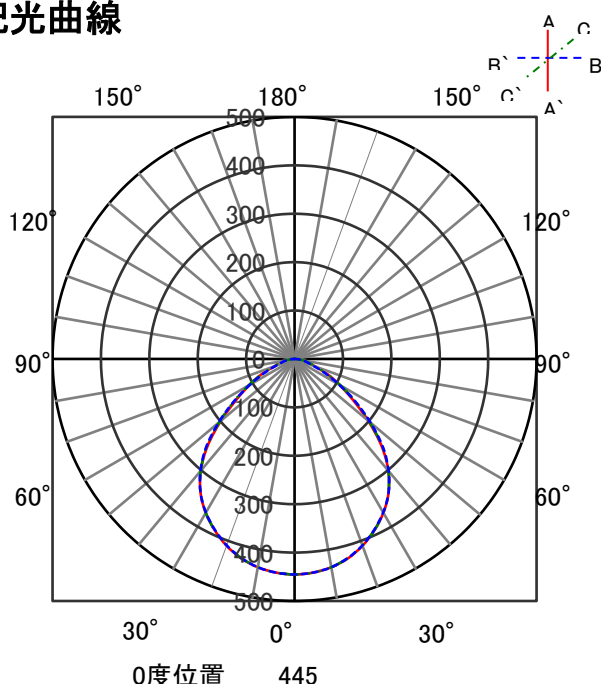


直射水平面照度

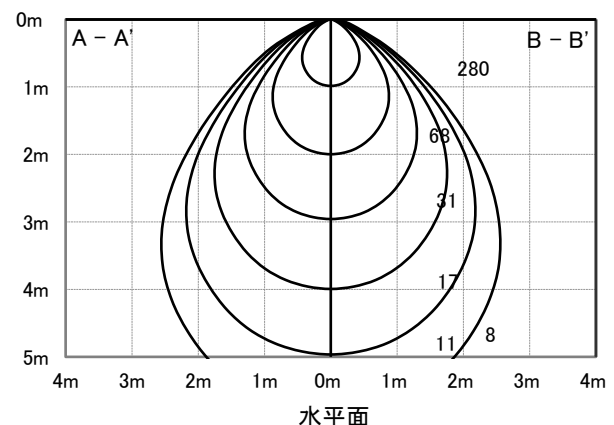

ECOHILUX照明器具 配光データシート


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-S190			良	0.67
光源品名	GX53口金LEDランプ			中	0.63
光源品番	LDF7WW-H-GX53-D			否	0.56
				器具効率	
器具光束	609 lm	最大取付間隔		上方向	0%
光源	LED	AA	1.22H	下方向	100%
光源光束	750 lm	BB	1.22H	全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	49	46	36	35	29	29	24	48	45	36	35	29	28	24	35	34	29	28	24	28	28	24	23			
	0.6	68	63	55	52	47	45	40	67	62	54	52	46	45	40	53	51	46	44	40	45	44	40	38			
	0.8	78	71	65	61	56	54	49	76	70	64	60	55	53	48	62	59	54	53	48	53	52	48	46			
	1	87	78	74	69	65	62	57	85	77	73	68	65	62	57	70	67	63	61	56	62	60	56	54			
	1.25	96	85	84	77	75	71	66	93	84	82	76	74	70	66	79	74	72	69	65	70	68	65	63			
	1.5	100	88	89	81	81	75	70	97	87	87	80	80	75	70	84	78	77	73	69	75	72	69	67			
	2	107	93	98	87	90	82	78	104	92	95	86	88	82	78	91	84	85	80	77	82	79	76	74			
	2.5	112	97	104	92	97	87	84	109	95	101	91	95	87	83	96	89	91	85	82	88	84	81	79			
	3	115	99	108	94	101	90	87	111	97	105	93	99	90	87	99	91	95	88	85	91	87	84	82			
	4	119	101	113	98	108	95	92	115	100	109	97	105	94	91	103	95	100	92	90	95	90	88	86			
	5	121	103	116	100	112	97	95	117	101	113	99	109	96	94	106	97	103	95	93	98	93	91	89			
	7	124	104	120	102	117	100	98	120	103	116	101	113	99	98	109	99	107	97	96	101	96	94	92			
10	126	106	123	104	121	103	101	122	104	119	103	117	102	100	111	101	110	100	98	103	98	97	94				

配光曲線

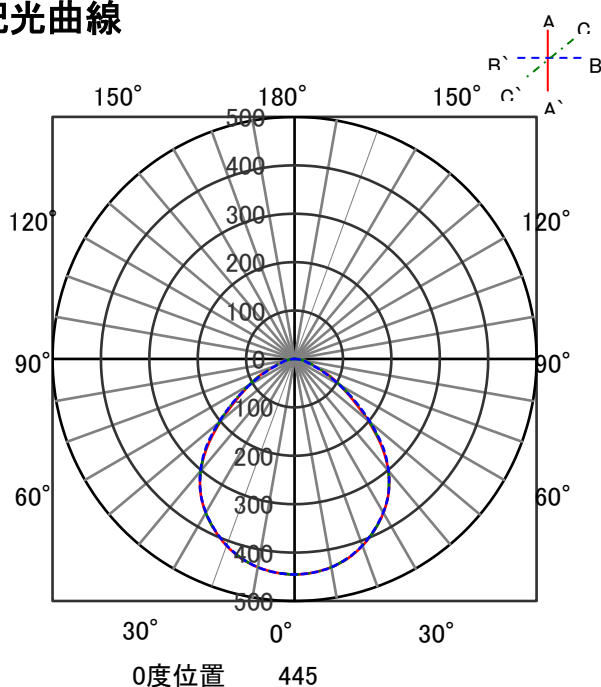


直射水平面照度

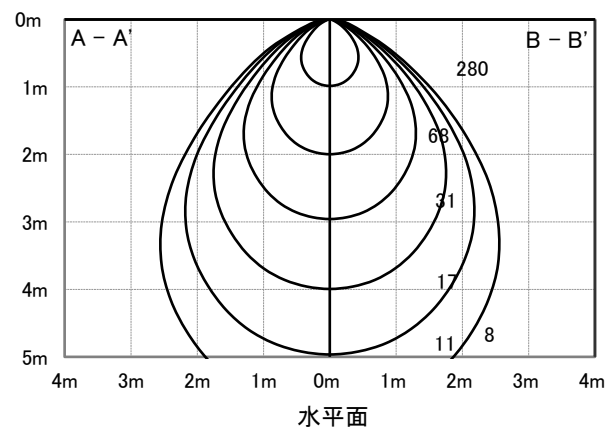

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-S190			良	0.67
光源品名	GX53口金LEDランプ			中	0.63
光源品番	LDF7L-H-GX53-D			否	0.56
器具光束	609 lm	最大取付間隔		器具効率	
光源	LED	AA	1.22H	上方向	0%
光源光束	750 lm	BB	1.22H	下方向	100%
				全方向	100%



照明率表

作業面照明率(×0.01)																								
反射率(%)	天井	80								70								50						0
	壁	70				50				30				10				50			30			0
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0
室 指 数	0.4	49	46	36	35	29	29	24	48	45	36	35	29	28	24	35	34	29	28	24	28	28	24	23
	0.6	68	63	55	52	47	45	40	67	62	54	52	46	45	40	53	51	46	44	40	45	44	40	38
	0.8	78	71	65	61	56	54	49	76	70	64	60	55	53	48	62	59	54	53	48	53	52	48	46
	1	87	78	74	69	65	62	57	85	77	73	68	65	62	57	70	67	63	61	56	62	60	56	54
	1.25	96	85	84	77	75	71	66	93	84	82	76	74	70	66	79	74	72	69	65	70	68	65	63
	1.5	100	88	89	81	81	75	70	97	87	87	80	80	75	70	84	78	77	73	69	75	72	69	67
	2	107	93	98	87	90	82	78	104	92	95	86	88	82	78	91	84	85	80	77	82	79	76	74
	2.5	112	97	104	92	97	87	84	109	95	101	91	95	87	83	96	89	91	85	82	88	84	81	79
	3	115	99	108	94	101	90	87	111	97	105	93	99	90	87	99	91	95	88	85	91	87	84	82
	4	119	101	113	98	108	95	92	115	100	109	97	105	94	91	103	95	100	92	90	95	90	88	86
	5	121	103	116	100	112	97	95	117	101	113	99	109	96	94	106	97	103	95	93	98	93	91	89
	7	124	104	120	102	117	100	98	120	103	116	101	113	99	98	109	99	107	97	96	101	96	94	92
	10	126	106	123	104	121	103	101	122	104	119	103	117	102	100	111	101	110	100	98	103	98	97	94

配光曲線

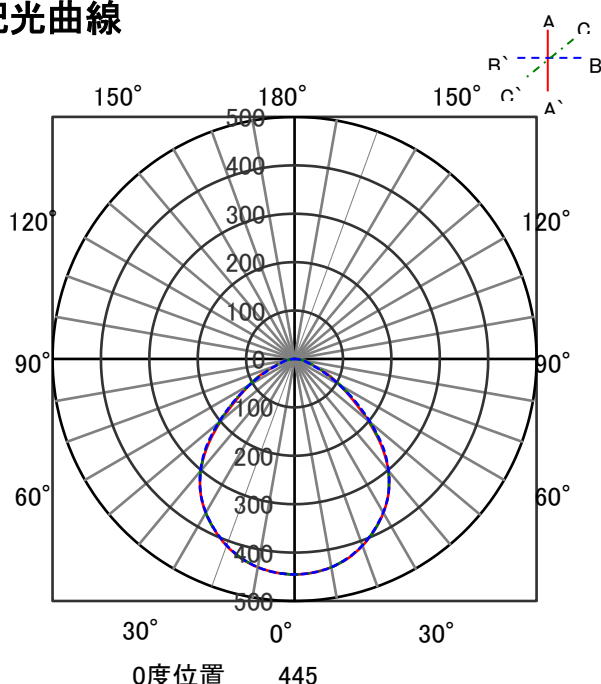

直射水平面照度

