


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-B190			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF3N-H-GX53-HE140			否	0.63
器具光束	389 lm	最大取付間隔		器具効率	
光源	LED	AA	1.32H	上方向	1%
光源光束	480 lm	BB	1.32H	下方向	99%
				全方向	100%




照明率表

作業面照明率(×0.01)																							
反射率(%)	天井	80								70								50					
	壁	70		50		30		10		70		50		30		10		50		30		10	
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30
室 指 数	0.4	43	40	29	28	21	21	16	42	39	28	28	21	21	16	27	27	21	20	16	20	16	14
	0.6	59	54	44	41	34	33	28	57	53	43	41	34	33	28	41	39	33	32	27	32	27	25
	0.8	69	63	53	50	43	41	35	66	61	52	49	42	41	35	50	47	41	40	34	40	39	34
	1	77	69	62	57	51	49	42	74	68	60	56	51	48	42	57	55	49	47	42	47	46	41
	1.25	85	76	71	65	60	57	50	82	74	69	64	59	56	50	66	62	57	55	49	55	54	49
	1.5	91	80	77	70	66	62	55	87	78	75	69	65	61	55	71	66	63	60	54	60	58	54
	2	99	86	86	77	77	70	64	95	84	84	76	75	69	63	79	73	72	67	62	68	66	61
	2.5	104	90	93	82	84	76	70	100	88	90	81	82	75	70	85	78	78	73	69	75	72	68
	3	108	93	98	86	90	80	75	104	91	95	84	87	79	74	89	82	83	77	73	79	75	72
	4	113	96	105	91	97	86	81	108	94	101	89	94	84	80	94	86	89	82	79	84	80	77
	5	116	98	109	94	103	89	85	111	96	105	92	99	88	85	98	89	94	86	83	88	84	81
	7	120	101	114	97	109	94	91	115	99	110	96	106	93	90	103	93	99	90	88	93	88	86
	10	123	103	119	100	115	98	95	118	101	114	99	111	96	94	106	96	104	94	92	97	92	90

配光曲線

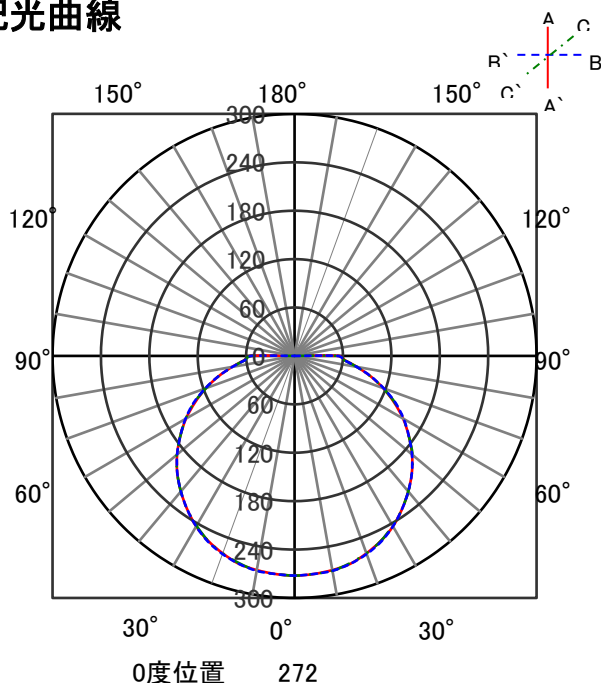


直射水平面照度

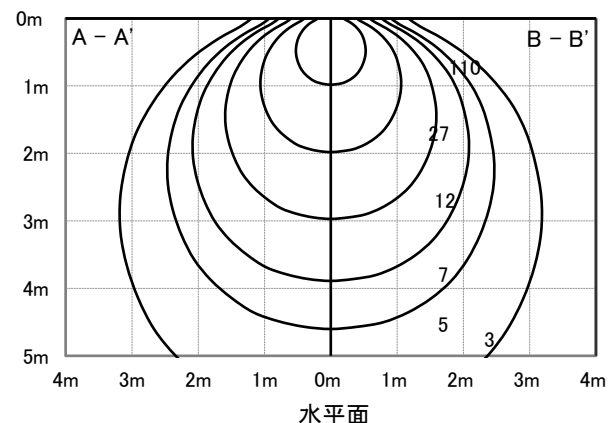

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-B190			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF3WW-H-GX53-HE140			否	0.63
器具光束	389 lm	最大取付間隔		器具効率	
光源	LED	AA	1.32H	上方向	1%
光源光束	480 lm	BB	1.32H	下方向	99%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	43	40	29	28	21	21	16	42	39	28	28	21	21	16	27	27	21	20	16	20	20	16	14			
	0.6	59	54	44	41	34	33	28	57	53	43	41	34	33	28	41	39	33	32	27	32	32	27	25			
	0.8	69	63	53	50	43	41	35	66	61	52	49	42	41	35	50	47	41	40	34	40	39	34	32			
	1	77	69	62	57	51	49	42	74	68	60	56	51	48	42	57	55	49	47	42	47	46	41	39			
	1.25	85	76	71	65	60	57	50	82	74	69	64	59	56	50	66	62	57	55	49	55	54	49	46			
	1.5	91	80	77	70	66	62	55	87	78	75	69	65	61	55	71	66	63	60	54	60	58	54	51			
	2	99	86	86	77	77	70	64	95	84	84	76	75	69	63	79	73	72	67	62	68	66	61	59			
	2.5	104	90	93	82	84	76	70	100	88	90	81	82	75	70	85	78	78	73	69	75	72	68	64			
	3	108	93	98	86	90	80	75	104	91	95	84	87	79	74	89	82	83	77	73	79	75	72	68			
	4	113	96	105	91	97	86	81	108	94	101	89	94	84	80	94	86	89	82	79	84	80	77	74			
	5	116	98	109	94	103	89	85	111	96	105	92	99	88	85	98	89	94	86	83	88	84	81	78			
	7	120	101	114	97	109	94	91	115	99	110	96	106	93	90	103	93	99	90	88	93	88	86	83			
10	123	103	119	100	115	98	95	118	101	114	99	111	96	94	106	96	104	94	92	97	92	90	87				

配光曲線

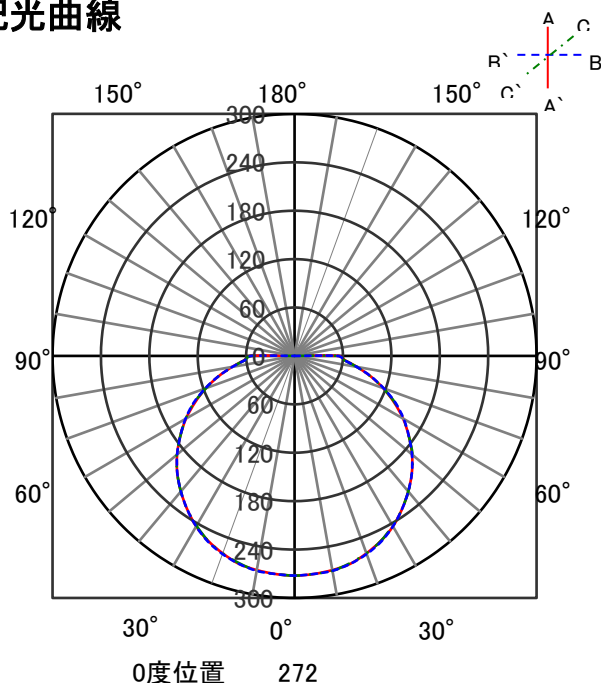


直射水平面照度

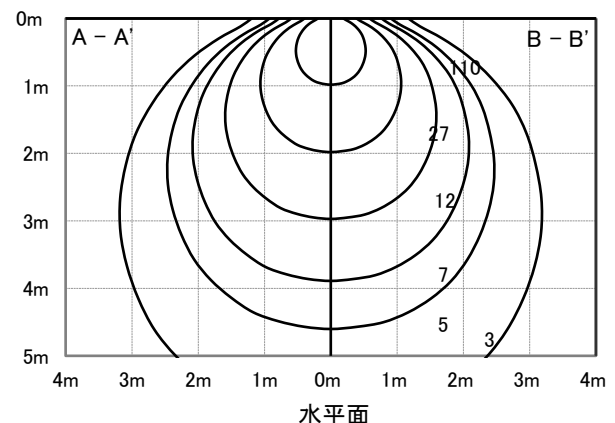

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-B190			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF3L-H-GX53-HE140			否	0.63
器具光束	389 lm	最大取付間隔		器具効率	
光源	LED	AA	1.32H	上方向	1%
光源光束	480 lm	BB	1.32H	下方向	99%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	0		
室 指 数	0.4	43	40	29	28	21	21	16	42	39	28	28	21	21	16	27	27	21	20	16	20	20	16	14			
	0.6	59	54	44	41	34	33	28	57	53	43	41	34	33	28	41	39	33	32	27	32	32	27	25			
	0.8	69	63	53	50	43	41	35	66	61	52	49	42	41	35	50	47	41	40	34	40	39	34	32			
	1	77	69	62	57	51	49	42	74	68	60	56	51	48	42	57	55	49	47	42	47	46	41	39			
	1.25	85	76	71	65	60	57	50	82	74	69	64	59	56	50	66	62	57	55	49	55	54	49	46			
	1.5	91	80	77	70	66	62	55	87	78	75	69	65	61	55	71	66	63	60	54	60	58	54	51			
	2	99	86	86	77	77	70	64	95	84	84	76	75	69	63	79	73	72	67	62	68	66	61	59			
	2.5	104	90	93	82	84	76	70	100	88	90	81	82	75	70	85	78	78	73	69	75	72	68	64			
	3	108	93	98	86	90	80	75	104	91	95	84	87	79	74	89	82	83	77	73	79	75	72	68			
	4	113	96	105	91	97	86	81	108	94	101	89	94	84	80	94	86	89	82	79	84	80	77	74			
	5	116	98	109	94	103	89	85	111	96	105	92	99	88	85	98	89	94	86	83	88	84	81	78			
	7	120	101	114	97	109	94	91	115	99	110	96	106	93	90	103	93	99	90	88	93	88	86	83			
10	123	103	119	100	115	98	95	118	101	114	99	111	96	94	106	96	104	94	92	97	92	90	87				

配光曲線

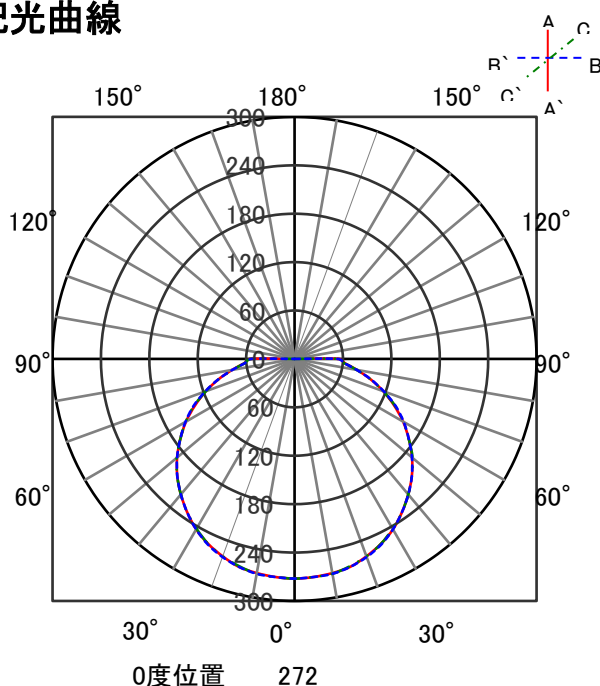


直射水平面照度

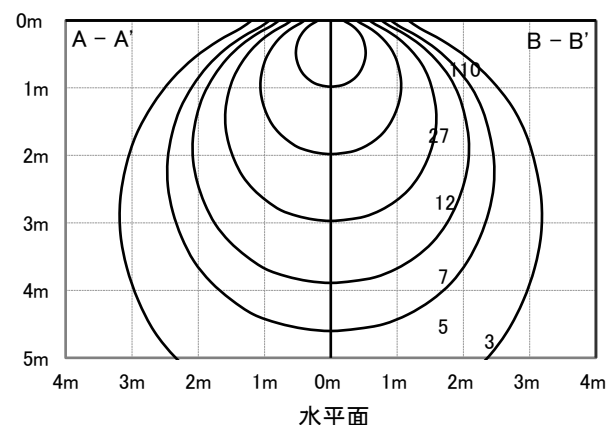

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-B190			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5N-H-GX53			否	0.63
器具光束	414 lm	最大取付間隔		器具効率	
光源	LED	AA	1.32H	上方向	1%
光源光束	510 lm	BB	1.32H	下方向	99%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	43	40	29	28	21	21	16	42	39	28	28	21	21	16	27	27	21	20	16	20	20	16	14			
	0.6	59	54	44	41	34	33	28	57	53	43	41	34	33	28	41	39	33	32	27	32	32	27	25			
	0.8	69	63	53	50	43	41	35	66	61	52	49	42	41	35	50	47	41	40	34	40	39	34	32			
	1	77	69	62	57	51	49	42	74	68	60	56	51	48	42	57	55	49	47	42	47	46	41	39			
	1.25	85	76	71	65	60	57	50	82	74	69	64	59	56	50	66	62	57	55	49	55	54	49	46			
	1.5	91	80	77	70	66	62	55	87	78	75	69	65	61	55	71	66	63	60	54	60	58	54	51			
	2	99	86	86	77	77	70	64	95	84	84	76	75	69	63	79	73	72	67	62	68	66	61	59			
	2.5	104	90	93	82	84	76	70	100	88	90	81	82	75	70	85	78	78	73	69	75	72	68	64			
	3	108	93	98	86	90	80	75	104	91	95	84	87	79	74	89	82	83	77	73	79	75	72	68			
	4	113	96	105	91	97	86	81	108	94	101	89	94	84	80	94	86	89	82	79	84	80	77	74			
	5	116	98	109	94	103	89	85	111	96	105	92	99	88	85	98	89	94	86	83	88	84	81	78			
	7	120	101	114	97	109	94	91	115	99	110	96	106	93	90	103	93	99	90	88	93	88	86	83			
10	123	103	119	100	115	98	95	118	101	114	99	111	96	94	106	96	104	94	92	97	92	90	87				

配光曲線

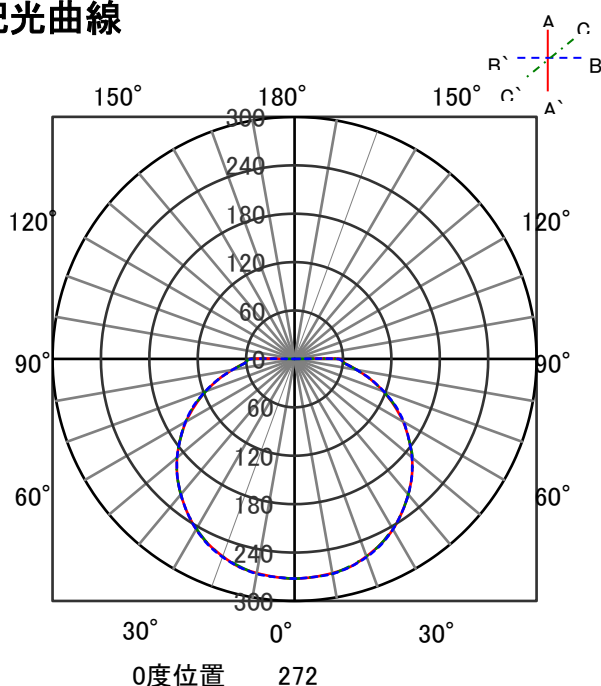


直射水平面照度

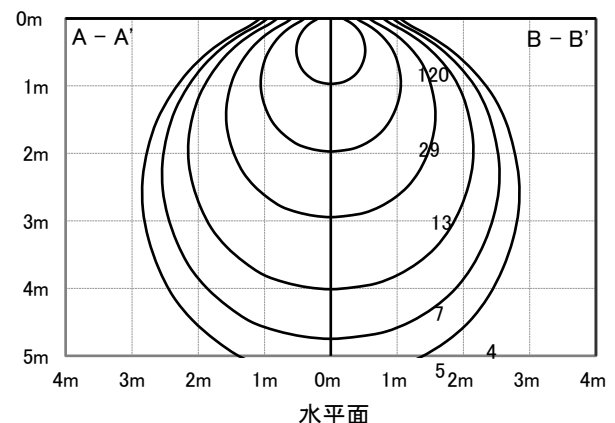

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-B190			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5L-H-GX53			否	0.63
器具光束	414 lm	最大取付間隔		器具効率	
光源	LED	AA	1.32H	上方向	1%
光源光束	510 lm	BB	1.32H	下方向	99%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	43	40	29	28	21	21	16	42	39	28	28	21	21	16	27	27	21	20	16	20	20	16	14			
	0.6	59	54	44	41	34	33	28	57	53	43	41	34	33	28	41	39	33	32	27	32	32	27	25			
	0.8	69	63	53	50	43	41	35	66	61	52	49	42	41	35	50	47	41	40	34	40	39	34	32			
	1	77	69	62	57	51	49	42	74	68	60	56	51	48	42	57	55	49	47	42	47	46	41	39			
	1.25	85	76	71	65	60	57	50	82	74	69	64	59	56	50	66	62	57	55	49	55	54	49	46			
	1.5	91	80	77	70	66	62	55	87	78	75	69	65	61	55	71	66	63	60	54	60	58	54	51			
	2	99	86	86	77	77	70	64	95	84	84	76	75	69	63	79	73	72	67	62	68	66	61	59			
	2.5	104	90	93	82	84	76	70	100	88	90	81	82	75	70	85	78	78	73	69	75	72	68	64			
	3	108	93	98	86	90	80	75	104	91	95	84	87	79	74	89	82	83	77	73	79	75	72	68			
	4	113	96	105	91	97	86	81	108	94	101	89	94	84	80	94	86	89	82	79	84	80	77	74			
	5	116	98	109	94	103	89	85	111	96	105	92	99	88	85	98	89	94	86	83	88	84	81	78			
	7	120	101	114	97	109	94	91	115	99	110	96	106	93	90	103	93	99	90	88	93	88	86	83			
10	123	103	119	100	115	98	95	118	101	114	99	111	96	94	106	96	104	94	92	97	92	90	87				

配光曲線

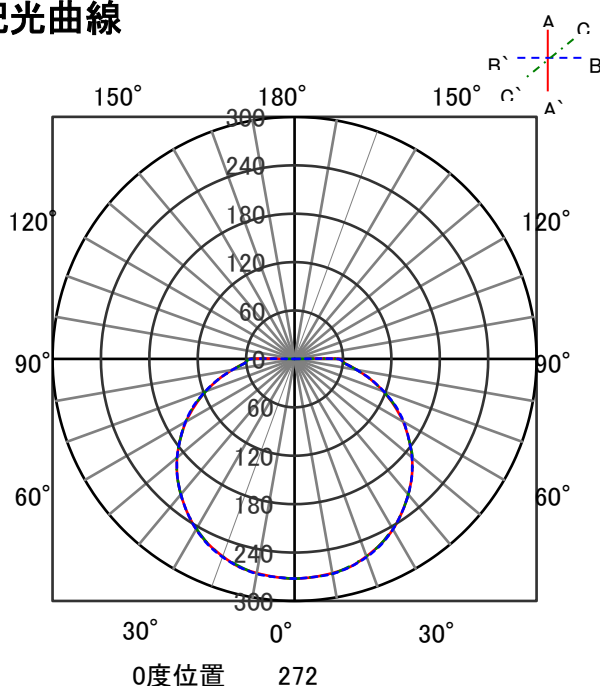


直射水平面照度

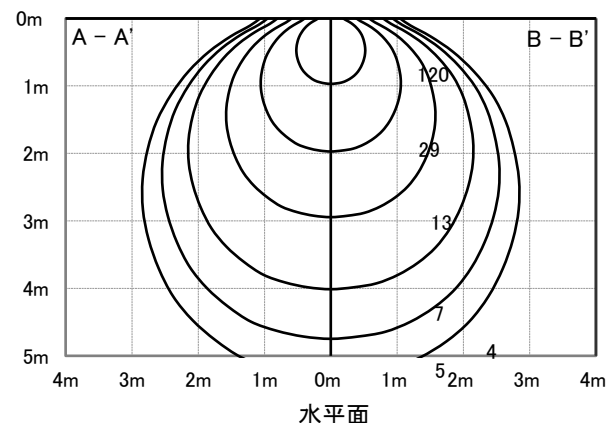

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-B190			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5WW-H-GX53			否	0.63
器具光束	414 lm	最大取付間隔			器具効率
光源	LED	AA	1.32H	上方向	1%
光源光束	510 lm	BB	1.32H	下方向	99%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0			
室 指 数	0.4	43	40	29	28	21	21	16	42	39	28	28	21	21	16	27	27	21	20	16	20	20	16	14			
	0.6	59	54	44	41	34	33	28	57	53	43	41	34	33	28	41	39	33	32	27	32	32	27	25			
	0.8	69	63	53	50	43	41	35	66	61	52	49	42	41	35	50	47	41	40	34	40	39	34	32			
	1	77	69	62	57	51	49	42	74	68	60	56	51	48	42	57	55	49	47	42	47	46	41	39			
	1.25	85	76	71	65	60	57	50	82	74	69	64	59	56	50	66	62	57	55	49	55	54	49	46			
	1.5	91	80	77	70	66	62	55	87	78	75	69	65	61	55	71	66	63	60	54	60	58	54	51			
	2	99	86	86	77	77	70	64	95	84	84	76	75	69	63	79	73	72	67	62	68	66	61	59			
	2.5	104	90	93	82	84	76	70	100	88	90	81	82	75	70	85	78	78	73	69	75	72	68	64			
	3	108	93	98	86	90	80	75	104	91	95	84	87	79	74	89	82	83	77	73	79	75	72	68			
	4	113	96	105	91	97	86	81	108	94	101	89	94	84	80	94	86	89	82	79	84	80	77	74			
	5	116	98	109	94	103	89	85	111	96	105	92	99	88	85	98	89	94	86	83	88	84	81	78			
	7	120	101	114	97	109	94	91	115	99	110	96	106	93	90	103	93	99	90	88	93	88	86	83			
10	123	103	119	100	115	98	95	118	101	114	99	111	96	94	106	96	104	94	92	97	92	90	87				

配光曲線

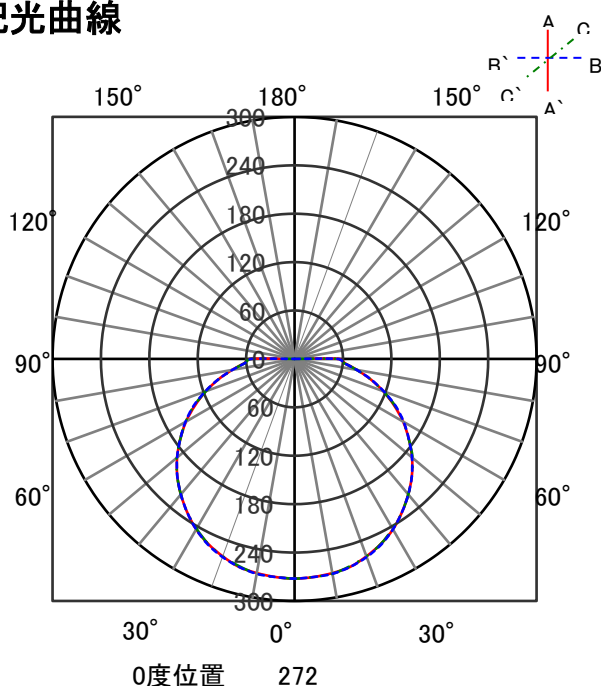


直射水平面照度

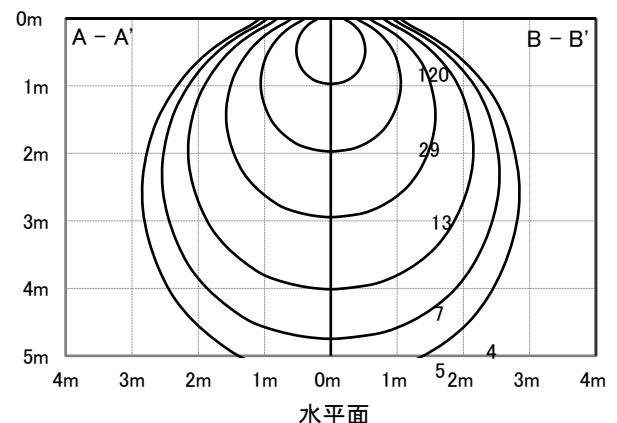

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-B190			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5N-H-GX53-D			否	0.63
器具光束	414 lm	最大取付間隔		器具効率	
光源	LED	AA	1.32H	上方向	1%
光源光束	510 lm	BB	1.32H	下方向	99%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	43	40	29	28	21	21	16	42	39	28	28	21	21	16	27	27	21	20	16	20	20	16	14			
	0.6	59	54	44	41	34	33	28	57	53	43	41	34	33	28	41	39	33	32	27	32	32	27	25			
	0.8	69	63	53	50	43	41	35	66	61	52	49	42	41	35	50	47	41	40	34	40	39	34	32			
	1	77	69	62	57	51	49	42	74	68	60	56	51	48	42	57	55	49	47	42	47	46	41	39			
	1.25	85	76	71	65	60	57	50	82	74	69	64	59	56	50	66	62	57	55	49	55	54	49	46			
	1.5	91	80	77	70	66	62	55	87	78	75	69	65	61	55	71	66	63	60	54	60	58	54	51			
	2	99	86	86	77	77	70	64	95	84	84	76	75	69	63	79	73	72	67	62	68	66	61	59			
	2.5	104	90	93	82	84	76	70	100	88	90	81	82	75	70	85	78	78	73	69	75	72	68	64			
	3	108	93	98	86	90	80	75	104	91	95	84	87	79	74	89	82	83	77	73	79	75	72	68			
	4	113	96	105	91	97	86	81	108	94	101	89	94	84	80	94	86	89	82	79	84	80	77	74			
	5	116	98	109	94	103	89	85	111	96	105	92	99	88	85	98	89	94	86	83	88	84	81	78			
	7	120	101	114	97	109	94	91	115	99	110	96	106	93	90	103	93	99	90	88	93	88	86	83			
10	123	103	119	100	115	98	95	118	101	114	99	111	96	94	106	96	104	94	92	97	92	90	87				

配光曲線

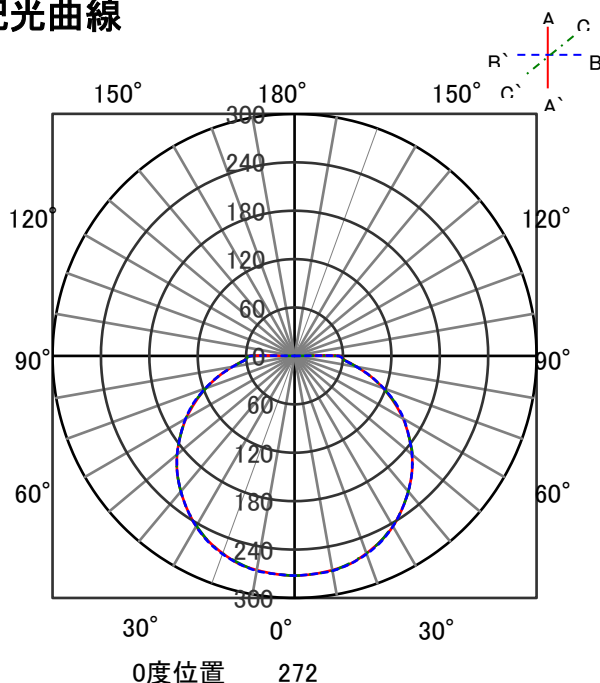


直射水平面照度

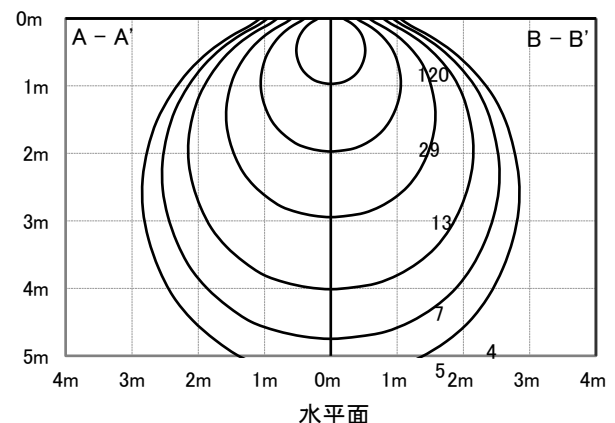

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-B190			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5WW-H-GX53-D			否	0.63
器具光束	414 lm	最大取付間隔		器具効率	
光源	LED	AA	1.32H	上方向	1%
光源光束	510 lm	BB	1.32H	下方向	99%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	43	40	29	28	21	21	16	42	39	28	28	21	21	16	27	27	21	20	16	20	20	16	14			
	0.6	59	54	44	41	34	33	28	57	53	43	41	34	33	28	41	39	33	32	27	32	32	27	25			
	0.8	69	63	53	50	43	41	35	66	61	52	49	42	41	35	50	47	41	40	34	40	39	34	32			
	1	77	69	62	57	51	49	42	74	68	60	56	51	48	42	57	55	49	47	42	47	46	41	39			
	1.25	85	76	71	65	60	57	50	82	74	69	64	59	56	50	66	62	57	55	49	55	54	49	46			
	1.5	91	80	77	70	66	62	55	87	78	75	69	65	61	55	71	66	63	60	54	60	58	54	51			
	2	99	86	86	77	77	70	64	95	84	84	76	75	69	63	79	73	72	67	62	68	66	61	59			
	2.5	104	90	93	82	84	76	70	100	88	90	81	82	75	70	85	78	78	73	69	75	72	68	64			
	3	108	93	98	86	90	80	75	104	91	95	84	87	79	74	89	82	83	77	73	79	75	72	68			
	4	113	96	105	91	97	86	81	108	94	101	89	94	84	80	94	86	89	82	79	84	80	77	74			
	5	116	98	109	94	103	89	85	111	96	105	92	99	88	85	98	89	94	86	83	88	84	81	78			
	7	120	101	114	97	109	94	91	115	99	110	96	106	93	90	103	93	99	90	88	93	88	86	83			
10	123	103	119	100	115	98	95	118	101	114	99	111	96	94	106	96	104	94	92	97	92	90	87				

配光曲線

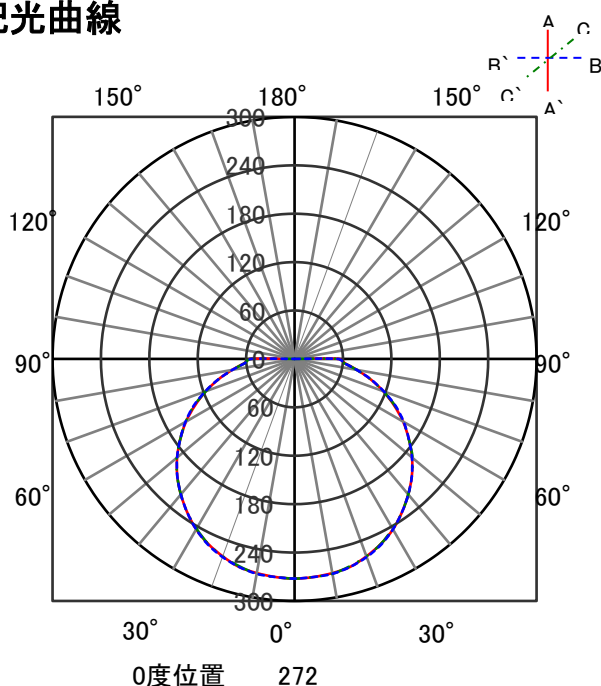


直射水平面照度

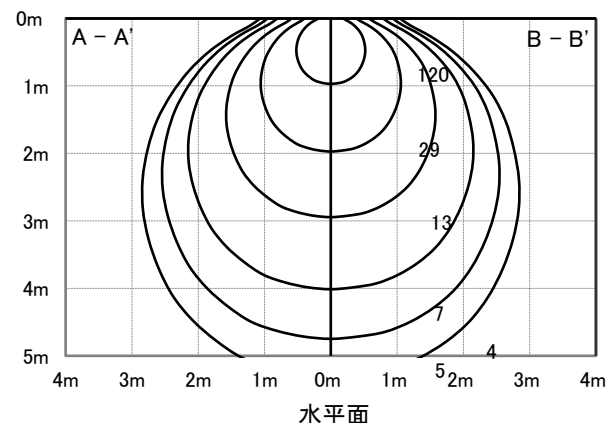

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-B190			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5L-H-GX53-D			否	0.63
器具光束	414 lm	最大取付間隔		器具効率	
光源	LED	AA	1.32H	上方向	1%
光源光束	510 lm	BB	1.32H	下方向	99%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	43	40	29	28	21	21	16	42	39	28	28	21	21	16	27	27	21	20	16	20	20	16	14			
	0.6	59	54	44	41	34	33	28	57	53	43	41	34	33	28	41	39	33	32	27	32	32	27	25			
	0.8	69	63	53	50	43	41	35	66	61	52	49	42	41	35	50	47	41	40	34	40	39	34	32			
	1	77	69	62	57	51	49	42	74	68	60	56	51	48	42	57	55	49	47	42	47	46	41	39			
	1.25	85	76	71	65	60	57	50	82	74	69	64	59	56	50	66	62	57	55	49	55	54	49	46			
	1.5	91	80	77	70	66	62	55	87	78	75	69	65	61	55	71	66	63	60	54	60	58	54	51			
	2	99	86	86	77	77	70	64	95	84	84	76	75	69	63	79	73	72	67	62	68	66	61	59			
	2.5	104	90	93	82	84	76	70	100	88	90	81	82	75	70	85	78	78	73	69	75	72	68	64			
	3	108	93	98	86	90	80	75	104	91	95	84	87	79	74	89	82	83	77	73	79	75	72	68			
	4	113	96	105	91	97	86	81	108	94	101	89	94	84	80	94	86	89	82	79	84	80	77	74			
	5	116	98	109	94	103	89	85	111	96	105	92	99	88	85	98	89	94	86	83	88	84	81	78			
	7	120	101	114	97	109	94	91	115	99	110	96	106	93	90	103	93	99	90	88	93	88	86	83			
10	123	103	119	100	115	98	95	118	101	114	99	111	96	94	106	96	104	94	92	97	92	90	87				

配光曲線

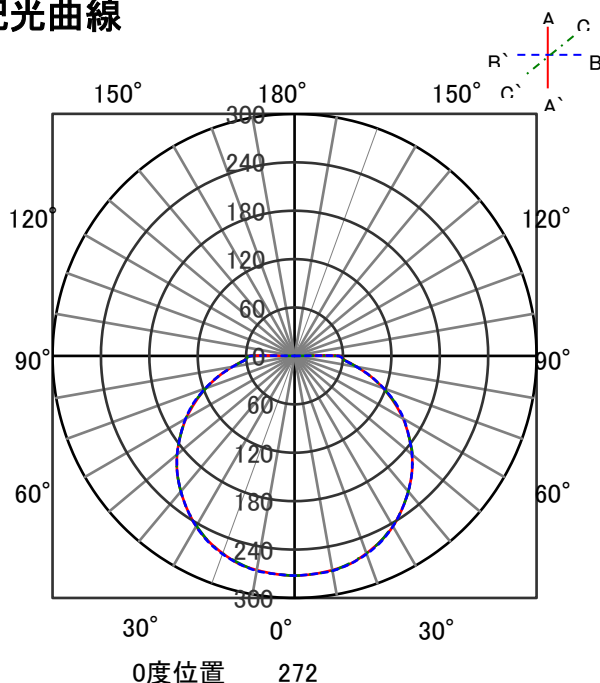


直射水平面照度

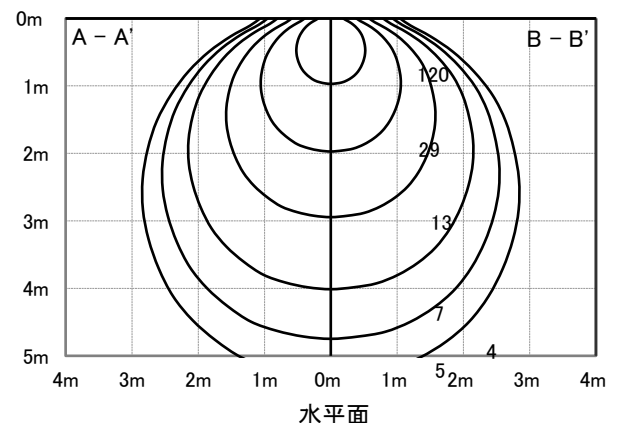

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-B190			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5N-H-GX53-HE140			否	0.63
器具光束	609 lm	最大取付間隔		器具効率	
光源	LED	AA	1.32H	上方向	1%
光源光束	750 lm	BB	1.32H	下方向	99%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0			
室 指 数	0.4	43	40	29	28	21	21	16	42	39	28	28	21	21	16	27	27	21	20	16	20	20	16	14			
	0.6	59	54	44	41	34	33	28	57	53	43	41	34	33	28	41	39	33	32	27	32	32	27	25			
	0.8	69	63	53	50	43	41	35	66	61	52	49	42	41	35	50	47	41	40	34	40	39	34	32			
	1	77	69	62	57	51	49	42	74	68	60	56	51	48	42	57	55	49	47	42	47	46	41	39			
	1.25	85	76	71	65	60	57	50	82	74	69	64	59	56	50	66	62	57	55	49	55	54	49	46			
	1.5	91	80	77	70	66	62	55	87	78	75	69	65	61	55	71	66	63	60	54	60	58	54	51			
	2	99	86	86	77	77	70	64	95	84	84	76	75	69	63	79	73	72	67	62	68	66	61	59			
	2.5	104	90	93	82	84	76	70	100	88	90	81	82	75	70	85	78	78	73	69	75	72	68	64			
	3	108	93	98	86	90	80	75	104	91	95	84	87	79	74	89	82	83	77	73	79	75	72	68			
	4	113	96	105	91	97	86	81	108	94	101	89	94	84	80	94	86	89	82	79	84	80	77	74			
	5	116	98	109	94	103	89	85	111	96	105	92	99	88	85	98	89	94	86	83	88	84	81	78			
	7	120	101	114	97	109	94	91	115	99	110	96	106	93	90	103	93	99	90	88	93	88	86	83			
10	123	103	119	100	115	98	95	118	101	114	99	111	96	94	106	96	104	94	92	97	92	90	87				

配光曲線

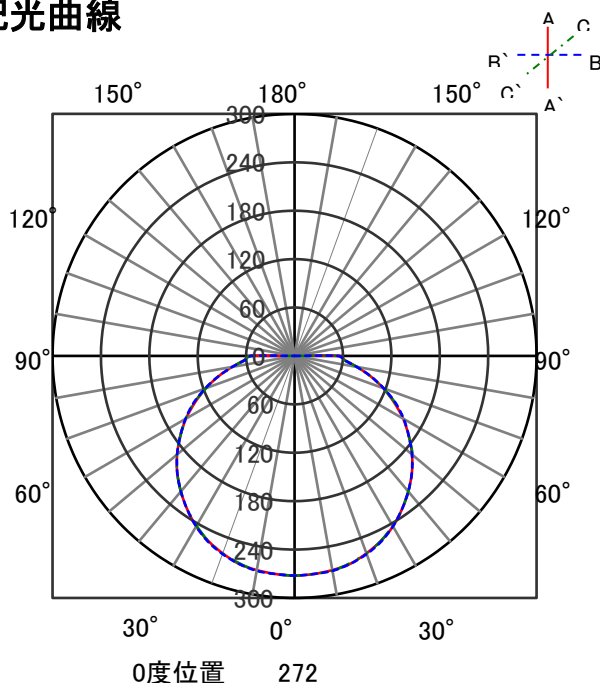


直射水平面照度

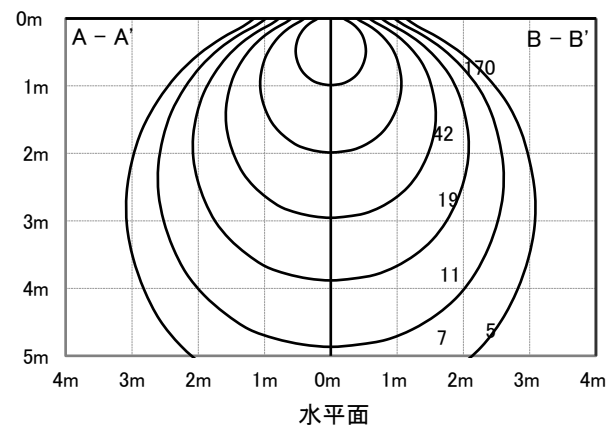

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-B190			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5WW-H-GX53-HE140			否	0.63
器具光束	609 lm	最大取付間隔		上方向	1%
光源	LED	AA	1.32H	下方向	99%
光源光束	750 lm	BB	1.32H	全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	43	40	29	28	21	21	16	42	39	28	28	21	21	16	27	27	21	20	16	20	20	16	14			
	0.6	59	54	44	41	34	33	28	57	53	43	41	34	33	28	41	39	33	32	27	32	32	27	25			
	0.8	69	63	53	50	43	41	35	66	61	52	49	42	41	35	50	47	41	40	34	40	39	34	32			
	1	77	69	62	57	51	49	42	74	68	60	56	51	48	42	57	55	49	47	42	47	46	41	39			
	1.25	85	76	71	65	60	57	50	82	74	69	64	59	56	50	66	62	57	55	49	55	54	49	46			
	1.5	91	80	77	70	66	62	55	87	78	75	69	65	61	55	71	66	63	60	54	60	58	54	51			
	2	99	86	86	77	77	70	64	95	84	84	76	75	69	63	79	73	72	67	62	68	66	61	59			
	2.5	104	90	93	82	84	76	70	100	88	90	81	82	75	70	85	78	78	73	69	75	72	68	64			
	3	108	93	98	86	90	80	75	104	91	95	84	87	79	74	89	82	83	77	73	79	75	72	68			
	4	113	96	105	91	97	86	81	108	94	101	89	94	84	80	94	86	89	82	79	84	80	77	74			
	5	116	98	109	94	103	89	85	111	96	105	92	99	88	85	98	89	94	86	83	88	84	81	78			
	7	120	101	114	97	109	94	91	115	99	110	96	106	93	90	103	93	99	90	88	93	88	86	83			
10	123	103	119	100	115	98	95	118	101	114	99	111	96	94	106	96	104	94	92	97	92	90	87				

配光曲線

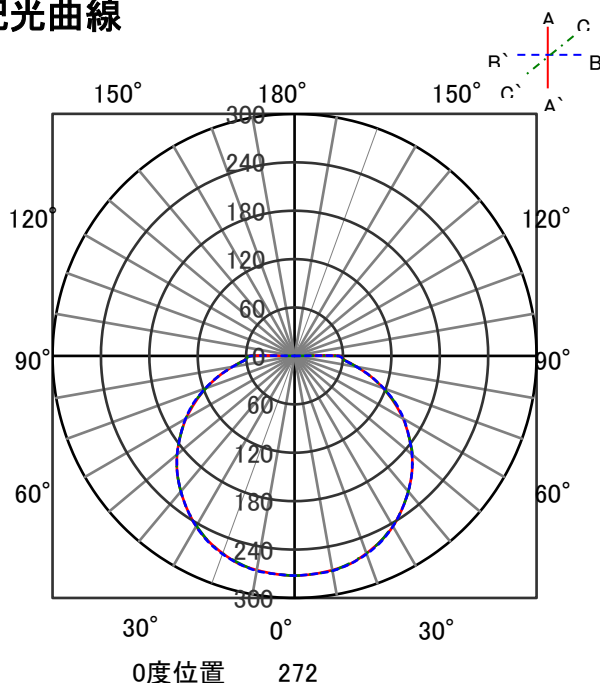


直射水平面照度

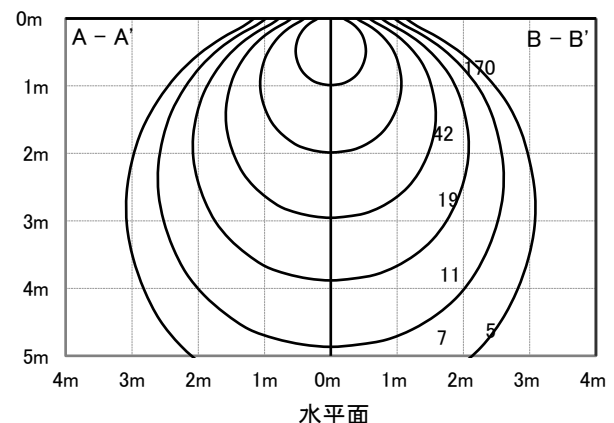

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-B190			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5L-H-GX53-HE140			否	0.63
器具光束	609 lm	最大取付間隔		上方向	1%
光源	LED	AA	1.32H	下方向	99%
光源光束	750 lm	BB	1.32H	全方向	100%




照明率表

作業面照明率(×0.01)																							
反射率(%)	天井	80								70								50					
	壁	70		50		30		10		70		50		30		10		50		30		10	
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30
室 指 数	0.4	43	40	29	28	21	21	16	42	39	28	28	21	21	16	27	27	21	20	16	20	16	14
	0.6	59	54	44	41	34	33	28	57	53	43	41	34	33	28	41	39	33	32	27	32	27	25
	0.8	69	63	53	50	43	41	35	66	61	52	49	42	41	35	50	47	41	40	34	40	39	34
	1	77	69	62	57	51	49	42	74	68	60	56	51	48	42	57	55	49	47	42	47	46	41
	1.25	85	76	71	65	60	57	50	82	74	69	64	59	56	50	66	62	57	55	49	55	54	49
	1.5	91	80	77	70	66	62	55	87	78	75	69	65	61	55	71	66	63	60	54	60	58	54
	2	99	86	86	77	77	70	64	95	84	84	76	75	69	63	79	73	72	67	62	68	66	61
	2.5	104	90	93	82	84	76	70	100	88	90	81	82	75	70	85	78	78	73	69	75	72	68
	3	108	93	98	86	90	80	75	104	91	95	84	87	79	74	89	82	83	77	73	79	75	72
	4	113	96	105	91	97	86	81	108	94	101	89	94	84	80	94	86	89	82	79	84	80	77
	5	116	98	109	94	103	89	85	111	96	105	92	99	88	85	98	89	94	86	83	88	84	81
	7	120	101	114	97	109	94	91	115	99	110	96	106	93	90	103	93	99	90	88	93	88	86
	10	123	103	119	100	115	98	95	118	101	114	99	111	96	94	106	96	104	94	92	97	92	90

配光曲線

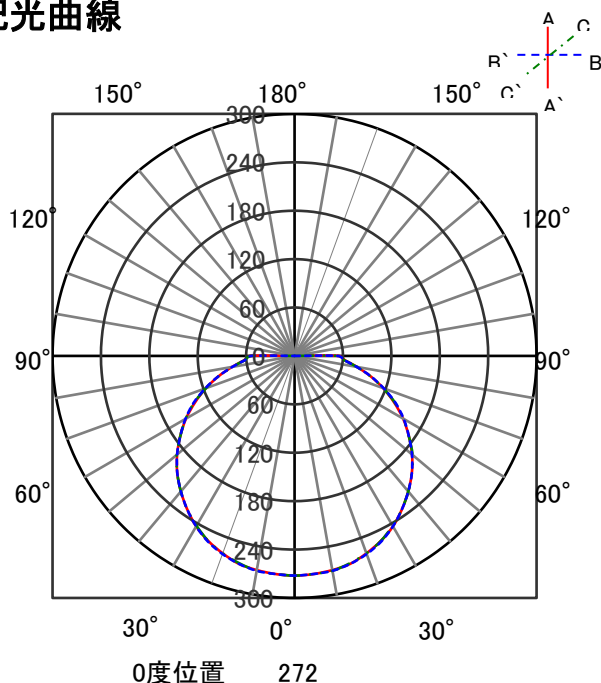


直射水平面照度

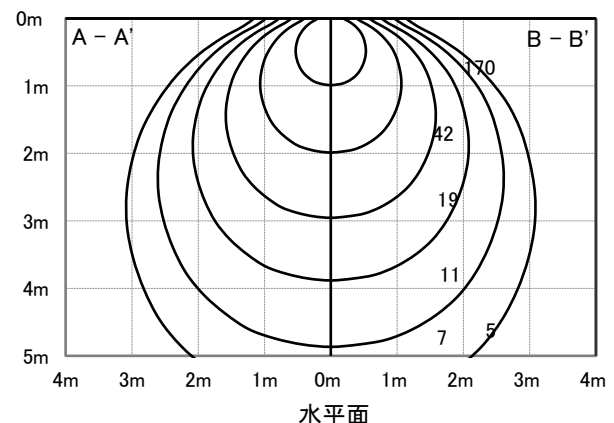

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-B190			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF7N-H-GX53			否	0.63
器具光束	609 lm	最大取付間隔		器具効率	
光源	LED	AA	1.32H	上方向	1%
光源光束	750 lm	BB	1.32H	下方向	99%
				全方向	100%




照明率表

作業面照明率(×0.01)																							
反射率(%)	天井	80								70								50					
	壁	70		50		30		10		70		50		30		10		50		30		10	
	床	30	10	30	10	30	10	10	10	30	10	30	10	30	10	10	10	30	10	30	10	10	10
室 指 数	0.4	43	40	29	28	21	21	16	42	39	28	28	21	21	16	27	27	21	20	16	20	16	14
	0.6	59	54	44	41	34	33	28	57	53	43	41	34	33	28	41	39	33	32	27	32	27	25
	0.8	69	63	53	50	43	41	35	66	61	52	49	42	41	35	50	47	41	40	34	40	39	34
	1	77	69	62	57	51	49	42	74	68	60	56	51	48	42	57	55	49	47	42	47	46	41
	1.25	85	76	71	65	60	57	50	82	74	69	64	59	56	50	66	62	57	55	49	55	54	49
	1.5	91	80	77	70	66	62	55	87	78	75	69	65	61	55	71	66	63	60	54	60	58	54
	2	99	86	86	77	77	70	64	95	84	84	76	75	69	63	79	73	72	67	62	68	66	61
	2.5	104	90	93	82	84	76	70	100	88	90	81	82	75	70	85	78	78	73	69	75	72	68
	3	108	93	98	86	90	80	75	104	91	95	84	87	79	74	89	82	83	77	73	79	75	72
	4	113	96	105	91	97	86	81	108	94	101	89	94	84	80	94	86	89	82	79	84	80	77
	5	116	98	109	94	103	89	85	111	96	105	92	99	88	85	98	89	94	86	83	88	84	81
	7	120	101	114	97	109	94	91	115	99	110	96	106	93	90	103	93	99	90	88	93	88	86
	10	123	103	119	100	115	98	95	118	101	114	99	111	96	94	106	96	104	94	92	97	92	90

配光曲線

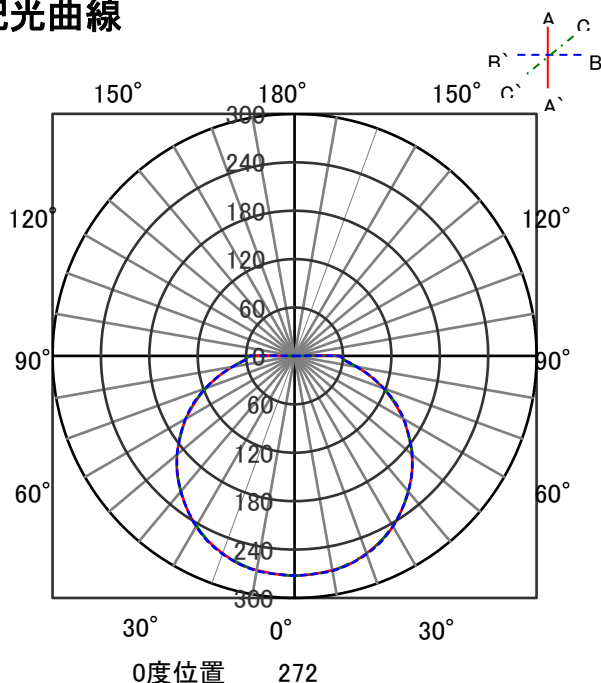


直射水平面照度

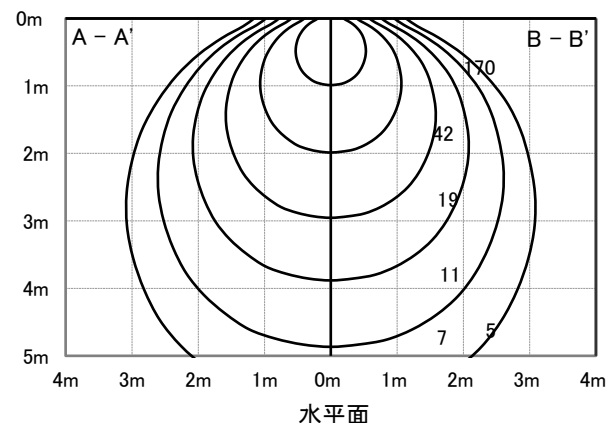

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-B190			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF7WW-H-GX53			否	0.63
器具光束	609 lm	最大取付間隔		器具効率	
光源	LED	AA	1.32H	上方向	1%
光源光束	750 lm	BB	1.32H	下方向	99%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	43	40	29	28	21	21	16	42	39	28	28	21	21	16	27	27	21	20	16	20	20	16	14			
	0.6	59	54	44	41	34	33	28	57	53	43	41	34	33	28	41	39	33	32	27	32	32	27	25			
	0.8	69	63	53	50	43	41	35	66	61	52	49	42	41	35	50	47	41	40	34	40	39	34	32			
	1	77	69	62	57	51	49	42	74	68	60	56	51	48	42	57	55	49	47	42	47	46	41	39			
	1.25	85	76	71	65	60	57	50	82	74	69	64	59	56	50	66	62	57	55	49	55	54	49	46			
	1.5	91	80	77	70	66	62	55	87	78	75	69	65	61	55	71	66	63	60	54	60	58	54	51			
	2	99	86	86	77	77	70	64	95	84	84	76	75	69	63	79	73	72	67	62	68	66	61	59			
	2.5	104	90	93	82	84	76	70	100	88	90	81	82	75	70	85	78	78	73	69	75	72	68	64			
	3	108	93	98	86	90	80	75	104	91	95	84	87	79	74	89	82	83	77	73	79	75	72	68			
	4	113	96	105	91	97	86	81	108	94	101	89	94	84	80	94	86	89	82	79	84	80	77	74			
	5	116	98	109	94	103	89	85	111	96	105	92	99	88	85	98	89	94	86	83	88	84	81	78			
	7	120	101	114	97	109	94	91	115	99	110	96	106	93	90	103	93	99	90	88	93	88	86	83			
10	123	103	119	100	115	98	95	118	101	114	99	111	96	94	106	96	104	94	92	97	92	90	87				

配光曲線

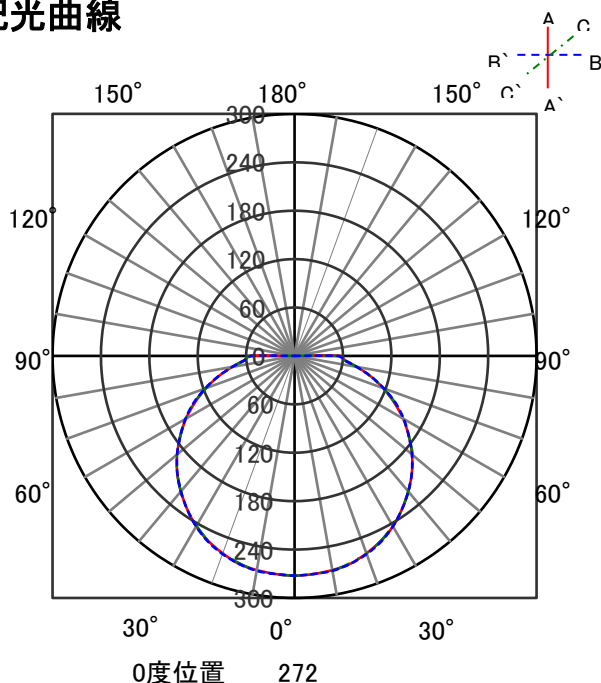


直射水平面照度

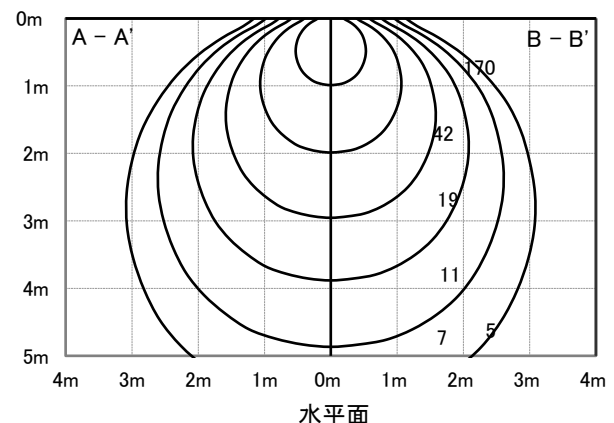

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-B190			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF7L-H-GX53			否	0.63
器具光束	609 lm	最大取付間隔		器具効率	
光源	LED	AA	1.32H	上方向	1%
光源光束	750 lm	BB	1.32H	下方向	99%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	43	40	29	28	21	21	16	42	39	28	28	21	21	16	27	27	21	20	16	20	20	16	14			
	0.6	59	54	44	41	34	33	28	57	53	43	41	34	33	28	41	39	33	32	27	32	32	27	25			
	0.8	69	63	53	50	43	41	35	66	61	52	49	42	41	35	50	47	41	40	34	40	39	34	32			
	1	77	69	62	57	51	49	42	74	68	60	56	51	48	42	57	55	49	47	42	47	46	41	39			
	1.25	85	76	71	65	60	57	50	82	74	69	64	59	56	50	66	62	57	55	49	55	54	49	46			
	1.5	91	80	77	70	66	62	55	87	78	75	69	65	61	55	71	66	63	60	54	60	58	54	51			
	2	99	86	86	77	77	70	64	95	84	84	76	75	69	63	79	73	72	67	62	68	66	61	59			
	2.5	104	90	93	82	84	76	70	100	88	90	81	82	75	70	85	78	78	73	69	75	72	68	64			
	3	108	93	98	86	90	80	75	104	91	95	84	87	79	74	89	82	83	77	73	79	75	72	68			
	4	113	96	105	91	97	86	81	108	94	101	89	94	84	80	94	86	89	82	79	84	80	77	74			
	5	116	98	109	94	103	89	85	111	96	105	92	99	88	85	98	89	94	86	83	88	84	81	78			
	7	120	101	114	97	109	94	91	115	99	110	96	106	93	90	103	93	99	90	88	93	88	86	83			
10	123	103	119	100	115	98	95	118	101	114	99	111	96	94	106	96	104	94	92	97	92	90	87				

配光曲線

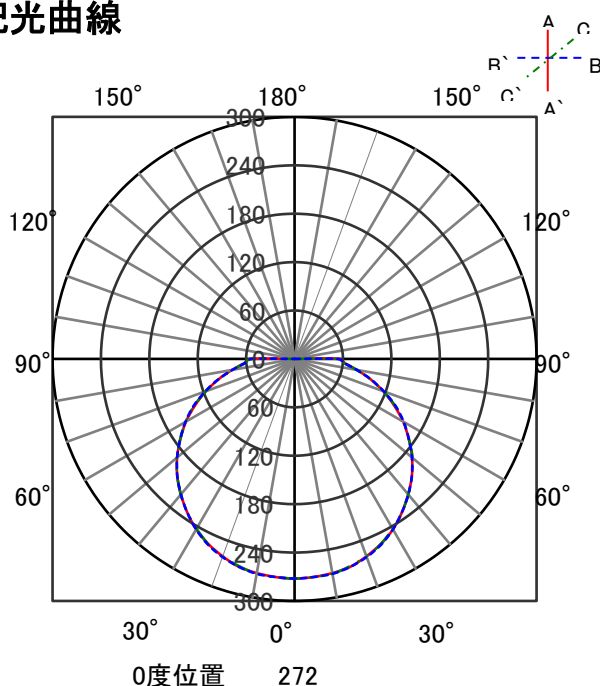


直射水平面照度

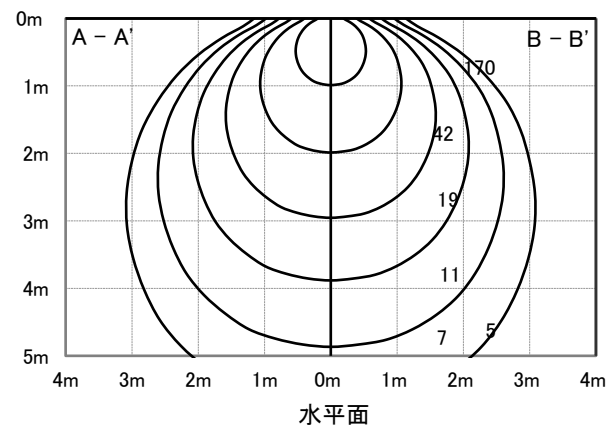

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-B190			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF7N-H-GX53-D			否	0.63
器具光束	609 lm	最大取付間隔		器具効率	
光源	LED	AA	1.32H	上方向	1%
光源光束	750 lm	BB	1.32H	下方向	99%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	43	40	29	28	21	21	16	42	39	28	28	21	21	16	27	27	21	20	16	20	20	16	14			
	0.6	59	54	44	41	34	33	28	57	53	43	41	34	33	28	41	39	33	32	27	32	32	27	25			
	0.8	69	63	53	50	43	41	35	66	61	52	49	42	41	35	50	47	41	40	34	40	39	34	32			
	1	77	69	62	57	51	49	42	74	68	60	56	51	48	42	57	55	49	47	42	47	46	41	39			
	1.25	85	76	71	65	60	57	50	82	74	69	64	59	56	50	66	62	57	55	49	55	54	49	46			
	1.5	91	80	77	70	66	62	55	87	78	75	69	65	61	55	71	66	63	60	54	60	58	54	51			
	2	99	86	86	77	77	70	64	95	84	84	76	75	69	63	79	73	72	67	62	68	66	61	59			
	2.5	104	90	93	82	84	76	70	100	88	90	81	82	75	70	85	78	78	73	69	75	72	68	64			
	3	108	93	98	86	90	80	75	104	91	95	84	87	79	74	89	82	83	77	73	79	75	72	68			
	4	113	96	105	91	97	86	81	108	94	101	89	94	84	80	94	86	89	82	79	84	80	77	74			
	5	116	98	109	94	103	89	85	111	96	105	92	99	88	85	98	89	94	86	83	88	84	81	78			
	7	120	101	114	97	109	94	91	115	99	110	96	106	93	90	103	93	99	90	88	93	88	86	83			
10	123	103	119	100	115	98	95	118	101	114	99	111	96	94	106	96	104	94	92	97	92	90	87				

配光曲線

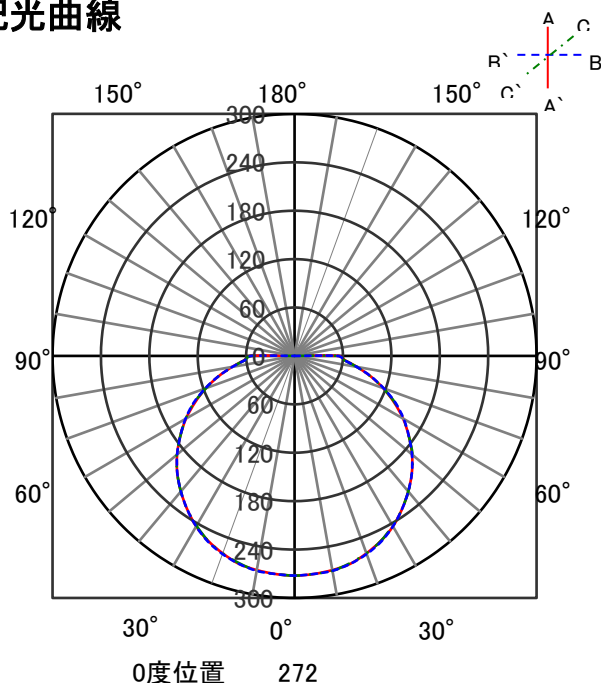


直射水平面照度

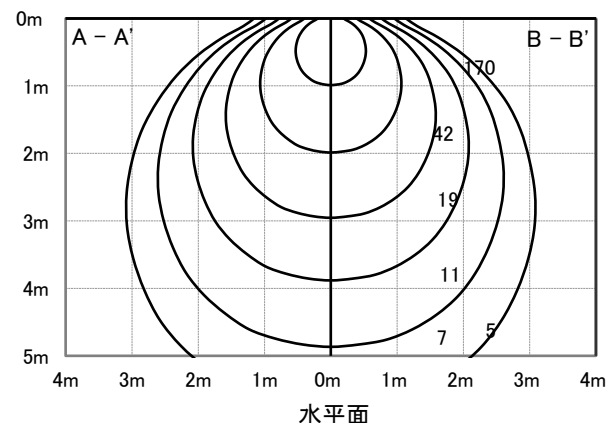

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-B190			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF7WW-H-GX53-D			否	0.63
器具光束	609 lm	最大取付間隔		上方向	1%
光源	LED	AA	1.32H	下方向	99%
光源光束	750 lm	BB	1.32H	全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	43	40	29	28	21	21	16	42	39	28	28	21	21	16	27	27	21	20	16	20	20	16	14			
	0.6	59	54	44	41	34	33	28	57	53	43	41	34	33	28	41	39	33	32	27	32	32	27	25			
	0.8	69	63	53	50	43	41	35	66	61	52	49	42	41	35	50	47	41	40	34	40	39	34	32			
	1	77	69	62	57	51	49	42	74	68	60	56	51	48	42	57	55	49	47	42	47	46	41	39			
	1.25	85	76	71	65	60	57	50	82	74	69	64	59	56	50	66	62	57	55	49	55	54	49	46			
	1.5	91	80	77	70	66	62	55	87	78	75	69	65	61	55	71	66	63	60	54	60	58	54	51			
	2	99	86	86	77	77	70	64	95	84	84	76	75	69	63	79	73	72	67	62	68	66	61	59			
	2.5	104	90	93	82	84	76	70	100	88	90	81	82	75	70	85	78	78	73	69	75	72	68	64			
	3	108	93	98	86	90	80	75	104	91	95	84	87	79	74	89	82	83	77	73	79	75	72	68			
	4	113	96	105	91	97	86	81	108	94	101	89	94	84	80	94	86	89	82	79	84	80	77	74			
	5	116	98	109	94	103	89	85	111	96	105	92	99	88	85	98	89	94	86	83	88	84	81	78			
	7	120	101	114	97	109	94	91	115	99	110	96	106	93	90	103	93	99	90	88	93	88	86	83			
10	123	103	119	100	115	98	95	118	101	114	99	111	96	94	106	96	104	94	92	97	92	90	87				

配光曲線

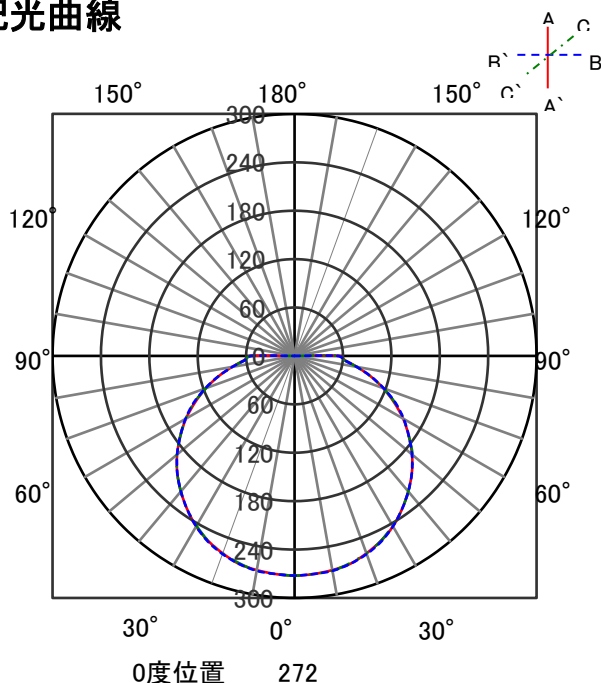


直射水平面照度

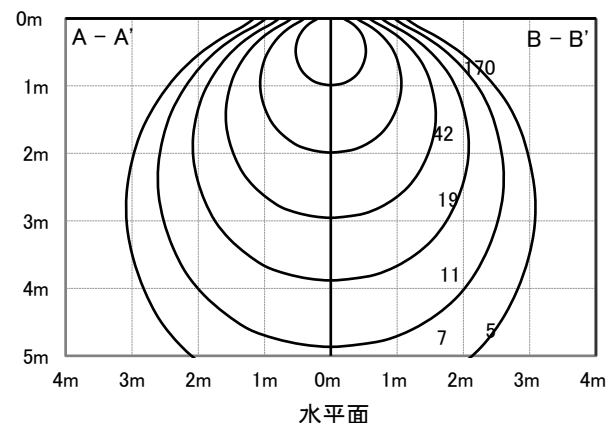

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PEGX53-B190			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF7L-H-GX53-D			否	0.63
器具光束	609 lm	最大取付間隔		器具効率	
光源	LED	AA	1.32H	上方向	1%
光源光束	750 lm	BB	1.32H	下方向	99%
				全方向	100%



照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	43	40	29	28	21	21	16	42	39	28	28	21	21	16	27	27	21	20	16	20	20	16	14			
	0.6	59	54	44	41	34	33	28	57	53	43	41	34	33	28	41	39	33	32	27	32	32	27	25			
	0.8	69	63	53	50	43	41	35	66	61	52	49	42	41	35	50	47	41	40	34	40	39	34	32			
	1	77	69	62	57	51	49	42	74	68	60	56	51	48	42	57	55	49	47	42	47	46	41	39			
	1.25	85	76	71	65	60	57	50	82	74	69	64	59	56	50	66	62	57	55	49	55	54	49	46			
	1.5	91	80	77	70	66	62	55	87	78	75	69	65	61	55	71	66	63	60	54	60	58	54	51			
	2	99	86	86	77	77	70	64	95	84	84	76	75	69	63	79	73	72	67	62	68	66	61	59			
	2.5	104	90	93	82	84	76	70	100	88	90	81	82	75	70	85	78	78	73	69	75	72	68	64			
	3	108	93	98	86	90	80	75	104	91	95	84	87	79	74	89	82	83	77	73	79	75	72	68			
	4	113	96	105	91	97	86	81	108	94	101	89	94	84	80	94	86	89	82	79	84	80	77	74			
	5	116	98	109	94	103	89	85	111	96	105	92	99	88	85	98	89	94	86	83	88	84	81	78			
	7	120	101	114	97	109	94	91	115	99	110	96	106	93	90	103	93	99	90	88	93	88	86	83			
10	123	103	119	100	115	98	95	118	101	114	99	111	96	94	106	96	104	94	92	97	92	90	87				

配光曲線

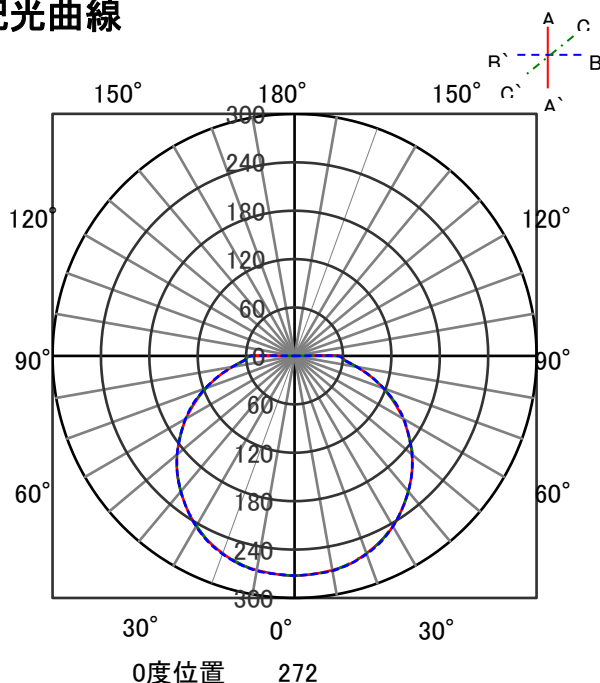

直射水平面照度

