


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PSGX53-W120			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF3N-H-GX53-HE140			否	0.63
器具光束	423 lm	最大取付間隔			器具効率
光源	LED	AA	1.53H	上方向	3%
光源光束	480 lm	BB	1.53H	下方向	97%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	40	37	26	25	18	17	13	39	36	25	24	18	17	13	24	23	17	17	12	17	16	12	10			
	0.6	54	50	39	37	29	28	22	52	49	38	36	28	28	22	36	34	28	27	22	27	26	21	19			
	0.8	64	58	48	45	37	35	29	62	57	46	44	36	35	29	44	42	35	34	28	34	33	28	25			
	1	73	65	56	52	45	43	35	69	63	54	51	44	42	35	51	49	42	41	35	41	40	34	31			
	1.25	80	72	65	59	53	50	43	77	69	63	58	52	49	42	59	56	50	48	42	48	46	41	38			
	1.5	86	76	71	64	59	55	48	82	74	68	63	58	54	47	64	60	55	53	47	53	51	46	42			
	2	94	82	80	72	69	63	56	90	80	78	70	68	62	56	73	67	64	61	55	61	59	54	50			
	2.5	100	86	87	77	77	70	63	95	84	84	76	75	69	62	79	73	71	66	61	67	65	60	56			
	3	104	89	92	81	83	74	68	99	87	89	79	80	73	67	83	76	76	71	66	72	69	64	61			
	4	109	93	99	86	91	80	75	104	91	96	84	88	79	74	89	81	83	77	72	78	74	70	67			
	5	113	95	104	90	97	84	79	108	93	100	88	94	83	78	93	85	88	81	77	82	78	75	71			
	7	117	98	110	94	104	90	85	112	96	106	92	100	88	84	98	89	94	86	82	88	83	80	77			
10	120	101	115	97	110	94	91	115	99	111	96	106	93	90	102	93	99	90	87	92	87	85	81				

配光曲線

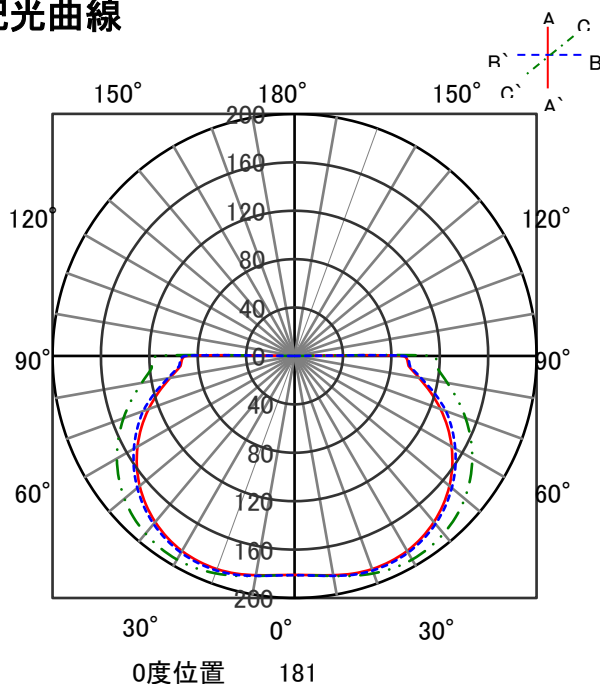


直射水平面照度

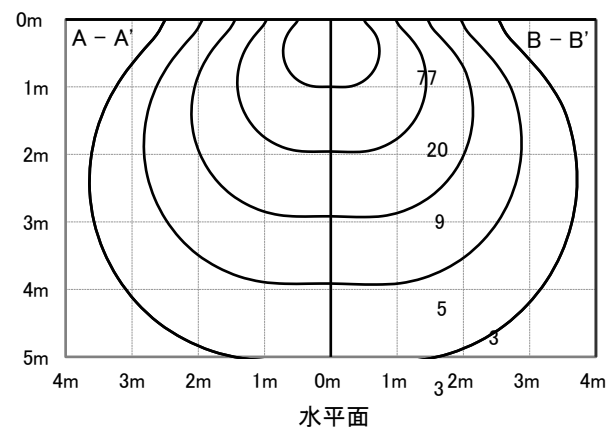

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PSGX53-W120			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF3WW-H-GX53-HE140			否	0.63
器具光束	423 lm	最大取付間隔		器具効率	
光源	LED	AA	1.53H	上方向	3%
光源光束	480 lm	BB	1.53H	下方向	97%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	0		
室 指 数	0.4	40	37	26	25	18	17	13	39	36	25	24	18	17	13	24	23	17	17	12	17	16	12	10			
	0.6	54	50	39	37	29	28	22	52	49	38	36	28	28	22	36	34	28	27	22	27	26	21	19			
	0.8	64	58	48	45	37	35	29	62	57	46	44	36	35	29	44	42	35	34	28	34	33	28	25			
	1	73	65	56	52	45	43	35	69	63	54	51	44	42	35	51	49	42	41	35	41	40	34	31			
	1.25	80	72	65	59	53	50	43	77	69	63	58	52	49	42	59	56	50	48	42	48	46	41	38			
	1.5	86	76	71	64	59	55	48	82	74	68	63	58	54	47	64	60	55	53	47	53	51	46	42			
	2	94	82	80	72	69	63	56	90	80	78	70	68	62	56	73	67	64	61	55	61	59	54	50			
	2.5	100	86	87	77	77	70	63	95	84	84	76	75	69	62	79	73	71	66	61	67	65	60	56			
	3	104	89	92	81	83	74	68	99	87	89	79	80	73	67	83	76	76	71	66	72	69	64	61			
	4	109	93	99	86	91	80	75	104	91	96	84	88	79	74	89	81	83	77	72	78	74	70	67			
	5	113	95	104	90	97	84	79	108	93	100	88	94	83	78	93	85	88	81	77	82	78	75	71			
	7	117	98	110	94	104	90	85	112	96	106	92	100	88	84	98	89	94	86	82	88	83	80	77			
10	120	101	115	97	110	94	91	115	99	111	96	106	93	90	102	93	99	90	87	92	87	85	81				

配光曲線

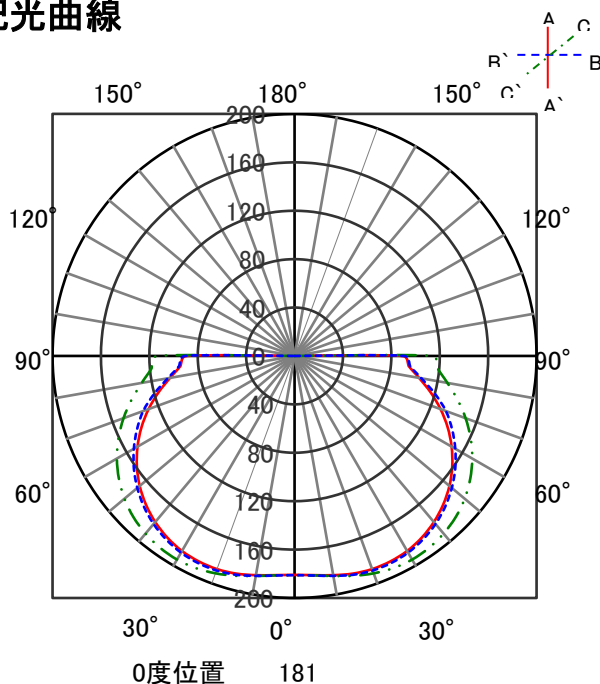


直射水平面照度

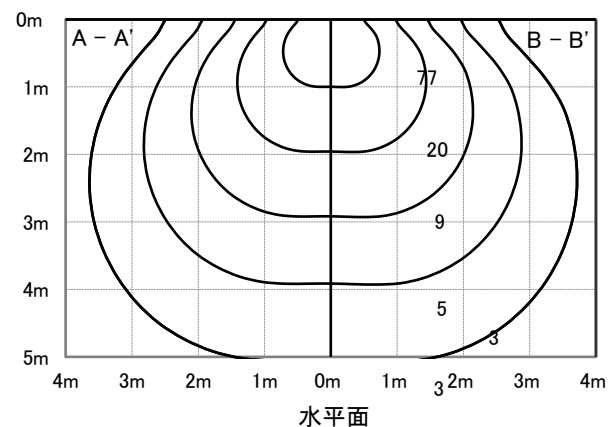

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PSGX53-W120			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF3L-H-GX53-HE140			否	0.63
器具光束	423 lm	最大取付間隔			器具効率
光源	LED	AA	1.53H	上方向	3%
光源光束	480 lm	BB	1.53H	下方向	97%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	40	37	26	25	18	17	13	39	36	25	24	18	17	13	24	23	17	17	12	17	16	12	10			
	0.6	54	50	39	37	29	28	22	52	49	38	36	28	28	22	36	34	28	27	22	27	26	21	19			
	0.8	64	58	48	45	37	35	29	62	57	46	44	36	35	29	44	42	35	34	28	34	33	28	25			
	1	73	65	56	52	45	43	35	69	63	54	51	44	42	35	51	49	42	41	35	41	40	34	31			
	1.25	80	72	65	59	53	50	43	77	69	63	58	52	49	42	59	56	50	48	42	48	46	41	38			
	1.5	86	76	71	64	59	55	48	82	74	68	63	58	54	47	64	60	55	53	47	53	51	46	42			
	2	94	82	80	72	69	63	56	90	80	78	70	68	62	56	73	67	64	61	55	61	59	54	50			
	2.5	100	86	87	77	77	70	63	95	84	84	76	75	69	62	79	73	71	66	61	67	65	60	56			
	3	104	89	92	81	83	74	68	99	87	89	79	80	73	67	83	76	76	71	66	72	69	64	61			
	4	109	93	99	86	91	80	75	104	91	96	84	88	79	74	89	81	83	77	72	78	74	70	67			
	5	113	95	104	90	97	84	79	108	93	100	88	94	83	78	93	85	88	81	77	82	78	75	71			
	7	117	98	110	94	104	90	85	112	96	106	92	100	88	84	98	89	94	86	82	88	83	80	77			
10	120	101	115	97	110	94	91	115	99	111	96	106	93	90	102	93	99	90	87	92	87	85	81				

配光曲線

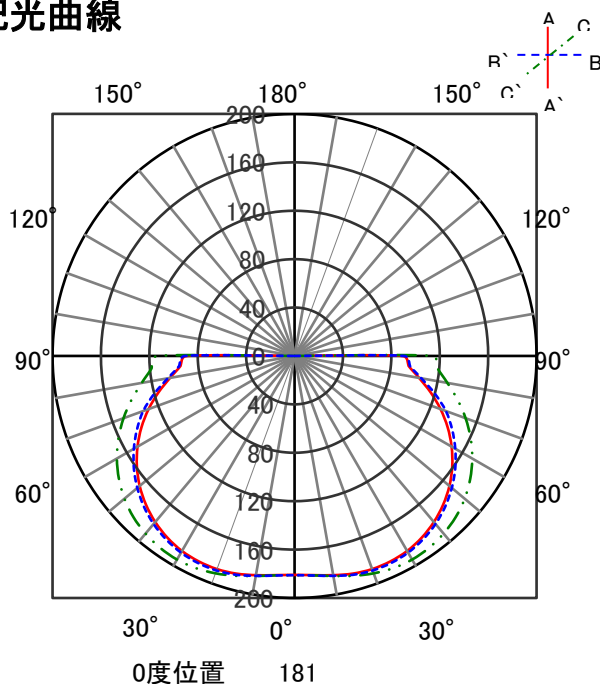


直射水平面照度

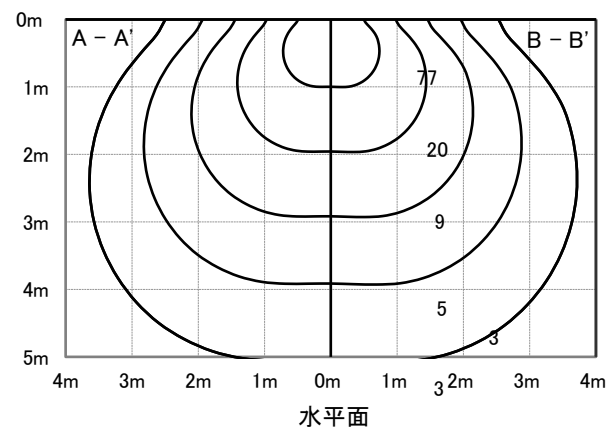

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PSGX53-W120			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5N-H-GX53			否	0.63
器具光束	450 lm	最大取付間隔			器具効率
光源	LED	AA	1.53H	上方向	3%
光源光束	510 lm	BB	1.53H	下方向	97%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	0		
室 指 数	0.4	40	37	26	25	18	17	13	39	36	25	24	18	17	13	24	23	17	17	12	17	16	12	10			
	0.6	54	50	39	37	29	28	22	52	49	38	36	28	28	22	36	34	28	27	22	27	26	21	19			
	0.8	64	58	48	45	37	35	29	62	57	46	44	36	35	29	44	42	35	34	28	34	33	28	25			
	1	73	65	56	52	45	43	35	69	63	54	51	44	42	35	51	49	42	41	35	41	40	34	31			
	1.25	80	72	65	59	53	50	43	77	69	63	58	52	49	42	59	56	50	48	42	48	46	41	38			
	1.5	86	76	71	64	59	55	48	82	74	68	63	58	54	47	64	60	55	53	47	53	51	46	42			
	2	94	82	80	72	69	63	56	90	80	78	70	68	62	56	73	67	64	61	55	61	59	54	50			
	2.5	100	86	87	77	77	70	63	95	84	84	76	75	69	62	79	73	71	66	61	67	65	60	56			
	3	104	89	92	81	83	74	68	99	87	89	79	80	73	67	83	76	76	71	66	72	69	64	61			
	4	109	93	99	86	91	80	75	104	91	96	84	88	79	74	89	81	83	77	72	78	74	70	67			
	5	113	95	104	90	97	84	79	108	93	100	88	94	83	78	93	85	88	81	77	82	78	75	71			
	7	117	98	110	94	104	90	85	112	96	106	92	100	88	84	98	89	94	86	82	88	83	80	77			
10	120	101	115	97	110	94	91	115	99	111	96	106	93	90	102	93	99	90	87	92	87	85	81				

配光曲線

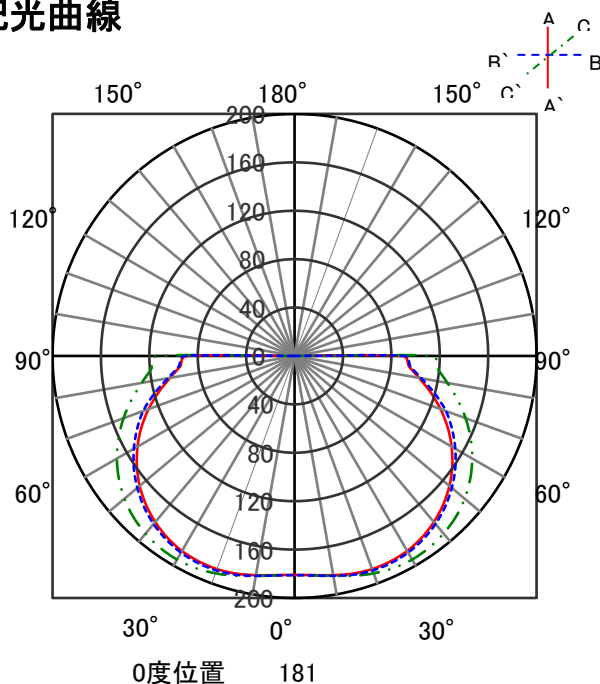


直射水平面照度

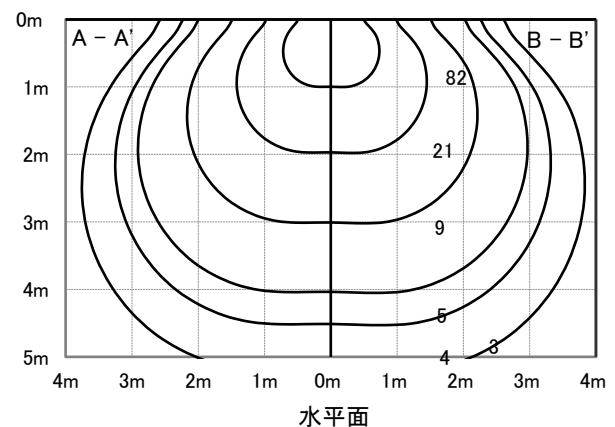

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PSGX53-W120			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5L-H-GX53			否	0.63
器具光束	450 lm	最大取付間隔			器具効率
光源	LED	AA	1.53H	上方向	3%
光源光束	510 lm	BB	1.53H	下方向	97%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	40	37	26	25	18	17	13	39	36	25	24	18	17	13	24	23	17	17	12	17	16	12	10			
	0.6	54	50	39	37	29	28	22	52	49	38	36	28	28	22	36	34	28	27	22	27	26	21	19			
	0.8	64	58	48	45	37	35	29	62	57	46	44	36	35	29	44	42	35	34	28	34	33	28	25			
	1	73	65	56	52	45	43	35	69	63	54	51	44	42	35	51	49	42	41	35	41	40	34	31			
	1.25	80	72	65	59	53	50	43	77	69	63	58	52	49	42	59	56	50	48	42	48	46	41	38			
	1.5	86	76	71	64	59	55	48	82	74	68	63	58	54	47	64	60	55	53	47	53	51	46	42			
	2	94	82	80	72	69	63	56	90	80	78	70	68	62	56	73	67	64	61	55	61	59	54	50			
	2.5	100	86	87	77	77	70	63	95	84	84	76	75	69	62	79	73	71	66	61	67	65	60	56			
	3	104	89	92	81	83	74	68	99	87	89	79	80	73	67	83	76	76	71	66	72	69	64	61			
	4	109	93	99	86	91	80	75	104	91	96	84	88	79	74	89	81	83	77	72	78	74	70	67			
	5	113	95	104	90	97	84	79	108	93	100	88	94	83	78	93	85	88	81	77	82	78	75	71			
	7	117	98	110	94	104	90	85	112	96	106	92	100	88	84	98	89	94	86	82	88	83	80	77			
10	120	101	115	97	110	94	91	115	99	111	96	106	93	90	102	93	99	90	87	92	87	85	81				

配光曲線

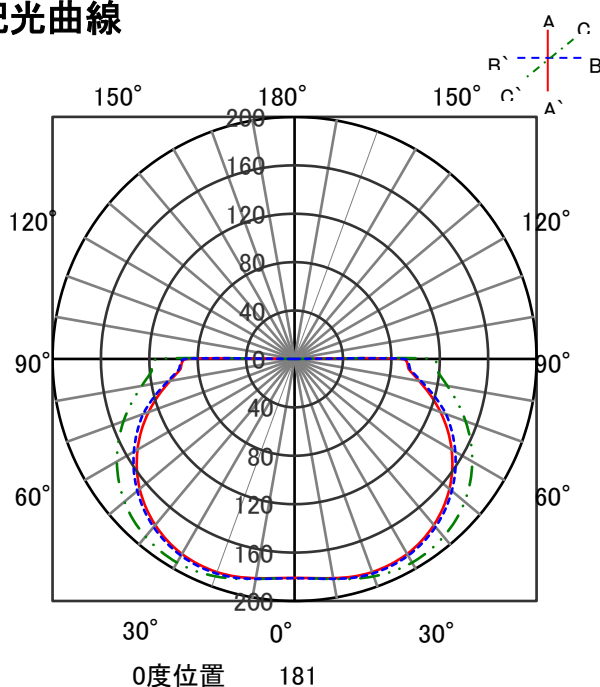


直射水平面照度

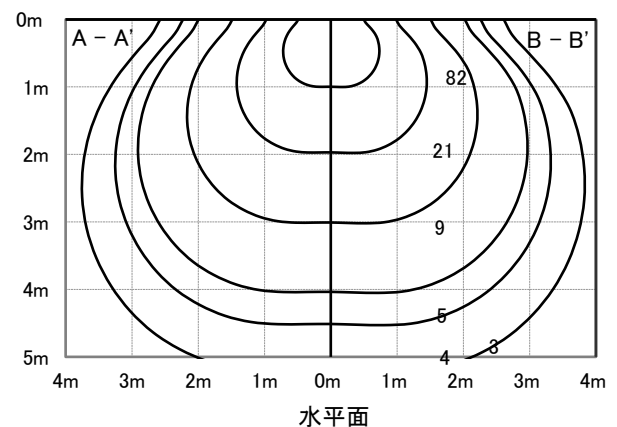

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PSGX53-W120			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5WW-H-GX53			否	0.63
器具光束	450 lm	最大取付間隔		器具効率	
光源	LED	AA	1.53H	上方向	3%
光源光束	510 lm	BB	1.53H	下方向	97%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	40	37	26	25	18	17	13	39	36	25	24	18	17	13	24	23	17	17	12	17	16	12	10			
	0.6	54	50	39	37	29	28	22	52	49	38	36	28	28	22	36	34	28	27	22	27	26	21	19			
	0.8	64	58	48	45	37	35	29	62	57	46	44	36	35	29	44	42	35	34	28	34	33	28	25			
	1	73	65	56	52	45	43	35	69	63	54	51	44	42	35	51	49	42	41	35	41	40	34	31			
	1.25	80	72	65	59	53	50	43	77	69	63	58	52	49	42	59	56	50	48	42	48	46	41	38			
	1.5	86	76	71	64	59	55	48	82	74	68	63	58	54	47	64	60	55	53	47	53	51	46	42			
	2	94	82	80	72	69	63	56	90	80	78	70	68	62	56	73	67	64	61	55	61	59	54	50			
	2.5	100	86	87	77	77	70	63	95	84	84	76	75	69	62	79	73	71	66	61	67	65	60	56			
	3	104	89	92	81	83	74	68	99	87	89	79	80	73	67	83	76	76	71	66	72	69	64	61			
	4	109	93	99	86	91	80	75	104	91	96	84	88	79	74	89	81	83	77	72	78	74	70	67			
	5	113	95	104	90	97	84	79	108	93	100	88	94	83	78	93	85	88	81	77	82	78	75	71			
	7	117	98	110	94	104	90	85	112	96	106	92	100	88	84	98	89	94	86	82	88	83	80	77			
10	120	101	115	97	110	94	91	115	99	111	96	106	93	90	102	93	99	90	87	92	87	85	81				

配光曲線

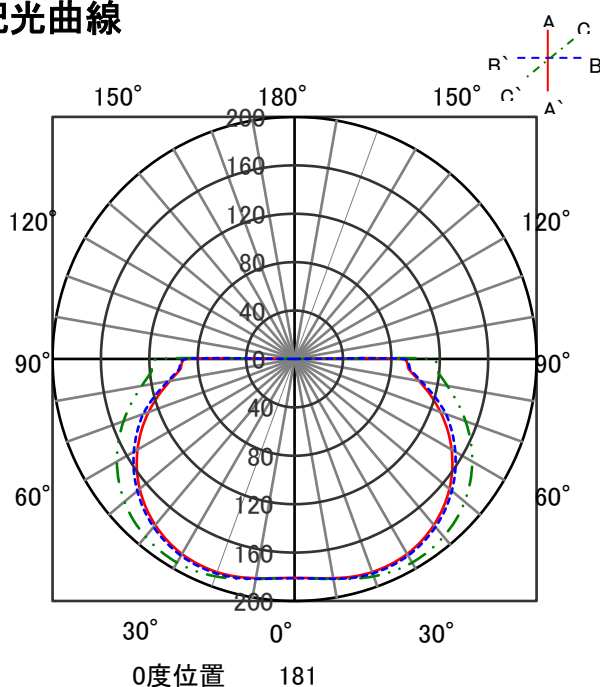


直射水平面照度

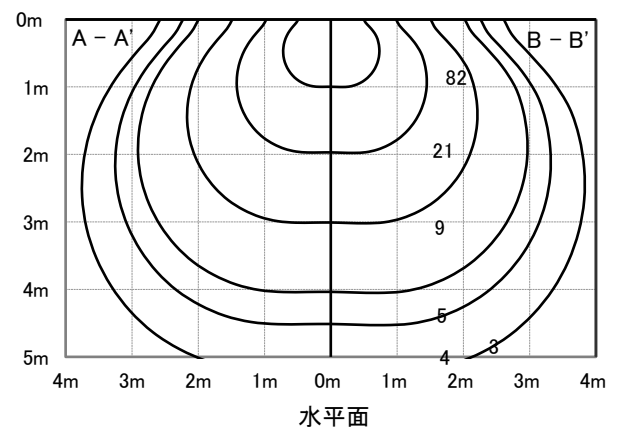

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PSGX53-W120			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5N-H-GX53-D			否	0.63
				器具効率	
器具光束	450 lm	最大取付間隔		上方向	3%
光源	LED	AA	1.53H	下方向	97%
光源光束	510 lm	BB	1.53H	全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	40	37	26	25	18	17	13	39	36	25	24	18	17	13	24	23	17	17	12	17	16	12	10			
	0.6	54	50	39	37	29	28	22	52	49	38	36	28	28	22	36	34	28	27	22	27	26	21	19			
	0.8	64	58	48	45	37	35	29	62	57	46	44	36	35	29	44	42	35	34	28	34	33	28	25			
	1	73	65	56	52	45	43	35	69	63	54	51	44	42	35	51	49	42	41	35	41	40	34	31			
	1.25	80	72	65	59	53	50	43	77	69	63	58	52	49	42	59	56	50	48	42	48	46	41	38			
	1.5	86	76	71	64	59	55	48	82	74	68	63	58	54	47	64	60	55	53	47	53	51	46	42			
	2	94	82	80	72	69	63	56	90	80	78	70	68	62	56	73	67	64	61	55	61	59	54	50			
	2.5	100	86	87	77	77	70	63	95	84	84	76	75	69	62	79	73	71	66	61	67	65	60	56			
	3	104	89	92	81	83	74	68	99	87	89	79	80	73	67	83	76	76	71	66	72	69	64	61			
	4	109	93	99	86	91	80	75	104	91	96	84	88	79	74	89	81	83	77	72	78	74	70	67			
	5	113	95	104	90	97	84	79	108	93	100	88	94	83	78	93	85	88	81	77	82	78	75	71			
	7	117	98	110	94	104	90	85	112	96	106	92	100	88	84	98	89	94	86	82	88	83	80	77			
10	120	101	115	97	110	94	91	115	99	111	96	106	93	90	102	93	99	90	87	92	87	85	81				

配光曲線

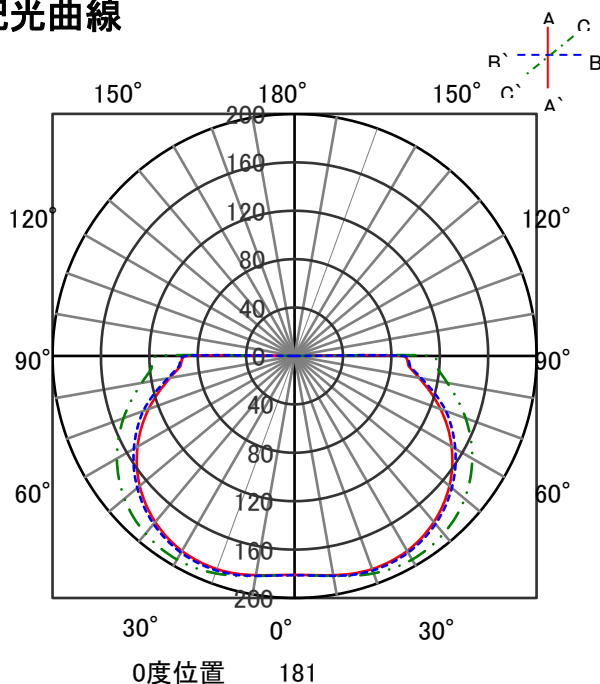


直射水平面照度

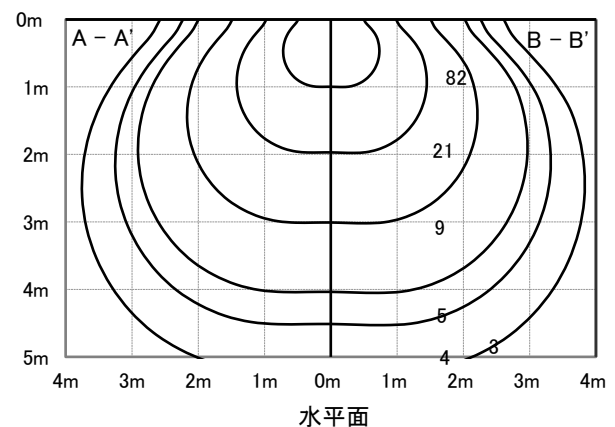

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PSGX53-W120			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5WW-H-GX53-D			否	0.63
器具光束	450 lm	最大取付間隔		器具効率	
光源	LED	AA	1.53H	上方向	3%
光源光束	510 lm	BB	1.53H	下方向	97%
				全方向	100%




照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	40	37	26	25	18	17	13	39	36	25	24	18	17	13	24	23	17	17	12	17	16	12	10			
	0.6	54	50	39	37	29	28	22	52	49	38	36	28	28	22	36	34	28	27	22	27	26	21	19			
	0.8	64	58	48	45	37	35	29	62	57	46	44	36	35	29	44	42	35	34	28	34	33	28	25			
	1	73	65	56	52	45	43	35	69	63	54	51	44	42	35	51	49	42	41	35	41	40	34	31			
	1.25	80	72	65	59	53	50	43	77	69	63	58	52	49	42	59	56	50	48	42	48	46	41	38			
	1.5	86	76	71	64	59	55	48	82	74	68	63	58	54	47	64	60	55	53	47	53	51	46	42			
	2	94	82	80	72	69	63	56	90	80	78	70	68	62	56	73	67	64	61	55	61	59	54	50			
	2.5	100	86	87	77	77	70	63	95	84	84	76	75	69	62	79	73	71	66	61	67	65	60	56			
	3	104	89	92	81	83	74	68	99	87	89	79	80	73	67	83	76	76	71	66	72	69	64	61			
	4	109	93	99	86	91	80	75	104	91	96	84	88	79	74	89	81	83	77	72	78	74	70	67			
	5	113	95	104	90	97	84	79	108	93	100	88	94	83	78	93	85	88	81	77	82	78	75	71			
	7	117	98	110	94	104	90	85	112	96	106	92	100	88	84	98	89	94	86	82	88	83	80	77			
10	120	101	115	97	110	94	91	115	99	111	96	106	93	90	102	93	99	90	87	92	87	85	81				

配光曲線

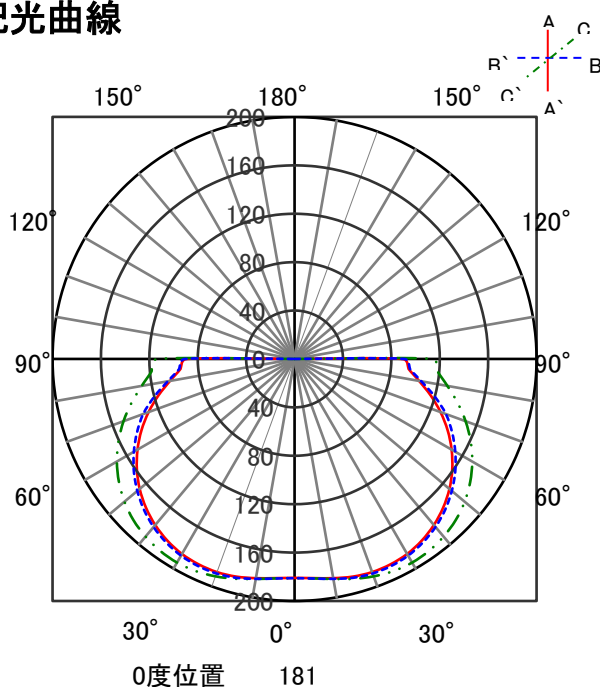


直射水平面照度

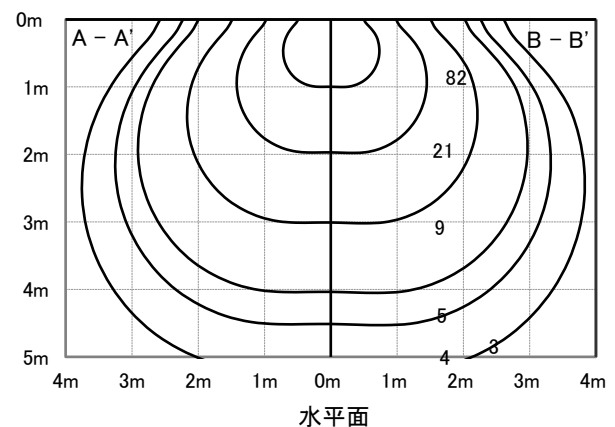

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯			保守率	
器具品番	PSGX53-W120			良	0.69
光源品名	GX53口金LEDランプ			中	0.67
光源品番	LDF5L-H-GX53-D			否	0.63
器具光束	450 lm	最大取付間隔		器具効率	
光源	LED	AA	1.53H	上方向	3%
光源光束	510 lm	BB	1.53H	下方向	97%
				全方向	100%



照明率表

作業面照明率(×0.01)																											
反射率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	40	37	26	25	18	17	13	39	36	25	24	18	17	13	24	23	17	17	12	17	16	12	10			
	0.6	54	50	39	37	29	28	22	52	49	38	36	28	28	22	36	34	28	27	22	27	26	21	19			
	0.8	64	58	48	45	37	35	29	62	57	46	44	36	35	29	44	42	35	34	28	34	33	28	25			
	1	73	65	56	52	45	43	35	69	63	54	51	44	42	35	51	49	42	41	35	41	40	34	31			
	1.25	80	72	65	59	53	50	43	77	69	63	58	52	49	42	59	56	50	48	42	48	46	41	38			
	1.5	86	76	71	64	59	55	48	82	74	68	63	58	54	47	64	60	55	53	47	53	51	46	42			
	2	94	82	80	72	69	63	56	90	80	78	70	68	62	56	73	67	64	61	55	61	59	54	50			
	2.5	100	86	87	77	77	70	63	95	84	84	76	75	69	62	79	73	71	66	61	67	65	60	56			
	3	104	89	92	81	83	74	68	99	87	89	79	80	73	67	83	76	76	71	66	72	69	64	61			
	4	109	93	99	86	91	80	75	104	91	96	84	88	79	74	89	81	83	77	72	78	74	70	67			
	5	113	95	104	90	97	84	79	108	93	100	88	94	83	78	93	85	88	81	77	82	78	75	71			
	7	117	98	110	94	104	90	85	112	96	106	92	100	88	84	98	89	94	86	82	88	83	80	77			
10	120	101	115	97	110	94	91	115	99	111	96	106	93	90	102	93	99	90	87	92	87	85	81				

配光曲線

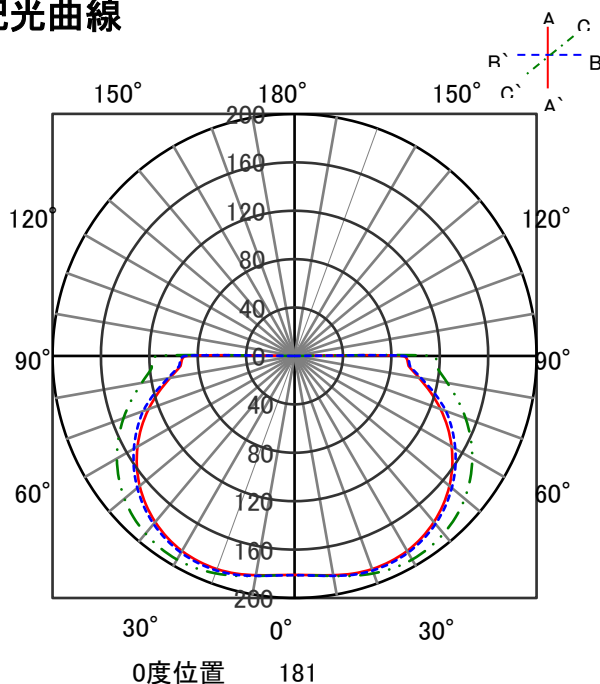

直射水平面照度

