


ECOHiLUX照明器具 配光データシート

意匠図

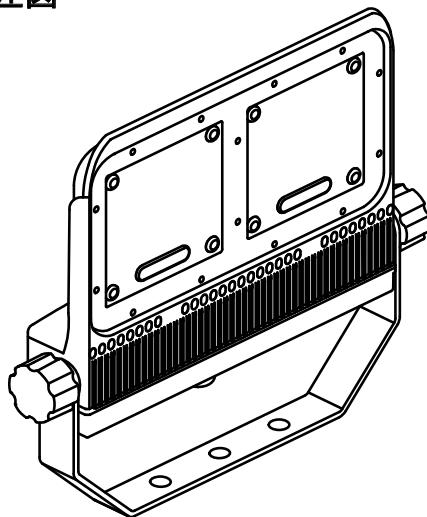

器具品名	LED角型投光器 HW-S	器具光束	10200lm
器具品番	FLS-80W-N-K3-R8-W-H FLS-80W-N-K3-R8-B-H	器具効率	127.5lm/w
配光の区分・種類			2067 cd/1000 lm
ビーム範囲	$I_0/2$	$I_0/10$	$I_0/20$
ビーム効率	58.7%	88.7%	92.9%
ビーム角 AA'	40.0°	62.7°	72.6°
BB'	39.3°	63.8°	72.0°

配光曲線

cd/1000lm

 10^4 10^3 10^2 10^1 10^0 