


# ECOHiLUX照明器具 配光データシート

器具品名	SB形ダウンライト人感センサータイプ(準耐火構造対応)	保守率	
器具品番	LSB100-0627MSCAW-V5	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	450lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

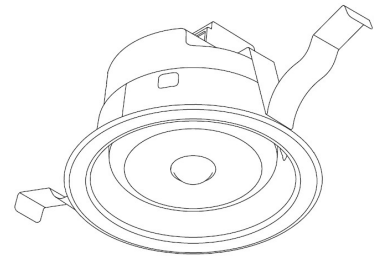


## 照明率表

作業面照明率(×0.01)

反射率(%)	天井	80								70								50						30				0
		70		50		30		10		70		50		30		10		50		30		10		30	10	0		
		壁	床	壁	床	壁	床	壁	床	壁	床	壁	床	壁	床	壁	床	壁	床	壁	床	壁	床	壁	床	壁	床	
室 指 数	0.4	46	44	33	32	25	25	21	45	43	32	31	25	25	21	32	31	25	25	20	25	24	20	19				
	0.6	64	59	50	47	41	40	35	62	58	49	47	41	40	35	48	46	40	39	34	39	39	34	32				
	0.8	74	68	60	56	50	48	43	72	66	59	55	50	48	43	57	54	49	47	42	48	47	42	40				
	1	83	75	69	64	60	57	51	81	73	68	63	59	56	51	65	62	58	56	51	56	55	50	48				
	1.3	92	82	79	72	70	65	60	89	80	77	71	69	65	60	74	70	67	64	59	65	63	59	56				
	1.5	97	85	85	77	76	70	65	94	84	83	76	74	70	65	79	74	72	69	64	70	67	63	61				
	2	105	91	94	84	86	78	73	101	89	92	83	84	77	73	87	81	81	76	72	78	75	71	69				
	2.5	110	95	101	89	93	84	80	106	93	98	88	91	83	79	93	86	87	82	78	84	80	77	75				
	3	113	97	105	92	98	88	84	109	96	102	91	96	87	83	96	89	91	85	82	87	84	81	78				
	4	118	100	111	96	105	92	89	113	99	107	95	102	91	88	101	93	97	90	87	92	88	86	83				
5	120	102	115	99	110	96	93	116	100	111	97	107	95	92	104	95	101	93	91	96	91	89	87					
7	124	104	119	101	115	99	97	119	103	115	100	112	98	96	108	98	105	96	95	100	94	93	90					
10	126	105	123	104	120	102	100	121	104	119	103	116	101	100	111	100	109	99	98	103	97	96	93					

## 配光曲線

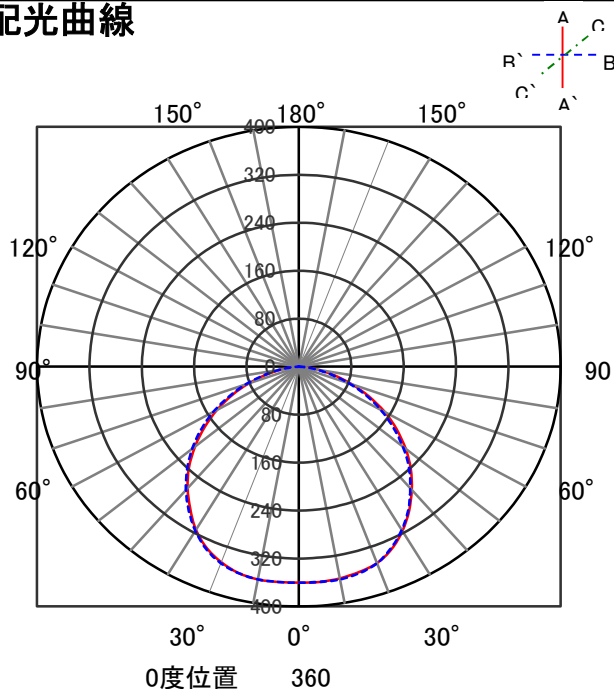

## 直射水平面照度

