



ECOHiLUX照明器具 配光データシート

意匠図

器具品名	LED角型投光器 HW-S		器具光束	4900lm
器具品番	FLS-30W-W-K5-R7-W-H FLS-30W-W-K5-R7-B-H		器具効率	163.3lm/w
配光の 区分・種類			最大光度	591 cd/1000 lm
ビーム範囲	$I_0/2$	$I_0/10$	$I_0/20$	
ビーム効率	70.5%	93.2%	95.5%	
ビーム角 AA'	81.0°	108.4°	115.5°	
BB'	81.1°	108.6°	116.1°	

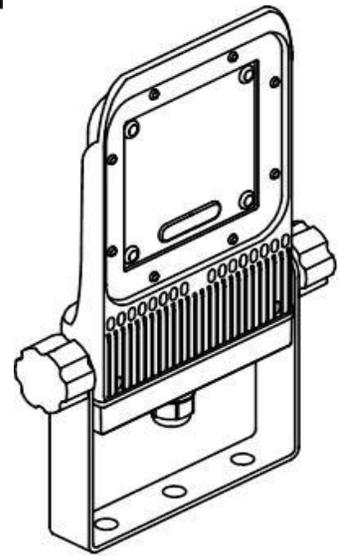

配光曲線

