


## ECOHiLUX照明器具 配光データシート

意匠図

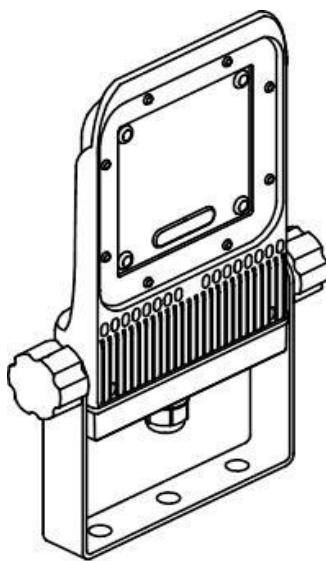

器具品名	LED角型投光器 HW-S	器具光束	3900lm
器具品番	FLS-30W-M-K3-R8-W-H FLS-30W-M-K3-R8-B-H	器具効率	130.0lm/w
配光の区分・種類		最大光度	1001 cd/1000 lm
ビーム範囲	$I_0/2$	$I_0/10$	$I_0/20$
ビーム効率	64.2%	92.6%	96.2%
ビーム角 AA'	62.4°	89.5°	97.6°
BB'	61.0°	89.1°	97.5°

## 配光曲線

cd/1000lm

 $10^4$  $10^2$  $10^1$  $10^0$ 