



ECOHiLUX照明器具 配光データシート

意匠図

| | | | | |
|--------------|--|----------|----------|---|
| 器具品名 | LED角型投光器 HW-S | | 器具光束 | 4900lm |
| 器具品番 | FLS-40W-N-K3-R8-W-H FLS-40W-N-K3-R8-B-H | | 器具効率 | 122.5lm/w |
| 配光の 区分・種類 | | | 最大光度 | 2067 cd/1000 lm |
| ビーム範囲 | $I_0/2$ | $I_0/10$ | $I_0/20$ |  |
| ビーム効率 | 58.7% | 88.7% | 92.9% | |
| ビーム角 AA' | 40.0° | 62.7° | 72.6° | |
| BB' | 39.3° | 63.8° | 72.0° | |

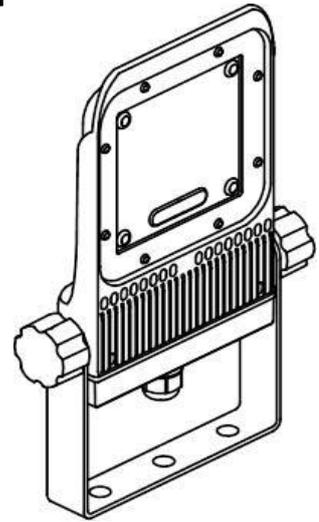

配光曲線

