


ECOHiLUX照明器具 配光データシート


器具品名	ダウンライトSシリーズ	保守率	
器具品番	DL18L39-15W10SW	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	2050 lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

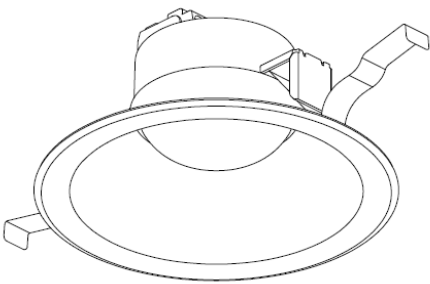

照明率表

作業面照度率(×0.01)																												
反 射 率 (%)	天井	80								70								50						30				0
	壁	70		50		30		10	70		50		30		10	50		30		10	30		10	0				
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0				
室 指 数	0.4	47	44	34	33	26	26	21	46	43	33	32	26	26	21	32	32	26	25	21	26	25	21	20				
	0.6	66	61	52	49	43	42	37	64	59	51	49	43	42	37	49	47	42	41	37	41	41	36	35				
	0.8	77	70	62	59	53	51	46	74	68	61	58	53	51	46	59	57	52	50	45	51	50	45	43				
	1	86	77	72	67	63	60	55	83	75	71	66	62	60	54	68	65	61	59	54	60	58	54	52				
	1.3	94	84	82	75	73	69	64	91	82	80	74	72	68	63	77	73	70	67	63	68	66	63	60				
	1.5	99	88	88	80	79	74	69	96	86	86	79	78	73	69	82	77	76	72	68	73	71	67	65				
	2	107	93	97	87	89	81	77	103	92	95	86	87	81	77	90	84	84	80	76	81	78	75	73				
	2.5	112	97	103	91	96	87	83	108	95	101	90	94	86	83	96	88	90	85	82	87	83	81	78				
	3	115	99	107	94	101	90	87	111	97	104	93	99	89	86	99	91	94	88	85	90	86	84	82				
	4	119	101	113	98	107	94	92	115	100	109	96	105	94	91	103	94	99	92	90	95	90	88	86				
	5	121	103	116	100	112	97	95	117	101	113	99	108	96	94	106	97	103	94	93	98	93	91	89				
7	124	104	120	102	117	100	98	120	103	116	101	113	99	98	109	99	107	97	96	101	96	94	92					
10	126	106	123	104	121	103	101	122	104	119	103	117	102	100	111	101	110	100	98	103	98	97	94					

配光曲線

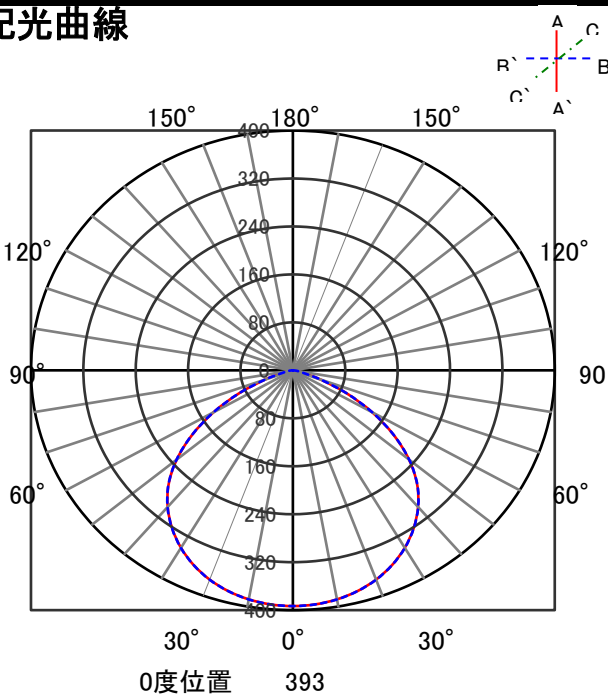

直射水平面照度

