


ECOHiLUX照明器具 配光データシート


器具品名	LEDスポットライトMiOL	保守率	
器具品番	SPC25W8-EMB	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	2500 lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

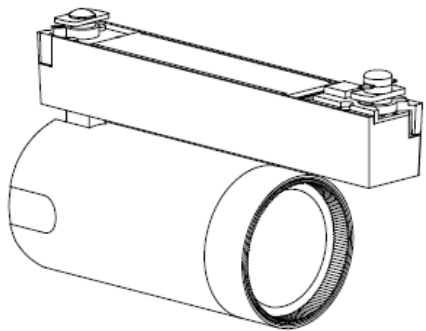

照明率表

作業面照明率(×0.01)																												
反 射 率 (%)	天井	80								70								50						30				0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0			
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0		
室 指 数	0.4	66	62	55	53	48	47	44	65	61	54	52	48	47	44	53	52	48	47	44	47	47	44	43				
	0.6	85	78	74	70	67	65	62	84	78	73	70	67	65	62	72	69	66	65	61	65	64	61	60				
	0.8	96	87	85	80	78	75	71	94	86	84	79	78	75	71	82	78	76	74	71	75	74	71	69				
	1	103	92	92	86	85	81	78	100	91	91	85	85	81	77	88	84	83	80	77	81	79	77	75				
	1.3	109	96	99	91	92	87	84	106	95	98	90	91	86	83	94	89	89	86	83	87	85	82	81				
	1.5	112	99	104	94	97	90	87	110	98	102	93	96	90	87	98	92	93	89	86	91	88	86	84				
	2	118	102	110	98	104	95	92	114	101	108	98	102	95	92	103	96	99	93	91	96	92	90	88				
	2.5	121	105	115	101	109	98	96	118	103	112	100	107	98	96	107	99	103	96	95	99	95	94	91				
	3	124	106	118	103	113	101	99	120	105	115	102	110	100	98	109	101	106	99	97	102	97	96	94				
	4	127	108	122	106	118	104	102	123	107	119	105	115	103	102	112	103	110	102	100	105	100	99	97				
	5	129	109	125	107	122	106	105	125	108	121	106	118	105	104	115	104	112	103	102	107	102	101	98				
7	131	110	129	109	126	108	108	127	109	124	108	122	107	107	117	106	116	106	105	110	104	103	101					
10	133	111	131	111	130	110	110	128	110	127	110	125	109	109	119	108	118	107	107	111	105	105	102					

配光曲線

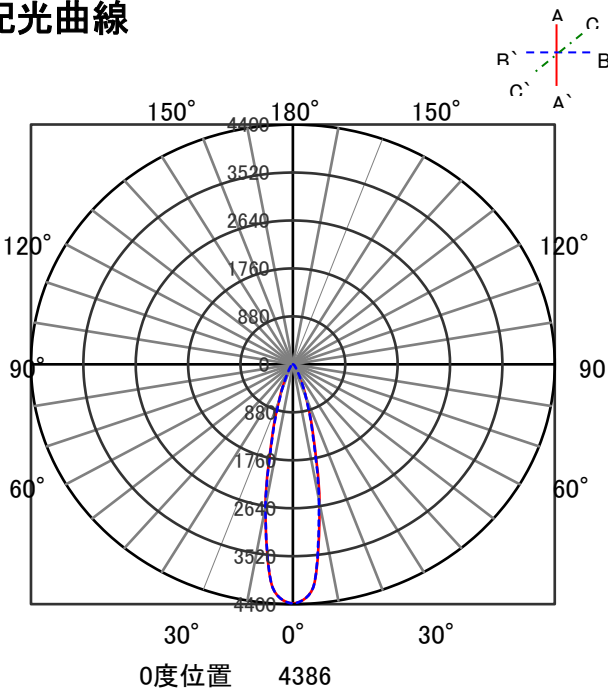

直射水平面照度

