


ECOHiLUX照明器具 配光データシート


器具品名	LEDスポットライトMiOL	保守率	
器具品番	SPC30W8-CMB	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	2400 lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

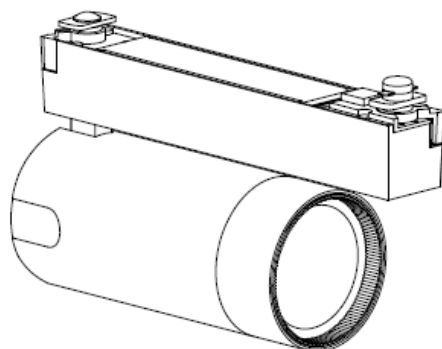

照明率表

作業面照明率(×0.01)																												
反射率(%)	天井	80								70								50						30				0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0			
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0		
室 指 数	0.4	68	64	58	56	52	51	47	67	64	57	55	51	51	47	56	55	51	50	47	51	50	47	46	46	46		
	0.6	88	81	77	74	71	69	66	86	80	77	73	71	69	65	75	72	70	68	65	69	68	65	64	64	64		
	0.8	98	89	88	83	82	78	75	96	88	87	82	81	78	75	85	81	80	77	75	79	77	74	73	73	73		
	1	104	94	95	88	88	84	81	102	93	94	87	88	84	81	91	86	86	83	80	84	82	80	78	78	78		
	1.3	110	98	101	93	95	89	86	108	97	100	92	94	89	86	97	91	92	88	85	90	87	85	83	83	83		
	1.5	114	100	105	96	99	92	89	111	99	103	95	98	92	89	100	94	95	91	89	93	90	88	86	86	86		
	2	118	103	111	100	106	97	94	115	102	109	99	104	96	94	105	97	100	95	93	97	94	92	90	90	90		
	2.5	122	105	116	102	110	100	97	118	104	113	101	108	99	97	108	100	104	98	96	100	96	95	93	93	93		
	3	124	106	119	104	114	102	100	120	105	115	103	111	101	99	110	101	107	100	98	103	98	97	95	95	95		
	4	127	108	123	106	119	105	103	123	107	119	105	116	104	102	113	103	111	102	101	106	101	100	97	97	97		
	5	129	109	125	108	122	107	105	125	108	122	107	119	106	105	115	105	113	104	103	108	102	102	99	99	99		
7	131	110	129	110	127	109	108	127	109	125	109	123	108	107	117	107	116	106	105	110	104	104	101	101	101			
10	133	111	131	111	130	111	110	128	110	127	110	126	109	109	119	108	118	108	107	112	106	105	103	103	103	103		

配光曲線

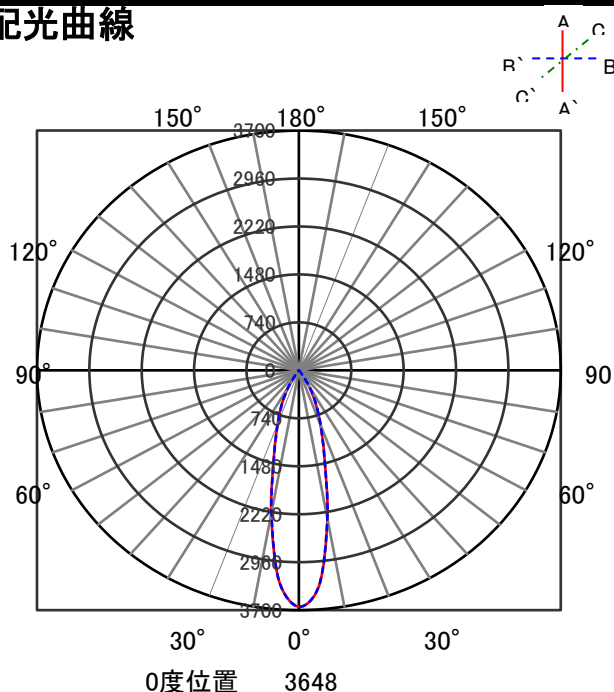

直射水平面照度

