


ECOHiLUX照明器具 配光データシート


器具品名	LEDスポットライトMiOL	保守率	
器具品番	SPC30W8-GWW	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	2700 lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

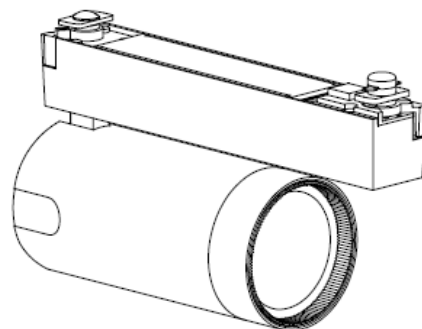

照明率表

作業面照明率(×0.01)																											
反 射 率 (%)	天井	80								70								50						30			0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	64	60	52	51	46	45	42	63	59	52	50	46	45	42	51	50	46	45	42	45	45	42	40			
	0.6	83	76	71	68	65	63	59	81	75	71	67	64	62	59	69	67	64	62	59	63	62	59	57			
	0.8	93	85	82	77	75	72	69	91	84	81	77	75	72	69	79	76	74	72	68	73	71	68	67			
	1	100	90	90	83	83	79	75	98	89	88	83	82	78	75	86	81	80	78	74	79	77	74	73			
	1.3	106	94	97	89	90	84	81	104	93	95	88	89	84	81	92	87	87	83	80	85	82	80	78			
	1.5	110	97	101	92	95	88	85	107	96	99	91	93	87	84	96	90	91	87	84	88	86	83	82			
	2	115	100	108	96	102	93	90	112	99	105	96	100	92	90	101	94	97	91	89	94	90	88	86			
	2.5	119	103	112	99	107	96	94	115	102	110	98	105	96	93	105	97	101	94	92	97	93	91	89			
	3	121	104	116	101	111	99	96	118	103	113	100	108	98	96	107	99	104	97	95	99	95	94	92			
	4	125	106	120	104	116	102	100	121	105	117	103	113	101	99	110	101	108	100	98	103	98	97	95			
	5	127	107	123	106	119	104	103	122	106	119	104	116	103	102	112	103	110	101	100	105	100	99	96			
	7	129	108	126	107	124	106	105	125	107	122	106	120	105	105	115	104	113	104	103	107	102	101	99			
10	131	109	129	109	127	108	108	126	108	125	108	123	107	107	117	106	116	105	105	109	103	103	100				

配光曲線

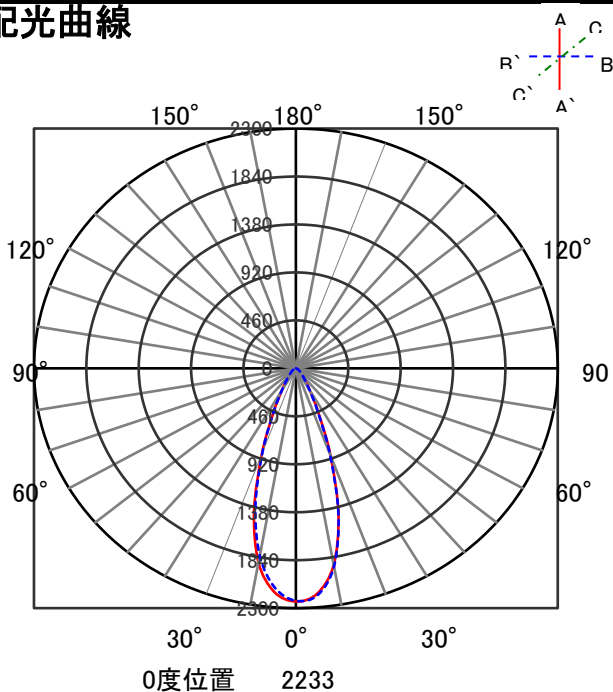

直射水平面照度

