

ECOHiLUX照明器具 配光データシート


器具品名	LEDスポットライトMiOL	保守率	
器具品番	SPC20N8-GWW	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	1820 lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%



照明率表

作業面照明率(×0.01)																									
反 射 率 (%)	天井	80							70							50						30			0
	壁	70		50		30		10	70		50		30		10	50		30		10	30		10	0	
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0	
室 指 数	0.4	65	61	54	52	48	47	44	64	61	54	52	48	47	44	53	51	48	47	44	47	47	44	42	
	0.6	84	78	73	70	67	65	61	83	77	73	69	67	65	61	71	69	66	64	61	65	64	61	60	
	0.8	95	86	84	79	78	74	71	93	85	83	79	77	74	71	81	78	76	74	71	75	73	70	69	
	1	102	91	92	85	85	81	77	99	90	90	84	84	80	77	88	83	82	80	77	81	79	76	75	
	1.3	108	96	98	90	92	86	83	105	94	97	90	91	86	83	94	88	89	85	82	87	84	82	80	
	1.5	111	98	103	93	96	90	87	108	97	101	93	95	89	86	97	91	93	88	86	90	87	85	83	
	2	116	101	109	97	103	94	92	113	100	107	97	101	94	91	102	95	98	93	90	95	91	90	88	
	2.5	120	103	113	100	108	98	95	116	102	111	99	106	97	95	106	98	102	96	94	98	94	93	91	
	3	122	105	116	102	112	100	98	118	104	113	101	109	99	97	108	99	105	98	96	101	96	95	93	
	4	125	107	121	105	117	103	101	121	105	117	104	114	102	100	111	102	109	100	99	104	99	98	95	
	5	127	108	124	106	120	105	103	123	107	120	105	117	104	103	113	103	111	102	101	106	100	100	97	
7	129	109	127	108	125	107	106	125	108	123	107	121	106	105	116	105	114	104	104	108	102	102	99		
10	131	110	129	109	128	109	108	127	109	125	108	124	108	107	117	106	116	106	105	110	104	104	101		

配光曲線

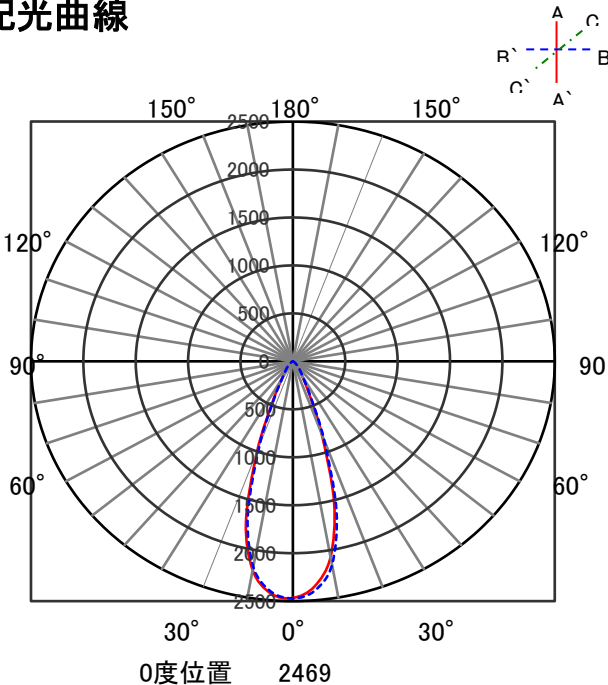

直射水平面照度

