

ECOHiLUX照明器具 配光データシート


器具品名	LEDスポットライトMiOL	保守率	
器具品番	SPC20WW8-GMW	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	1760 lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%



照明率表

作業面照明率(×0.01)																												
反 射 率 (%)	天井	80								70								50						30				0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0			
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0		
室 指 数	0.4	67	63	56	54	49	48	45	66	62	55	53	49	48	45	54	53	49	48	45	49	48	45	44				
	0.6	86	79	75	71	69	66	63	85	78	74	71	68	66	63	73	70	67	66	63	67	65	63	61				
	0.8	97	88	86	81	79	76	73	95	87	85	80	79	76	73	83	79	78	75	72	77	75	72	71				
	1	103	93	93	87	87	82	79	101	92	92	86	86	82	79	89	85	84	81	78	83	80	78	76				
	1.3	109	97	100	92	94	88	85	107	96	98	91	92	87	84	95	90	90	87	84	88	86	83	82				
	1.5	113	100	105	95	98	91	88	110	99	103	94	97	91	88	99	93	94	90	87	92	89	87	85				
	2	118	103	111	99	105	96	93	115	102	108	98	103	95	93	104	97	100	94	92	97	93	91	89				
	2.5	122	105	115	102	110	99	97	118	104	112	101	108	98	96	107	99	104	97	95	100	96	94	92				
	3	124	106	118	104	113	101	99	120	105	115	103	111	101	99	110	101	106	99	97	102	98	96	94				
	4	127	108	123	106	119	104	103	123	107	119	105	116	103	102	113	103	110	102	101	105	100	99	97				
	5	129	109	125	108	122	106	105	125	108	122	107	119	105	104	115	105	113	104	103	107	102	101	99				
	7	131	110	129	109	126	109	108	127	109	125	108	123	108	107	117	106	116	106	105	110	104	104	101				
10	133	111	131	111	130	110	110	128	110	127	110	126	109	109	119	108	118	107	107	112	105	105	102					

配光曲線

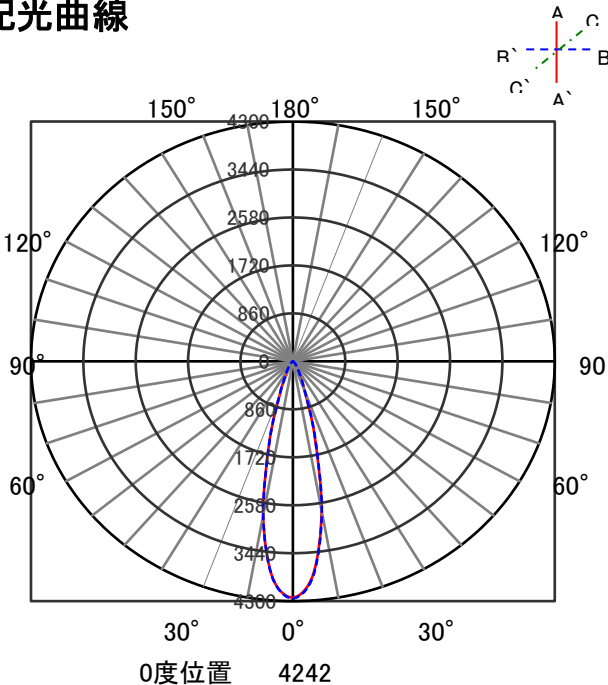

直射水平面照度

