

ECOHiLUX照明器具 配光データシート


器具品名	LEDスポットライトMiOL	保守率	
器具品番	SPC20WW8-FMW	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	1910 lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%



照明率表

作業面照明率(×0.01)																													
反射率(%)	天井	80								70								50						30			0		
	壁	70			50			30		10	70		50			30			10	50		30			10	30		10	0
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	30	10	10	30	10	0	
室 指 数	0.4	68	64	57	55	51	50	47	67	63	57	55	51	50	47	56	54	50	50	47	50	49	46	45					
	0.6	88	81	77	73	70	68	65	86	80	76	73	70	68	65	75	72	69	68	65	69	67	64	63					
	0.8	98	89	88	83	81	78	75	96	88	87	82	81	78	74	85	81	79	77	74	78	77	74	73					
	1	105	94	95	88	88	84	81	103	93	94	88	87	83	80	91	86	86	83	80	84	82	80	78					
	1.3	111	98	102	93	95	89	86	108	97	100	93	94	89	86	97	91	92	88	85	90	87	85	83					
	1.5	115	101	106	96	100	93	90	112	100	104	96	98	92	89	100	94	96	91	89	93	90	88	86					
	2	120	104	112	100	106	97	95	116	103	110	99	105	97	94	105	98	101	95	93	98	94	92	91					
	2.5	123	106	116	103	111	100	98	119	105	114	102	109	100	97	109	100	105	98	96	101	97	95	93					
	3	125	107	120	105	115	102	100	121	106	116	104	112	102	100	111	102	108	100	99	103	99	98	95					
	4	128	109	124	107	120	106	104	124	108	120	106	117	105	103	114	104	111	103	102	107	102	101	98					
	5	130	110	127	109	123	108	106	126	109	123	108	120	107	105	116	106	114	105	104	109	103	102	100					
	7	133	112	130	111	128	110	109	128	110	126	110	124	109	108	119	108	117	107	106	111	105	105	102					
10	134	112	133	112	131	112	111	130	111	128	111	127	111	110	120	109	120	109	108	113	107	106	104						

配光曲線

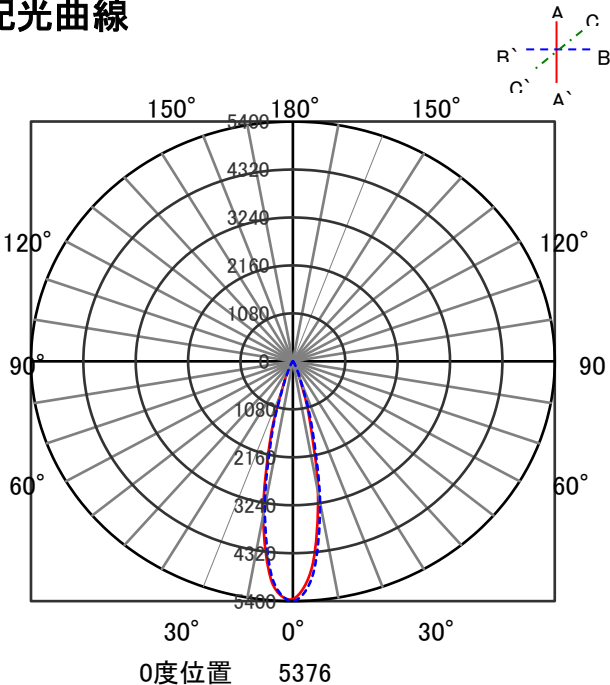

直射水平面照度

