

ECOHiLUX照明器具 配光データシート


|      |                 |      |      |
|------|-----------------|------|------|
| 器具品名 | LEDスポットライトMiOL  | 保守率  |      |
| 器具品番 | SPC10L8-FMW     | 良    | 0.69 |
| 部品品名 | -               | 中    | 0.67 |
| 部品品番 | -               | 否    | 0.63 |
| 器具光束 | 910 lm          | 器具効率 |      |
| 光源   | -               | 上方向  | 0%   |
| 光源光束 | 一体型器具のため、器具光束表示 | 下方向  | 100% |
|      |                 | 全方向  | 100% |



照明率表

| 作業面照明率(×0.01) |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 反射率(%)        | 天井  | 80  |     |     |     |     |     |     |     | 70  |     |     |     |     |     |     |     | 50  |     |     |     |     |     | 0   |
|               | 壁   | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |     |     | 50  |     |     | 30  |     |     | 0   |
|               | 床   | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 0   |
| 室<br>指<br>数   | 0.4 | 68  | 64  | 57  | 55  | 51  | 50  | 47  | 67  | 63  | 57  | 55  | 51  | 50  | 47  | 56  | 54  | 50  | 50  | 47  | 50  | 49  | 46  | 45  |
|               | 0.6 | 88  | 81  | 77  | 73  | 70  | 68  | 65  | 86  | 80  | 76  | 73  | 70  | 68  | 65  | 75  | 72  | 69  | 68  | 65  | 69  | 67  | 64  | 63  |
|               | 0.8 | 98  | 89  | 88  | 83  | 81  | 78  | 75  | 96  | 88  | 87  | 82  | 81  | 78  | 74  | 85  | 81  | 79  | 77  | 74  | 78  | 77  | 74  | 73  |
|               | 1   | 105 | 94  | 95  | 88  | 88  | 84  | 81  | 103 | 93  | 94  | 88  | 87  | 83  | 80  | 91  | 86  | 86  | 83  | 80  | 84  | 82  | 80  | 78  |
|               | 1.3 | 111 | 98  | 102 | 93  | 95  | 89  | 86  | 108 | 97  | 100 | 93  | 94  | 89  | 86  | 97  | 91  | 92  | 88  | 85  | 90  | 87  | 85  | 83  |
|               | 1.5 | 115 | 101 | 106 | 96  | 100 | 93  | 90  | 112 | 100 | 104 | 96  | 98  | 92  | 89  | 100 | 94  | 96  | 91  | 89  | 93  | 90  | 88  | 86  |
|               | 2   | 120 | 104 | 112 | 100 | 106 | 97  | 95  | 116 | 103 | 110 | 99  | 105 | 97  | 94  | 105 | 98  | 101 | 95  | 93  | 98  | 94  | 92  | 91  |
|               | 2.5 | 123 | 106 | 116 | 103 | 111 | 100 | 98  | 119 | 105 | 114 | 102 | 109 | 100 | 97  | 109 | 100 | 105 | 98  | 96  | 101 | 97  | 95  | 93  |
|               | 3   | 125 | 107 | 120 | 105 | 115 | 102 | 100 | 121 | 106 | 116 | 104 | 112 | 102 | 100 | 111 | 102 | 108 | 100 | 99  | 103 | 99  | 98  | 95  |
|               | 4   | 128 | 109 | 124 | 107 | 120 | 106 | 104 | 124 | 108 | 120 | 106 | 117 | 105 | 103 | 114 | 104 | 111 | 103 | 102 | 107 | 102 | 101 | 98  |
|               | 5   | 130 | 110 | 127 | 109 | 123 | 108 | 106 | 126 | 109 | 123 | 108 | 120 | 107 | 105 | 116 | 106 | 114 | 105 | 104 | 109 | 103 | 102 | 100 |
|               | 7   | 133 | 112 | 130 | 111 | 128 | 110 | 109 | 128 | 110 | 126 | 110 | 124 | 109 | 108 | 119 | 108 | 117 | 107 | 106 | 111 | 105 | 105 | 102 |
|               | 10  | 134 | 112 | 133 | 112 | 131 | 112 | 111 | 130 | 111 | 128 | 111 | 127 | 111 | 110 | 120 | 109 | 120 | 109 | 108 | 113 | 107 | 106 | 104 |

配光曲線

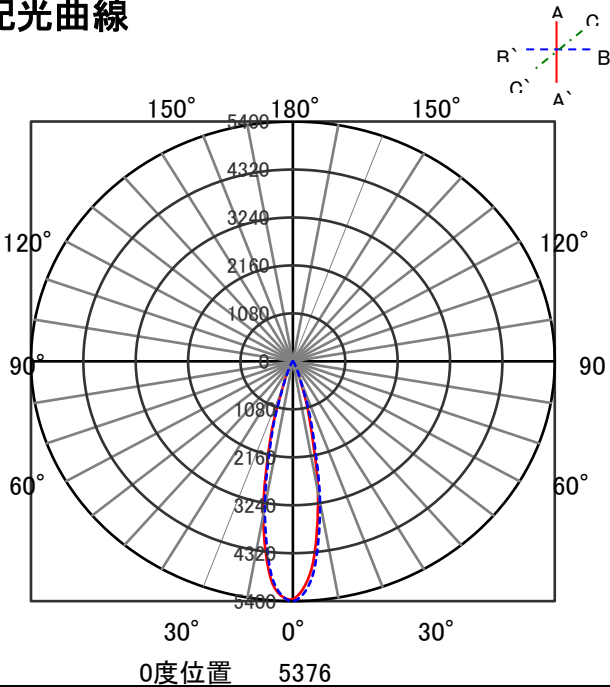

直射水平面照度

