


ECOHiLUX照明器具 配光データシート


器具品名	LEDスポットライト MiOL FOODEE	保守率	
器具品番	SPC22VG-EWB	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	2250 lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

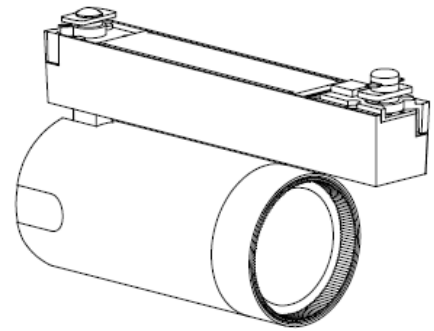

照明率表

作業面照明率(×0.01)																											
反射率(%)	天井	80								70							50						30				0
	壁	70			50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	66	62	55	53	49	48	45	65	61	55	53	49	48	45	54	52	49	48	45	48	48	45	43			
	0.6	85	79	75	71	68	66	63	84	78	74	70	68	66	62	72	70	67	65	62	66	65	62	61			
	0.8	96	87	85	80	79	75	72	94	86	84	80	78	75	72	82	79	77	75	72	76	74	71	70			
	1	102	92	92	86	86	81	78	100	91	91	85	85	81	78	89	84	83	80	78	82	80	77	76			
	1.3	108	96	99	91	93	87	84	106	95	97	90	91	86	84	94	89	89	86	83	87	85	83	81			
	1.5	112	99	103	94	97	90	87	109	98	102	93	96	90	87	98	92	93	89	86	91	88	86	84			
	2	117	102	110	98	104	95	92	114	101	107	97	102	94	92	103	96	99	93	91	96	92	90	88			
	2.5	120	104	114	101	109	98	96	117	103	111	100	107	97	95	106	98	102	96	94	99	95	93	91			
	3	123	105	117	103	112	100	98	119	104	114	102	110	99	98	108	100	105	98	96	101	97	95	93			
	4	126	107	121	105	117	103	102	122	106	118	104	115	102	101	112	102	109	101	100	104	99	98	96			
	5	128	108	124	107	121	105	104	124	107	120	106	118	104	103	114	104	112	103	102	106	101	100	98			
7	130	109	128	108	125	108	107	126	108	124	107	122	107	106	116	105	115	105	104	109	103	103	100				
10	132	110	130	110	129	109	109	127	109	126	109	125	108	108	118	107	117	106	106	111	104	104	102				

配光曲線

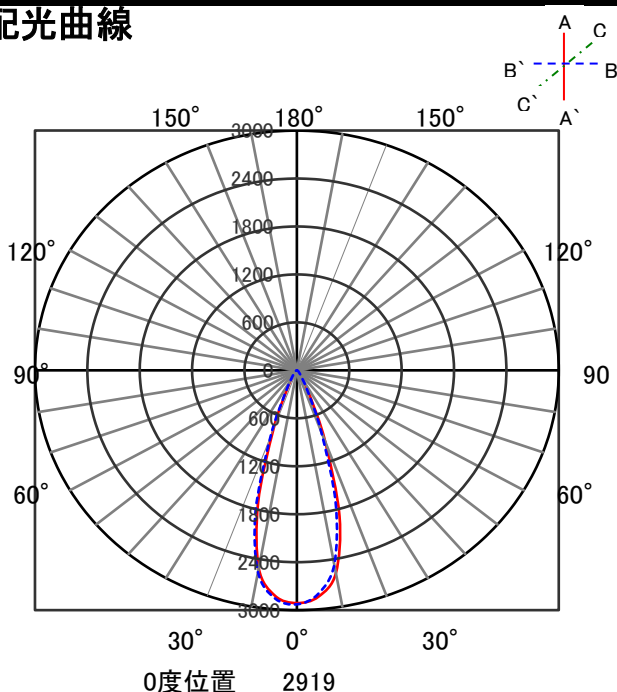

直射水平面照度

