


ECOHiLUX 照明器具 配光データシート

意匠図

器具品名	小型シーリングライト	保守率	
		良	0.67
器具品番	SCL9L-HL		0.63
	中	0.56	
部品品名	-		0.56
	器具効率		
部品品番	-		3%
	上方向	97%	
器具光束	850lm	下方向	100%
光源	LED	全方向	100%
光源光束	一体型器具のため、器具光束表示		

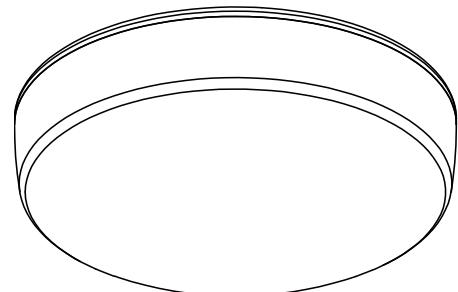


照明率表

作業面照明率(×0.01)

反射率	天井	80										70										50									
		壁		70		50		30		10		70		50		30		10		50		30		10		30		10		0	
		床		30	10	30	10	30	10	10	30	10	30	10	10	10	30	10	30	10	10	10	30	10	10	10	0	0	0		
室 指 数	0.4	43	40	29	28	22	21	17	42	39	29	28	21	21	16	27	27	21	20	16	20	20	16	14							
	0.6	59	54	44	42	35	34	28	57	53	43	41	35	34	28	41	40	34	33	28	33	32	27	25							
	0.8	69	63	54	50	44	42	36	67	61	52	49	43	41	36	50	47	42	40	35	40	39	34	32							
	1	78	70	63	58	52	50	43	75	68	61	57	51	49	43	58	55	49	48	42	48	46	42	39							
	1.25	86	76	72	66	61	58	51	82	74	69	64	60	57	51	66	62	58	55	50	55	54	49	46							
	1.5	91	80	77	70	67	63	56	87	78	75	69	66	62	56	71	66	63	60	55	60	58	54	51							
	2	99	86	87	78	77	71	65	95	84	84	76	75	70	64	79	73	72	68	63	68	66	61	58							
	2.5	104	90	94	83	85	77	71	100	88	90	81	83	75	70	85	78	78	73	69	74	71	67	64							
	3	108	93	98	86	90	80	75	103	90	95	84	88	79	75	88	81	83	77	73	78	75	71	68							
	4	113	96	105	91	98	86	82	108	94	101	89	95	85	81	94	86	89	82	79	84	80	77	73							
	5	116	98	109	94	103	90	86	111	96	105	92	99	88	85	97	89	93	86	83	87	83	80	77							
	7	120	100	114	97	109	94	91	114	98	110	95	105	92	90	102	92	98	90	87	92	87	85	81							
	10	122	102	118	100	115	97	95	117	100	114	98	110	96	94	105	95	102	93	91	96	90	89	85							

配光曲線

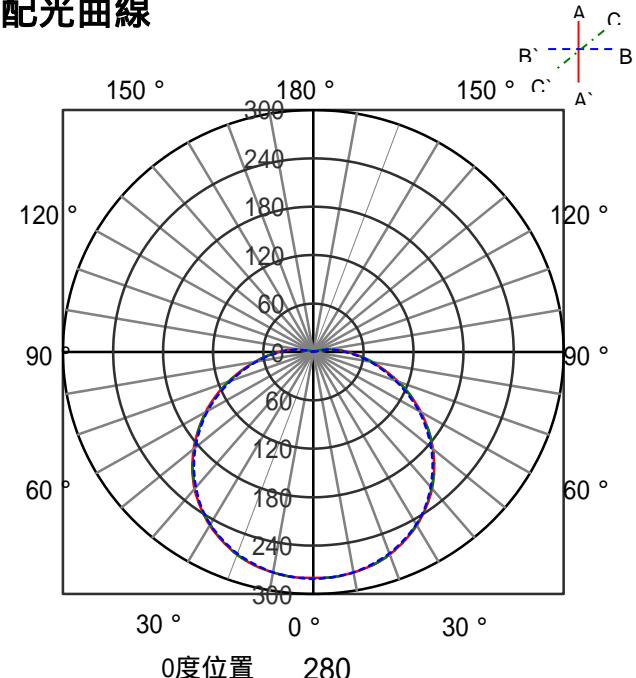

直射水平面照度

