


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	冷ケース用照明	保守率	
器具品番	LDG15FLT・D/RC/HCR	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	650lm	器具効率	
光源	LED	上方向	5%
光源光束	650lm	下方向	95%
		全方向	100%

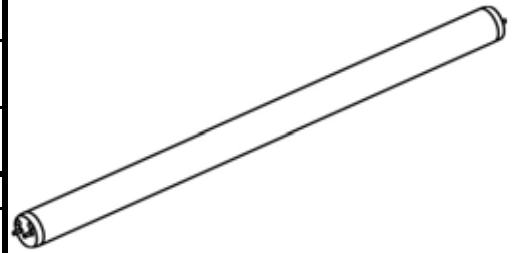

照明率表

作業面照明率(×0.01)																														
(反射率)	天井	80								70								50				30			0					
		壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0	
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
室指数	0.4	43	41	30	29	22	22	17	42	39	29	28	22	21	17	28	27	21	21	17	20	20	16	14	0	0	0	0	0	0
	0.6	59	55	44	42	35	34	29	57	53	43	41	35	34	29	41	40	34	33	28	33	32	28	25	0	0	0	0	0	0
	0.8	69	63	54	51	44	42	36	67	61	52	50	43	42	36	50	47	42	40	35	40	39	34	32	0	0	0	0	0	0
	1	78	70	63	58	53	50	44	75	68	61	57	51	49	43	57	55	49	48	42	47	46	41	38	0	0	0	0	0	0
	1.25	86	76	72	66	62	58	52	82	74	69	64	60	57	51	65	62	58	55	50	55	53	49	46	0	0	0	0	0	0
	1.5	91	80	78	70	68	63	57	87	78	75	69	66	62	56	70	66	63	60	55	60	58	53	50	0	0	0	0	0	0
	2	99	86	87	78	78	71	65	95	84	84	76	75	70	64	78	73	71	67	63	68	65	61	57	0	0	0	0	0	0
	2.5	104	90	94	83	85	77	71	100	88	90	81	83	75	70	84	78	78	73	69	74	71	67	63	0	0	0	0	0	0
	3	108	93	98	86	90	81	76	103	90	95	84	88	79	75	88	81	82	77	73	77	74	71	67	0	0	0	0	0	0
	4	113	96	105	91	98	86	82	108	94	101	89	95	85	81	93	85	88	82	78	83	79	76	72	0	0	0	0	0	0
5	116	98	109	94	103	90	86	111	96	105	92	99	88	85	97	88	93	85	82	87	82	80	75	0	0	0	0	0	0	
7	119	100	114	97	109	94	91	114	98	110	95	105	92	90	101	92	98	89	87	91	86	84	80	0	0	0	0	0	0	
10	122	102	118	100	115	98	95	117	100	113	98	110	96	94	104	94	102	93	91	95	89	88	83	0	0	0	0	0	0	

配光曲線

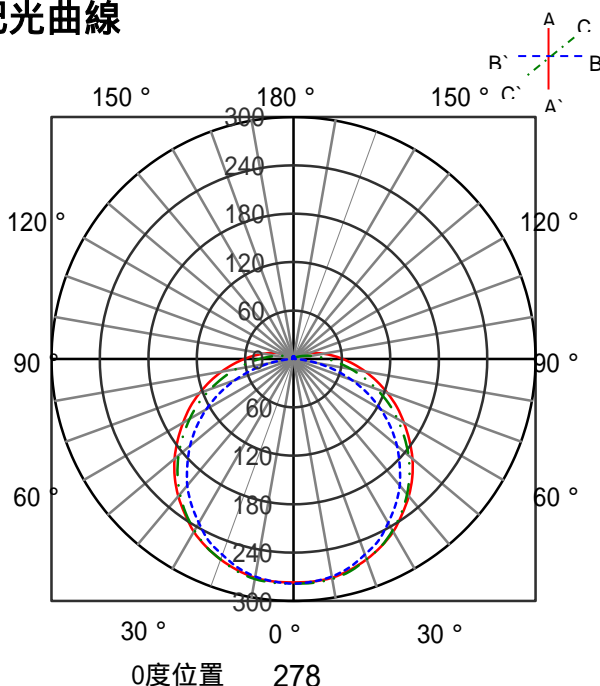

直射水平面照度

