

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDグリッド天井用照明器具	保守率	
器具品番	IRLDGS-442N-600L	良	-
部品品名	-	中	-
部品品番	-	否	-
		器具効率	
器具光束	4400lm	上方向	0%
光源	LED	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%



照明率表

		作業面照明率(×0.01)																						
反射率	天井	80				70				50				30				0						
		壁	70	50	30	10	70	50	30	10	50	30	10	30	10	10	30	10	0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	30	10	10	0
室 指 数	0.4	49	46	36	35	29	29	24	48	45	36	35	29	28	24	35	34	29	28	24	28	28	24	23
	0.6	68	63	55	52	47	45	40	67	62	54	52	46	45	40	53	51	46	45	40	45	44	40	38
	0.8	78	71	64	60	56	53	48	76	70	63	60	55	53	48	61	58	54	52	48	53	52	48	46
	1	87	78	74	68	65	62	56	84	76	72	68	64	61	56	70	66	63	60	56	61	60	56	54
	1.25	95	84	83	76	75	70	65	92	83	81	75	73	69	65	78	74	71	68	64	70	68	64	62
	1.5	100	88	88	80	80	74	69	96	86	86	79	79	74	69	83	77	76	73	68	74	71	68	66
	2	107	93	97	86	89	81	77	103	91	94	85	87	81	76	90	83	84	79	76	81	78	75	73
	2.5	111	96	103	91	96	86	82	108	95	100	90	94	86	82	95	88	90	84	81	86	83	80	78
	3	114	98	107	93	100	89	86	110	97	104	92	98	89	85	98	90	93	87	84	89	86	83	81
	4	118	100	112	97	106	93	90	114	99	108	96	104	93	90	102	93	98	91	88	94	89	87	85
5	121	102	115	99	111	96	94	116	101	112	98	107	95	93	105	96	102	93	91	97	92	90	87	
7	123	104	119	101	116	99	97	119	102	115	100	112	98	96	108	98	106	96	95	100	95	93	90	
10	126	105	123	103	120	102	100	121	104	118	102	116	101	99	111	100	109	99	97	102	97	96	93	

配光曲線

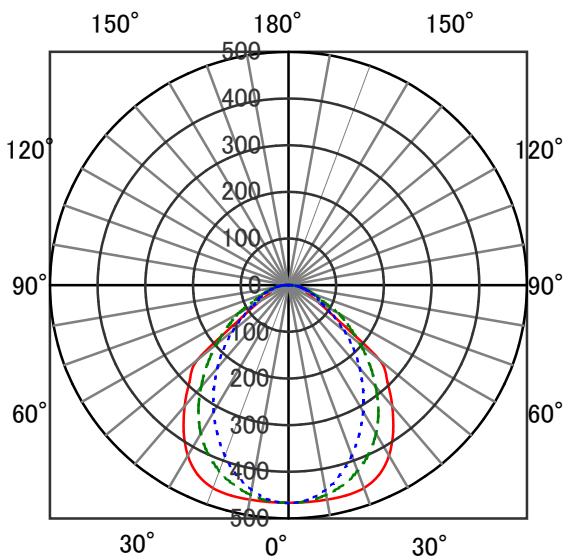

直射水平面照度

