


ECOHiLUX照明 配光データシート

意匠図


器具品名	ベース照明 スクエア	保守率	
器具品番	IRLDBL-138UK-W-SQ60-N	良	-
部品品名	-	中	-
部品品番	-	否	-
		器具効率	
器具光束	12420lm	上方向	0%
光源	LED	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

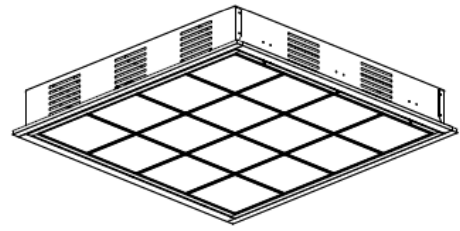

照明率表

		作業面照明率(×0.01)																						
反射率	天井 壁 床	80				70				50				30		0								
		70	50	30	10	70	50	30	10	50	30	10	30	10	0	0								
室 指 数	0.4	46	43	33	31	25	25	20	45	42	32	31	25	25	20	31	30	25	24	20	24	24	20	19
	0.6	64	59	49	47	41	39	34	62	57	49	46	40	39	34	47	45	40	39	34	39	38	34	32
	0.8	74	67	59	55	50	48	42	71	65	58	55	49	47	42	56	53	48	47	42	47	46	41	39
	1	82	74	68	63	59	56	50	80	72	67	63	58	55	50	64	61	57	55	50	55	54	49	47
	1.25	91	81	78	71	68	64	59	88	79	76	70	67	64	58	73	69	65	63	58	64	62	57	55
	1.5	96	84	83	76	74	69	63	93	83	81	75	73	68	63	78	73	71	67	63	68	66	62	60
	2	103	90	93	83	84	77	72	100	88	90	82	82	76	71	86	80	79	75	71	76	73	70	67
	2.5	109	94	99	88	92	82	78	105	92	96	87	89	82	78	91	84	86	80	77	82	79	76	73
	3	112	96	104	91	96	86	82	108	94	101	90	94	85	81	95	87	90	84	80	86	82	79	77
	4	116	99	110	95	104	91	88	112	97	106	94	101	90	87	100	91	96	88	86	91	87	84	82
5	119	101	113	97	108	94	91	115	99	110	96	105	93	91	103	94	99	91	89	94	90	88	85	
7	123	103	118	100	114	98	96	118	102	114	99	111	97	95	107	97	104	95	93	98	93	92	89	
10	125	105	122	103	119	101	99	120	103	117	101	115	100	98	110	99	108	98	96	101	96	95	92	

配光曲線

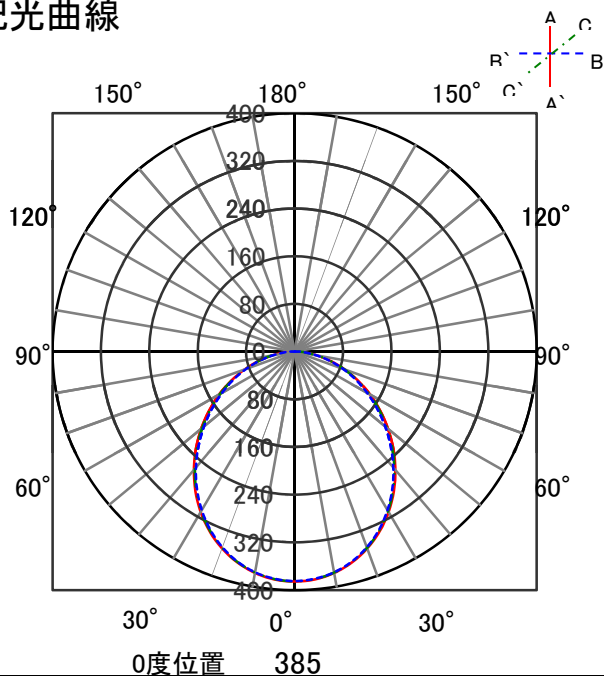

直射水平面照度

