

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDライン照明	保守率	
器具品番	LS090N-V1	良	-
部品品名	-	中	-
部品品番	-	否	-
器具光束	860lm	器具効率	
光源	LED	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%



照明率表

		作業面照明率(×0.01)																											
反射率	天井	80								70				50				30				0							
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0	
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室 指 数	0.4	46	43	32	31	25	24	20	44	42	32	31	25	24	20	31	30	24	24	20	24	23	20	18					
	0.6	63	58	49	46	40	39	34	61	57	48	46	40	39	33	46	45	39	38	33	38	38	33	31					
	0.8	73	66	59	55	49	47	41	71	65	57	54	48	47	41	55	53	47	46	41	46	45	41	39					
	1	82	74	68	63	58	55	49	79	72	66	62	57	55	49	64	60	56	54	49	54	53	48	46					
	1.25	90	80	77	71	68	63	58	87	79	75	70	67	63	58	72	68	65	62	57	63	61	57	54					
	1.5	95	84	83	75	74	68	63	92	82	81	74	72	68	62	77	72	70	67	62	68	65	61	59					
	2	103	90	92	82	83	76	71	99	88	90	81	82	75	71	85	79	78	74	70	76	73	69	66					
	2.5	108	93	99	87	91	82	77	104	92	96	86	89	81	77	91	84	85	80	76	81	78	75	72					
	3	112	96	103	90	96	85	81	108	94	100	89	93	85	81	94	87	89	83	80	85	81	78	76					
	4	116	99	109	94	103	90	87	112	97	105	93	100	89	86	99	91	95	88	85	90	86	83	81					
5	119	101	113	97	108	94	91	114	99	109	96	104	93	90	102	93	99	91	88	94	89	87	84						
7	122	103	118	100	113	97	95	118	101	114	99	110	96	94	106	96	103	94	92	98	92	91	88						
10	125	104	121	102	118	100	99	120	103	117	101	114	99	98	109	99	107	97	96	101	95	94	91						

配光曲線

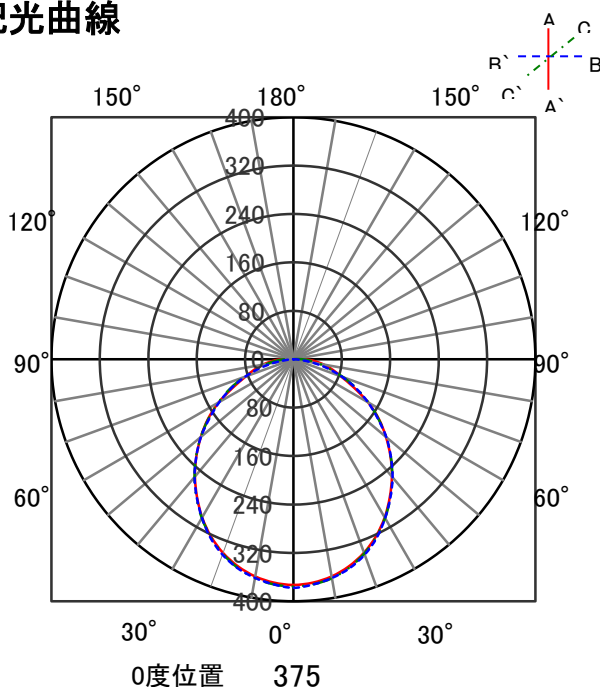

直射水平面照度

