


ECOHiLUX照明器具 配光データシート

器具品名	キャノピーライト	保守率	
器具品番	IRLDLCPY150N-N30	良	-
部品品名	-	中	-
部品品番	-	否	-
器具効率		器具効率	
器具光束	11500lm	上方向	0%
光源	LED	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

意匠図

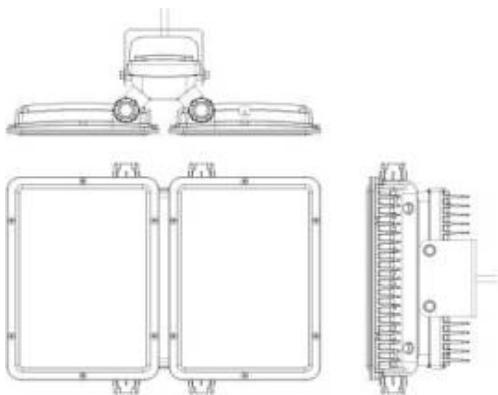


照明率表

作業面照明率(×0.01)

反射率	天井	80						70						50						30						0		
		壁		70		50		30		10		70		50		30		10		50		30		10		30		10
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	0
室 指 数	0.4	62	58	50	48	44	43	40	60	57	50	48	44	43	39	49	47	43	43	39	43	42	39	38				
	0.6	80	74	69	66	62	60	57	79	73	68	65	62	60	57	67	64	61	60	56	60	59	56	55				
	0.8	91	83	80	75	73	70	67	89	82	79	75	73	70	66	77	74	71	69	66	70	69	66	64				
	1	98	88	88	82	81	77	73	96	87	87	81	80	76	73	84	80	78	76	72	77	75	72	70				
	1.25	105	93	95	87	88	83	79	102	92	93	86	87	82	79	90	85	85	81	79	83	80	78	76				
	1.5	109	96	100	91	93	87	83	106	94	98	90	92	86	83	94	88	89	85	82	87	84	82	80				
	2	114	99	106	95	100	92	89	111	98	104	94	98	91	88	99	92	95	90	87	92	88	86	84				
	2.5	117	101	111	98	105	95	92	114	100	108	97	103	94	92	103	95	99	93	91	95	91	90	87				
	3	120	103	114	100	109	97	95	116	101	111	99	106	96	94	105	97	102	95	93	97	93	92	89				
	4	123	104	118	102	114	100	98	119	103	115	101	111	99	98	108	99	106	98	96	101	96	95	92				
	5	125	106	121	104	117	102	101	121	104	117	103	114	101	100	110	101	108	99	98	103	98	97	94				
	7	127	107	124	106	122	104	103	123	106	120	104	118	103	102	113	102	111	101	101	105	99	99	96				
	10	129	108	127	107	125	106	106	124	106	122	106	121	105	104	115	103	113	103	102	107	101	100	97				

配光曲線

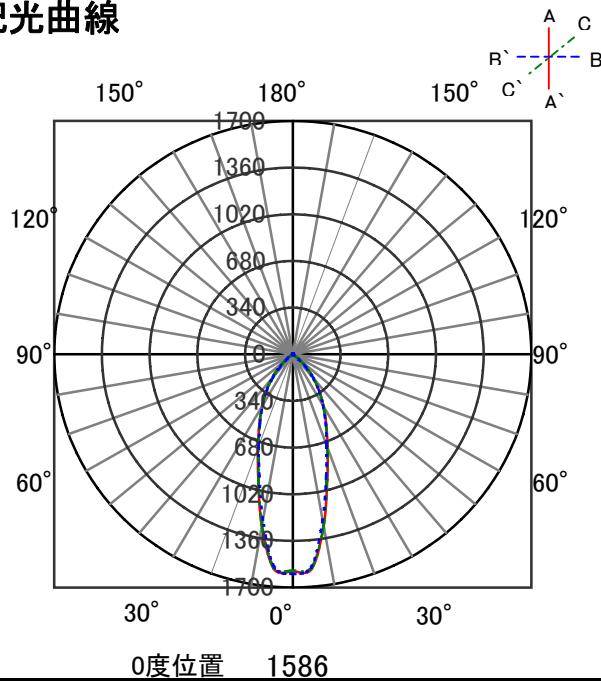

直射水平面照度

