


ECOHiLUX照明器具 配光データシート

意匠図

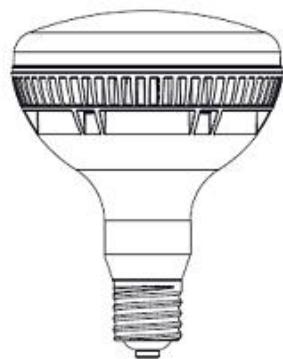


器具品名	バラストレス水銀灯300W代替	保守率	
		良	0.77
器具品番	-		中 0.72
部品品名	-		否 0.64
部品品番	-		器具効率
器具光束	-		上方向 4%
光源	LDR100-200V39N-H/E39-V4WH	下方向	96%
光源光束	4000lm	全方向	100%

照明率表

反射率	天井	作業面照明率(×0.01)												0	
		80				70				50					
		壁	70	50	30	10	70	50	30	10	50	30	10		
室 指 数	壁	30	10	30	10	30	10	30	10	30	10	30	10	0	
	0.4	43	41	30	29	22	22	17	42	40	29	28	22	17	
	0.6	60	55	45	43	36	35	30	58	54	44	42	36	35	
	0.8	70	64	55	51	45	43	37	67	62	53	50	44	43	
	1	79	71	64	59	54	51	45	76	69	62	58	53	50	
	1.25	87	77	73	67	63	59	53	83	75	71	65	62	58	
	1.5	92	81	79	71	69	64	58	88	79	76	70	67	63	
	2	100	87	88	79	79	72	66	96	85	85	77	77	71	
	2.5	105	91	95	84	86	78	73	101	89	92	82	84	77	
	3	109	93	99	87	92	82	77	104	91	96	86	89	81	
10	4	114	97	106	92	99	87	83	109	95	102	90	96	86	
	5	117	99	110	94	104	91	87	112	97	106	93	101	89	
	7	120	101	115	98	110	95	92	115	99	111	96	107	93	
	10	123	103	119	100	116	98	96	118	101	114	99	111	97	

配光曲線

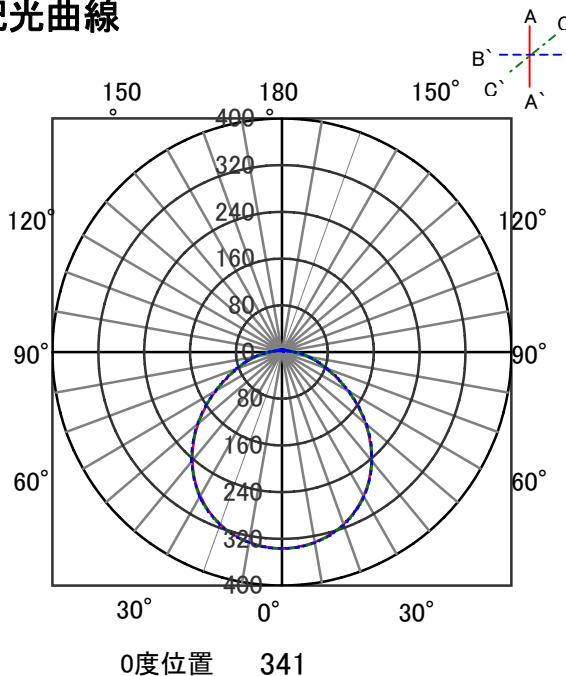

直射水平面照度

