


# ECOHiLUX照明器具 配光データシート

## 意匠図

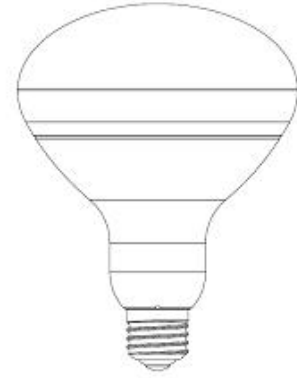


器具品名	バラストレス水銀灯160W代替	保守率	
器具品番	-	良	0.77
部品品名	-	中	0.72
部品品番	-	否	0.64
器具光束	-	器具効率	
光源	LDR1020V16L30V1/WH	上方向	4%
光源光束	1350lm	下方向	96%
		全方向	100%

## 照明率表

作業面照明率(×0.01)																													
反射率	天井	80								70								50				30		0					
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0	
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	30	10	10	30	10	10	30	10
室 指 数	0.4	43	41	30	29	22	22	17	42	40	29	28	22	22	17	28	27	21	21	17	21	21	17	21	21	17	15		
	0.6	60	55	45	43	36	35	30	58	54	44	42	36	35	29	42	41	35	34	29	34	33	29	34	33	29	26		
	0.8	70	64	55	51	45	43	37	67	62	53	50	44	43	37	51	49	43	41	36	41	40	36	41	40	36	33		
	1	79	71	64	59	54	51	45	76	69	62	58	53	50	44	59	56	51	49	44	49	48	43	49	48	43	40		
	1.25	87	77	73	67	63	59	53	83	75	71	65	62	58	52	67	63	59	57	51	57	55	51	57	55	51	48		
	1.5	92	81	79	71	69	64	58	88	79	76	70	67	63	57	72	68	64	61	56	62	60	55	62	60	55	52		
	2	100	87	88	79	79	72	66	96	85	85	77	77	71	66	80	74	73	69	64	70	67	63	70	67	63	60		
	2.5	105	91	95	84	86	78	73	101	89	92	82	84	77	72	86	79	80	75	70	76	73	69	76	73	69	65		
	3	109	93	99	87	92	82	77	104	91	96	86	89	81	76	90	83	84	78	74	80	76	73	80	76	73	69		
	4	114	97	106	92	99	87	83	109	95	102	90	96	86	82	95	87	90	83	80	85	81	78	85	81	78	74		
5	117	99	110	94	104	91	87	112	97	106	93	101	89	86	98	90	94	87	84	89	84	82	89	84	82	78			
7	120	101	115	98	110	95	92	115	99	111	96	107	93	91	103	93	99	91	88	93	88	86	93	88	86	82			
10	123	103	119	100	116	98	96	118	101	114	99	111	97	95	106	96	103	94	92	97	91	90	97	91	90	86			

## 配光曲線

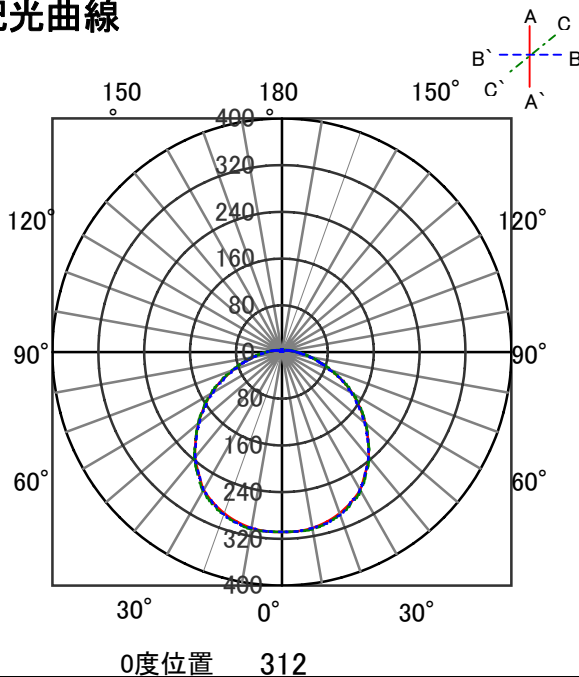

## 直射水平面照度

