


# ECOHiLUX照明器具 配光データシート

## 意匠図


器具品名	引掛け小型シーリングライト	保守率	
器具品番	SCL4N-MS-P	良	0.67
部品品名	-	中	0.63
部品品番	-	否	0.56
器具光束	450lm	器具効率	
光源	-	上方向	4%
光源光束	-	下方向	96%
		全方向	100%

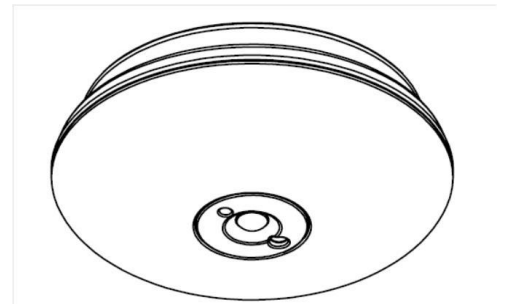

## 照明率表

		作業面照明率(×0.01)																								
反射率	天井	80								70				50				30		0						
		壁		70		50		30		10		70		50		30		10		30		10		0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	
室 指 数	0.4	43	41	30	29	22	22	17	42	39	29	28	22	21	17	28	27	21	21	17	21	20	16	15		
	0.6	59	55	44	42	35	34	29	57	53	43	41	35	34	29	41	40	34	33	28	33	32	28	25		
	0.8	69	63	54	51	44	42	36	67	61	53	50	43	42	36	50	48	42	41	35	40	39	35	32		
	1	78	70	63	58	52	50	44	75	68	61	57	51	49	43	58	55	49	48	42	48	46	42	39		
	1.25	86	76	72	66	61	58	51	82	74	69	64	60	57	51	66	62	58	55	50	55	54	49	46		
	1.5	91	80	77	70	67	63	56	87	78	75	69	66	62	56	71	66	63	60	55	60	58	53	50		
	2	99	86	87	78	77	71	65	95	84	84	76	75	69	64	78	73	71	67	63	68	65	61	57		
	2.5	104	90	94	83	85	76	71	100	88	90	81	82	75	70	84	78	78	73	69	74	71	67	63		
	3	108	92	98	86	90	80	75	103	90	95	84	87	79	74	88	81	82	77	73	77	74	71	67		
	4	113	96	105	90	97	86	81	108	94	101	89	94	84	80	93	85	88	82	78	83	79	76	72		
5	116	98	109	93	103	89	86	111	96	105	92	99	88	84	97	88	92	85	82	87	82	80	76			
7	119	100	114	97	109	94	91	114	98	109	95	105	92	89	101	92	98	89	87	91	86	84	80			
10	122	102	118	100	114	97	95	117	100	113	98	110	96	93	105	94	102	93	91	95	90	88	84			

## 配光曲線

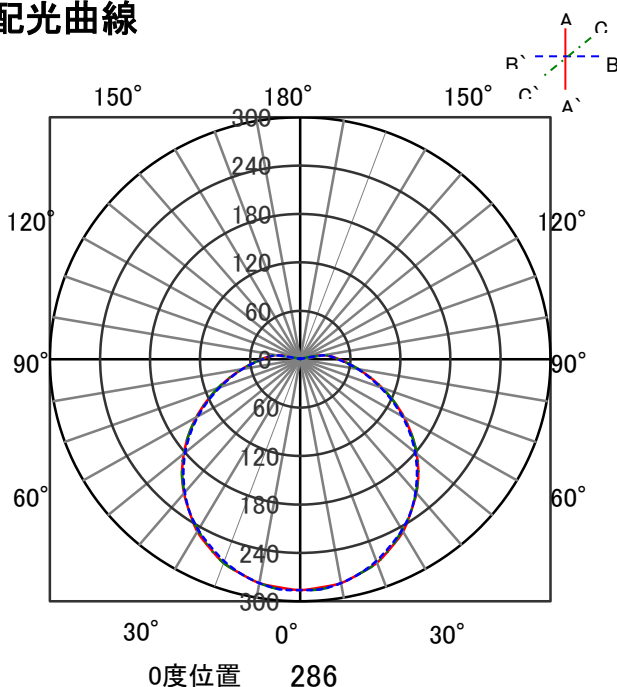

## 直射水平面照度

