


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	小型シーリングライト	保守率	
器具品番	SCL7N-E-P	良	0.67
部品品名	-	中	0.63
部品品番	-	否	0.56
器具光束	750lm	器具効率	
光源	LED	上方向	5%
光源光束	一体型器具のため、器具光束表示	下方向	95%
		全方向	100%

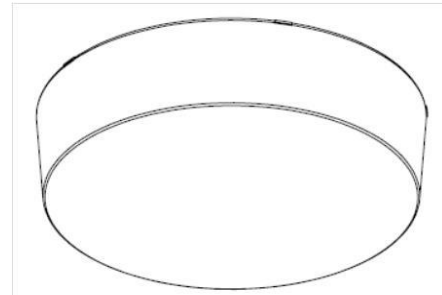

照明率表

		作業面照明率(×0.01)																						
反射率	天井	80						70				50			30		0							
	壁	70	50	30	10	70	50	30	10	50	30	10	30	10	0	0								
	床	30	10	30	10	30	10	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0		
室 指 数	0.4	43	40	29	28	22	21	17	42	39	29	28	21	21	17	27	27	21	20	16	20	20	16	14
	0.6	59	54	44	42	35	34	28	57	53	43	41	34	33	28	41	39	33	32	28	32	31	27	25
	0.8	69	63	54	50	44	42	36	66	61	52	49	43	41	35	49	47	41	40	35	40	39	34	31
	1	77	69	62	58	52	49	43	74	67	60	56	51	49	43	57	54	49	47	42	47	46	41	38
	1.25	86	78	71	65	61	57	51	82	74	69	64	60	56	50	65	61	57	55	49	54	53	48	45
	1.5	91	80	77	70	67	62	56	87	78	75	69	65	61	55	70	66	62	59	54	59	57	53	49
	2	99	86	87	77	77	70	64	94	84	84	76	75	69	64	78	72	71	67	62	67	65	60	57
	2.5	104	90	93	83	85	76	71	100	88	90	81	82	75	70	84	77	77	72	68	73	70	66	62
	3	108	92	98	86	90	80	75	103	90	94	84	87	79	74	88	81	82	76	72	77	74	70	66
	4	113	96	105	91	97	86	81	108	94	100	89	94	84	80	93	85	88	81	78	82	79	76	71
5	116	98	109	93	103	89	86	111	96	104	92	99	88	84	97	88	92	85	82	86	82	79	75	
7	119	100	114	97	109	94	91	114	98	109	95	105	92	89	101	91	97	89	87	91	86	84	79	
10	122	102	118	100	115	97	95	117	100	113	98	110	96	94	104	94	102	92	91	94	89	88	83	

配光曲線

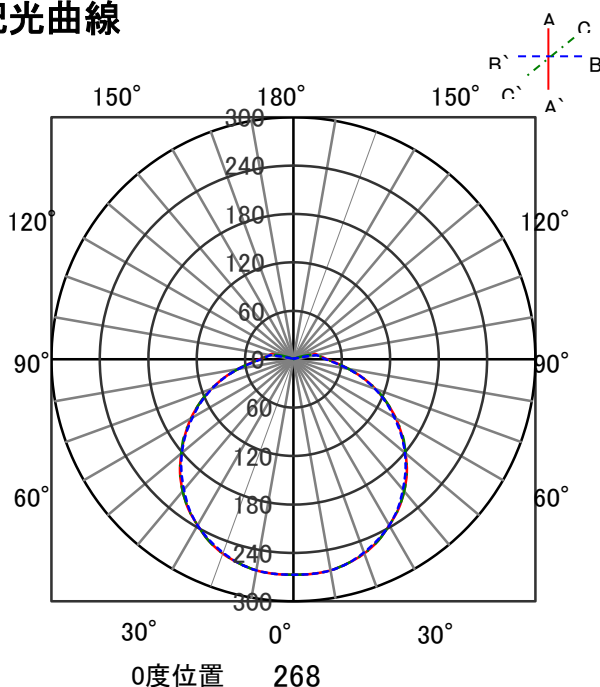

直射水平面照度

