


# ECOHiLUX照明器具 配光データシート

## 意匠図


器具品名	小型シーリングライト	保守率	
器具品番	SCL18L-E-P	良	0.67
部品品名	-	中	0.63
部品品番	-	否	0.56
器具光束	1750lm	器具効率	
光源	LED	上方向	5%
光源光束	一体型器具のため、器具光束表示	下方向	95%
		全方向	100%

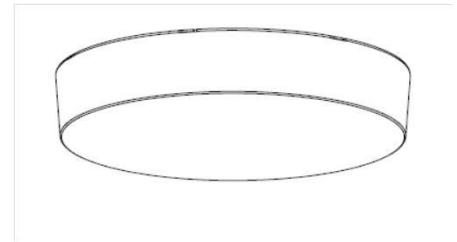

## 照明率表

		作業面照明率(×0.01)																										
反射率	天井	80								70				50				30		0								
	壁	70	10	30	10	30	10	10	30	70	10	30	10	30	10	10	50	10	30	10	10	30	10	10	30	10	10	0
室	床	30	10	30	10	30	10	10	30	40	29	28	22	22	17	28	27	21	21	17	21	20	16	15				
	0.4	44	41	30	29	22	22	17	42	40	29	28	22	22	17	28	27	21	21	17	21	20	16	15				
	0.6	60	55	45	43	36	35	29	58	53	44	42	35	34	29	42	40	34	33	28	33	32	28	26				
	0.8	70	63	54	51	45	43	37	67	61	53	50	44	42	36	50	48	42	41	36	41	40	35	32				
	1	78	70	63	59	53	50	44	75	68	61	57	52	50	44	58	55	50	48	43	48	47	42	39				
	1.25	86	77	72	66	62	58	52	83	75	70	65	61	57	52	66	62	58	56	50	56	54	49	46				
	1.5	92	81	78	71	68	63	57	88	78	76	69	67	62	57	71	67	63	60	55	60	59	54	51				
	2	99	87	88	78	78	71	66	95	84	85	77	76	70	65	79	73	72	68	63	68	66	62	58				
	2.5	105	91	94	83	86	77	72	100	88	91	82	83	76	71	85	78	79	74	69	74	71	68	64				
	3	108	93	99	87	91	81	76	104	91	95	85	88	80	75	89	82	83	77	73	78	75	71	67				
	4	113	96	105	91	99	87	82	108	94	101	89	95	85	81	94	86	89	82	79	83	80	77	72				
	5	116	98	110	94	104	90	87	111	96	105	92	100	89	85	97	89	93	86	83	87	83	80	76				
	7	120	101	115	98	110	95	92	115	99	110	96	106	93	90	102	92	98	90	88	92	87	85	80				
	10	123	103	119	100	115	98	96	117	101	114	99	111	96	94	105	95	102	93	91	95	90	88	84				

## 配光曲線

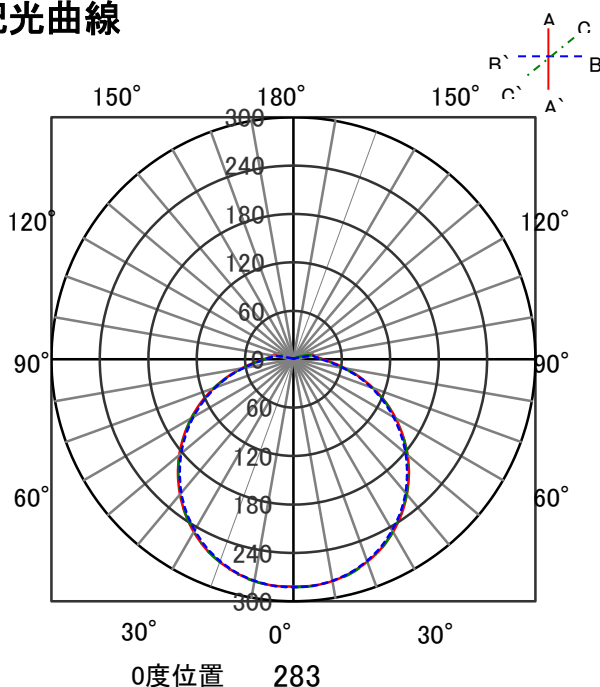

## 直射水平面照度

