


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	小型シーリングライト	保守率	
器具品番	SCL7NMS-E-P	良	0.67
部品品名	-	中	0.63
部品品番	-	否	0.56
器具光束	750lm	器具効率	
光源	LED	上方向	6%
光源光束	一体型器具のため、器具光束表示	下方向	94%
		全方向	100%

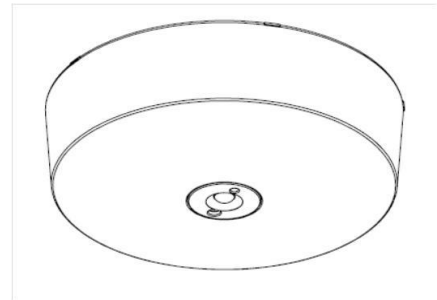

照明率表

		作業面照明率(×0.01)																												
反射率	天井	80								70								50				30				0				
	壁	70	10	30	10	30	10	30	10	70	10	30	10	30	10	30	10	50	30	10	30	10	30	10	30	10	30	10	0	0
室 指 数	0.4	43	40	29	28	21	21	16	41	39	28	27	21	21	16	27	26	20	20	16	20	19	15	13						
	0.6	58	54	43	41	34	33	28	56	52	42	40	34	33	27	40	38	32	32	27	31	31	26	24						
	0.8	68	62	53	50	43	41	35	65	60	51	48	42	40	34	48	46	40	39	34	39	38	33	30						
	1	77	69	61	57	51	49	42	73	67	60	56	50	48	42	56	53	48	46	41	46	44	40	36						
	1.25	85	75	70	65	60	56	50	81	73	68	63	59	55	49	64	60	56	53	48	53	52	47	43						
	1.5	90	79	76	69	66	61	55	86	77	74	68	64	60	54	69	65	61	58	53	58	56	51	48						
	2	98	85	86	77	76	69	63	94	83	83	75	74	68	63	77	71	70	66	61	66	63	59	55						
	2.5	103	89	93	82	84	75	70	99	87	89	80	81	74	69	83	76	76	71	67	72	69	65	61						
	3	107	92	97	85	89	79	74	102	89	93	83	86	78	73	87	80	81	75	71	76	72	69	64						
	4	112	95	104	90	97	85	81	107	93	100	88	93	83	79	92	84	87	80	77	81	77	74	70						
5	115	97	108	93	102	89	85	110	95	104	91	98	87	83	96	87	91	84	81	85	81	78	73							
7	119	100	114	97	108	93	90	113	98	109	95	104	91	89	100	91	96	88	86	89	85	83	78							
10	122	102	118	99	114	97	95	116	100	113	97	109	95	93	103	93	101	92	90	93	88	87	82							

配光曲線

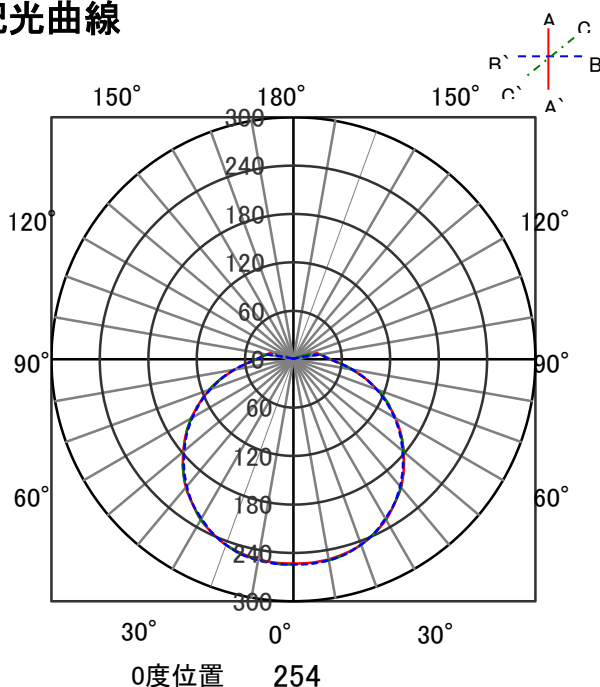

直射水平面照度

