


# ECOHiLUX照明器具 配光データシート

## 意匠図

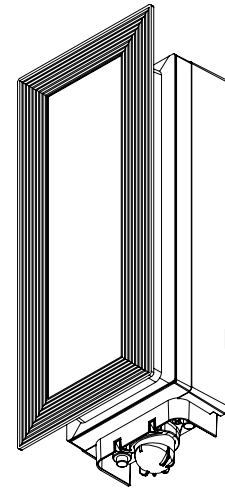


器具品名	縦型ポーチ灯	保守率	
器具品番	IRBR5L-VRPLB-MSBS	良	0.63
部品品名	-	中	0.60
部品品番	-	否	0.56
器具光束	440lm	器具効率	
光源	LED	上方向	17%
光源光束	一体型器具のため、器具光束表示	下方向	83%
		全方向	100%

## 照明率表

		作業面照明率(×0.01)																											
反射率	天井	80								70				50				30		0									
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0	
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室 指 数	0.4	42	40	29	28	22	21	17	40	38	28	27	21	21	16	26	25	20	19	15	18	18	15	12					
	0.6	57	53	43	41	34	33	27	54	50	41	39	33	32	27	38	36	31	30	25	29	28	24	21					
	0.8	67	61	52	49	42	40	34	63	58	50	47	41	39	33	46	44	38	37	32	35	35	30	26					
	1	75	67	60	56	50	47	41	71	64	57	54	48	46	40	53	50	45	43	38	42	41	36	32					
	1.25	83	73	68	63	58	55	49	78	70	65	61	56	53	47	60	56	52	50	45	48	47	43	38					
	1.5	88	77	74	67	64	60	53	83	74	71	65	62	58	52	64	60	57	54	49	53	51	47	41					
	2	95	83	83	75	74	67	62	90	80	79	72	71	65	60	72	67	65	61	57	60	58	54	48					
	2.5	101	87	90	80	81	73	68	95	84	86	77	78	71	66	77	71	71	67	62	65	62	59	53					
	3	104	89	95	83	86	77	72	98	86	90	80	83	75	70	81	75	75	70	66	69	66	62	56					
	4	109	93	101	87	94	83	78	103	89	96	84	89	80	76	86	79	81	75	72	74	70	68	60					
5	112	95	105	90	99	86	82	106	92	100	87	94	84	80	89	82	85	78	75	77	73	71	64						
7	116	97	111	94	106	91	88	109	94	105	91	100	88	85	94	85	90	82	80	82	77	75	68						
10	119	99	115	97	111	94	92	112	96	108	94	105	91	89	97	88	94	86	84	85	80	79	71						

## 配光曲線

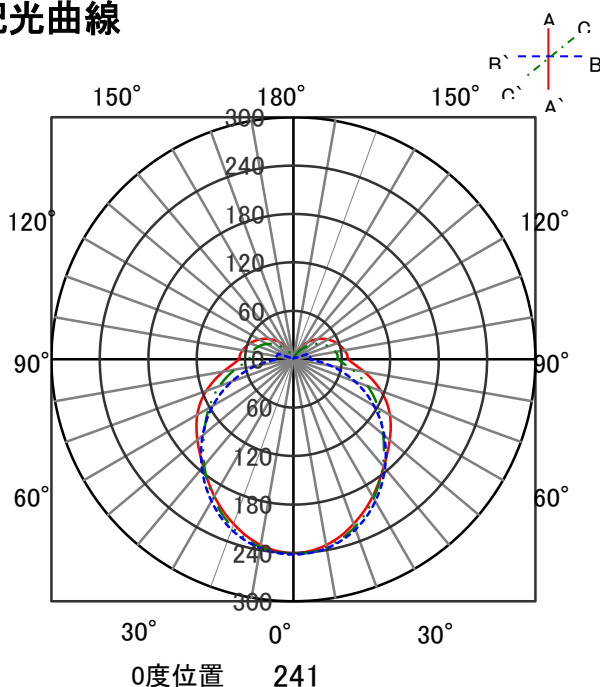

## 直射水平面照度

