


ECOHiLUX照明器具 配光データシート

意匠図

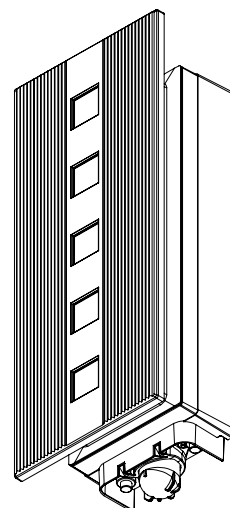


器具品名	縦型ポーチ灯	保守率	
器具品番	IRBR5N-VRSSCG-MSBS	良	0.63
部品品名	-	中	0.60
部品品番	-	否	0.56
器具効率			
器具光束	220lm	上方向	46%
光源	LED	下方向	54%
光源光束	一体型器具のため、器具光束表示	全方向	100%

照明率表

		作業面照明率(×0.01)															
反射率	天井	80								70							
	壁	70				50				30				10			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
室指数	0.4	38	36	25	24	18	18	13	35	33	23	22	17	16	12	19	19
	0.6	50	46	36	34	27	26	21	46	42	33	31	25	24	19	27	26
	0.8	59	53	44	41	34	32	26	53	49	40	38	31	30	24	33	31
	1	66	59	50	47	40	38	31	59	54	46	43	37	35	29	38	36
	1.25	72	64	58	53	47	44	37	65	59	52	49	43	41	35	43	40
	1.5	78	68	63	57	52	49	42	70	62	57	53	48	45	39	47	44
	2	85	74	72	64	61	56	49	76	68	65	59	56	52	46	53	49
	2.5	90	78	78	69	68	62	55	81	71	71	64	62	57	51	58	53
	3	94	80	83	73	74	66	60	84	74	75	67	67	61	55	61	56
	4	99	84	89	77	81	71	66	89	77	81	72	74	66	61	66	60
	5	102	86	94	81	87	75	71	92	80	85	75	79	70	66	69	63
	7	106	89	100	85	94	81	77	96	83	90	79	85	75	71	74	67
	10	110	92	104	88	100	85	82	99	85	95	82	91	79	76	77	70

配光曲線

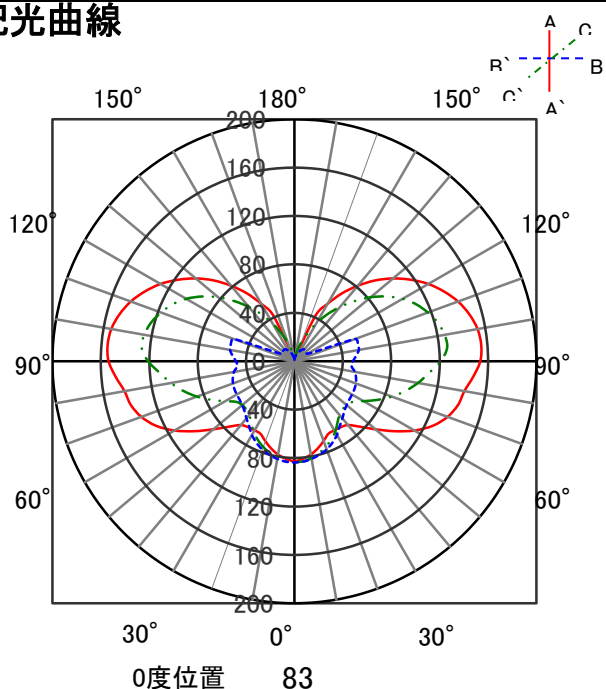

直射水平面照度

