


ECOHiLUX照明器具 配光データシート

意匠図

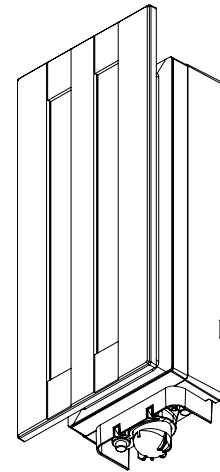


器具品名	縦型ポーチ灯	保守率	
器具品番	IRBR5L-VRDSB-MSBS	良	0.63
部品品名	-	中	0.60
部品品番	-	否	0.56
器具光束	290lm	器具効率	
光源	LED	上方向	30%
光源光束	一体型器具のため、器具光束表示	下方向	70%
		全方向	100%

照明率表

		作業面照明率(×0.01)																							
反射率	天井	80								70				50				30		0					
	壁	70		50		30		10		70		50		30		10		50		30		10		0	
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10
室 指 数	0.4	41	38	28	27	21	20	16	38	36	26	25	19	19	15	23	23	17	17	14	16	15	12	9	
	0.6	55	50	40	38	31	30	25	51	47	38	36	30	29	24	34	32	27	26	22	24	24	20	16	
	0.8	64	58	49	46	39	37	31	59	54	46	43	37	36	30	40	39	33	32	27	29	29	25	19	
	1	71	64	56	52	46	44	38	66	60	53	50	44	42	36	47	44	39	38	33	35	34	30	24	
	1.25	79	70	64	59	54	51	44	73	66	60	56	51	48	42	53	50	46	44	39	40	39	35	28	
	1.5	84	74	70	64	60	56	49	78	69	65	60	56	53	47	57	54	50	48	43	44	43	39	31	
	2	91	79	79	70	69	63	57	84	75	74	67	65	60	54	64	60	57	54	49	50	48	45	36	
	2.5	96	83	85	75	76	69	63	89	78	79	71	71	65	60	69	64	63	59	55	55	53	49	40	
	3	100	86	90	79	81	73	67	92	81	84	75	76	69	64	72	67	67	62	58	58	56	52	43	
	4	105	89	96	83	89	78	73	97	84	89	79	83	74	70	77	71	72	67	63	63	60	57	47	
5	108	91	101	86	94	82	78	100	86	93	82	88	78	74	81	74	76	70	67	66	63	60	50		
7	112	94	106	90	101	86	83	103	89	98	86	94	82	79	85	77	81	74	72	70	67	65	53		
10	115	96	110	93	106	90	88	106	91	102	89	99	86	84	88	80	86	78	76	74	70	68	57		

配光曲線

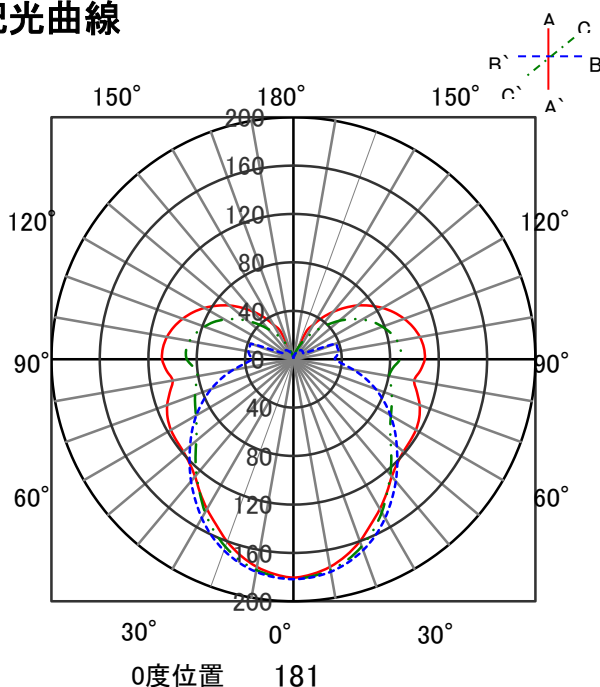

直射水平面照度

