


## ECOHiLUX 照明器具 配光データシート

## 意匠図

器具品名	LEDダウンライト COBシリーズ	保守率	
		良	0.69
器具品番	DL30L30-60C2W-D	中	
		否	0.67
部品品名	-	否	
		器具効率	
器具光束	2700lm	上方向	0%
		下方向	100%
光源	-	全方向	100%
光源光束	一体型器具のため、器具光束表示		

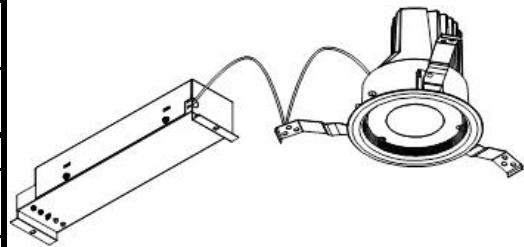


## 照度率表

## 作業面照度率(×0.01)

反射率	天井	80								70								50								0			
		壁		70		50		30		10		70		50		30		10		50		30		10		30		10	
		床		30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	30	10	30	10	30	10
室 指 数	0.4	59	55	47	45	41	40	36	58	54	47	45	40	40	36	46	44	40	39	36	40	39	36	35					
	0.6	80	74	69	65	62	60	56	78	73	68	65	61	60	56	67	64	61	59	56	60	59	56	54					
	0.8	88	80	76	71	69	66	62	86	78	75	71	68	66	62	73	70	67	65	61	66	64	61	60					
	1	96	86	85	79	77	74	70	93	85	83	78	77	73	69	81	77	75	72	69	74	72	69	67					
	1.25	103	92	94	86	87	81	78	101	91	92	85	86	81	78	89	84	80	77	82	79	77	75						
	1.5	106	94	97	88	90	84	80	104	93	95	87	89	83	80	92	86	87	82	79	84	81	79	77					
	2	112	98	104	93	98	89	86	109	96	102	92	96	89	86	97	90	93	87	85	90	86	84	82					
	2.5	116	100	109	97	104	94	91	113	99	107	96	102	93	90	102	94	98	92	89	94	90	89	86					
	3	119	102	112	99	107	96	93	115	100	110	98	105	95	93	104	96	100	94	92	96	92	91	88					
	4	122	103	117	101	112	99	97	118	102	113	100	110	98	96	107	98	104	96	95	100	95	94	91					
	5	124	105	120	103	116	101	99	120	103	116	102	113	100	99	109	100	107	98	97	102	97	96	93					
	7	126	106	123	105	120	103	102	122	105	119	104	117	102	101	112	102	110	101	100	104	99	98	95					
	10	128	107	126	106	124	105	104	123	106	121	105	120	104	103	114	103	112	102	101	106	100	100	97					

## 配光曲線

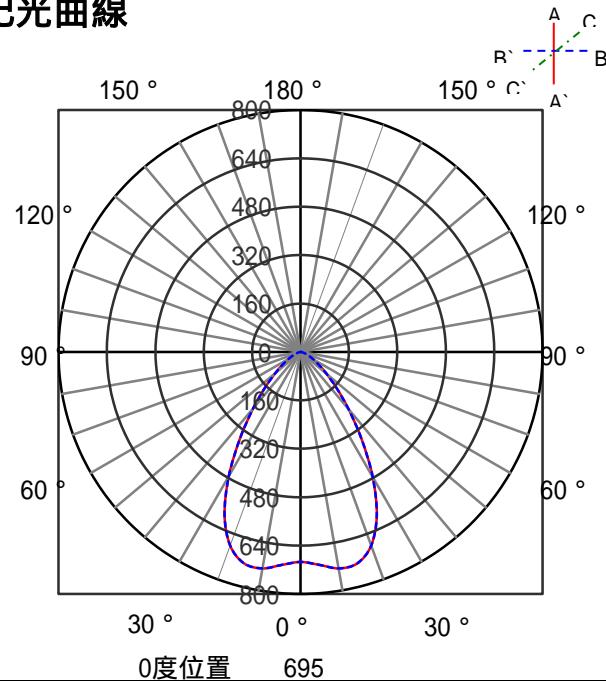

## 直射水平面照度

