


## ECOHiLUX 照明器具 配光データシート

## 意匠図


|      |                      |      |      |
|------|----------------------|------|------|
| 器具品名 | 直管用専用器具<br>トラフ型40形1灯 | 保守率  |      |
|      |                      | 良    | 0.81 |
| 器具品番 | IRLDL41TR-K          | 中    |      |
|      |                      | 否    | 0.77 |
| 部品品名 | -                    | 否    |      |
|      |                      | 器具効率 |      |
| 器具光束 | 1920lm               | 上方向  | 19%  |
|      |                      | 下方向  | 77%  |
| 光源   | LDGF40T-WW/15/20P    | 光源光束 |      |
|      |                      | 全方向  | 96%  |

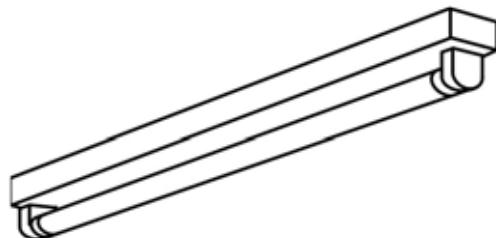


## 照明率表

| 反射率         | 天井   | 作業面照明率(×0.01) |    |     |    |     |    |    |     |    |     |    |     | 0  |    |    |    |    |    |    |    |    |    |    |
|-------------|------|---------------|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|----|----|----|----|----|----|----|----|----|
|             |      | 80            |    | 70  |    | 50  |    | 30 |     | 10 |     | 50 |     | 30 |    | 10 |    |    |    |    |    |    |    |    |
|             |      | 壁             | 70 | 50  | 30 | 10  | 70 | 50 | 30  | 10 | 30  | 10 | 30  | 10 | 30 | 10 | 0  |    |    |    |    |    |    |    |
| 室<br>指<br>数 | 床    | 30            | 10 | 30  | 10 | 30  | 10 | 30 | 10  | 30 | 10  | 30 | 10  | 30 | 10 | 30 | 10 |    |    |    |    |    |    |    |
|             | 0.4  | 41            | 38 | 27  | 26 | 20  | 20 | 15 | 39  | 36 | 26  | 25 | 19  | 19 | 15 | 24 | 23 | 18 | 18 | 14 | 16 | 16 | 13 | 10 |
|             | 0.6  | 55            | 51 | 40  | 38 | 31  | 30 | 25 | 52  | 48 | 39  | 37 | 30  | 29 | 24 | 35 | 34 | 28 | 27 | 23 | 26 | 25 | 21 | 18 |
|             | 0.8  | 65            | 59 | 49  | 46 | 39  | 38 | 32 | 61  | 56 | 47  | 44 | 38  | 36 | 31 | 43 | 41 | 35 | 34 | 29 | 32 | 31 | 27 | 23 |
|             | 1    | 73            | 65 | 57  | 53 | 47  | 45 | 38 | 68  | 62 | 55  | 51 | 45  | 43 | 37 | 49 | 47 | 42 | 40 | 35 | 38 | 37 | 33 | 28 |
|             | 1.25 | 80            | 71 | 66  | 60 | 55  | 52 | 45 | 75  | 68 | 62  | 58 | 53  | 50 | 44 | 56 | 53 | 49 | 47 | 41 | 45 | 43 | 39 | 33 |
|             | 1.5  | 85            | 75 | 72  | 65 | 61  | 57 | 50 | 80  | 72 | 68  | 62 | 59  | 55 | 49 | 61 | 57 | 54 | 51 | 46 | 49 | 47 | 43 | 37 |
|             | 2    | 93            | 81 | 81  | 72 | 71  | 65 | 58 | 87  | 77 | 76  | 69 | 68  | 62 | 57 | 68 | 64 | 61 | 58 | 53 | 56 | 54 | 50 | 43 |
|             | 2.5  | 98            | 85 | 87  | 77 | 78  | 70 | 65 | 92  | 81 | 83  | 74 | 74  | 68 | 63 | 74 | 68 | 67 | 63 | 59 | 61 | 59 | 55 | 48 |
|             | 3    | 102           | 88 | 92  | 81 | 83  | 74 | 69 | 96  | 84 | 87  | 77 | 79  | 72 | 67 | 78 | 71 | 72 | 67 | 63 | 65 | 62 | 58 | 51 |
|             | 4    | 107           | 91 | 99  | 85 | 91  | 80 | 75 | 100 | 87 | 93  | 82 | 86  | 77 | 73 | 83 | 76 | 78 | 72 | 68 | 70 | 67 | 64 | 56 |
|             | 5    | 110           | 93 | 103 | 88 | 96  | 84 | 80 | 103 | 90 | 97  | 85 | 91  | 81 | 77 | 86 | 79 | 82 | 75 | 72 | 73 | 70 | 67 | 59 |
|             | 7    | 114           | 96 | 108 | 92 | 103 | 89 | 85 | 107 | 92 | 102 | 89 | 97  | 85 | 82 | 91 | 82 | 87 | 79 | 77 | 78 | 74 | 72 | 63 |
|             | 10   | 117           | 98 | 113 | 95 | 109 | 92 | 90 | 110 | 94 | 106 | 92 | 103 | 89 | 87 | 94 | 85 | 91 | 83 | 81 | 82 | 77 | 75 | 67 |

## 配光曲線

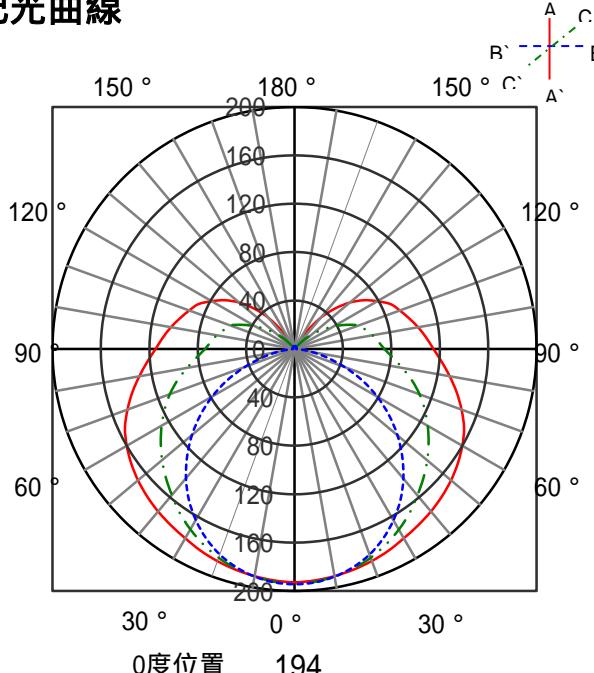


## 直射水平面照度

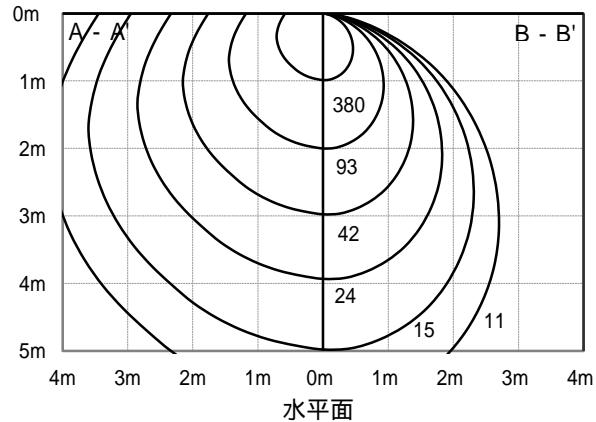

## ECO HiLUX 照明器具 配光データシート

|      |                      |      |      |
|------|----------------------|------|------|
| 器具品名 | 直管用専用器具<br>トラフ型40形2灯 | 保守率  |      |
|      |                      | 良    | 0.81 |
| 器具品番 | IRLDL42TR-K          | 中    | 0.77 |
| 部品品名 | -                    | 否    | 0.67 |
| 部品品番 | -                    | 器具効率 |      |
| 器具光束 | 3680lm               | 上方向  | 15%  |
| 光源   | LDGF40T·WW/15/20P    | 下方向  | 77%  |
| 光源光束 | 2000lm × 2           | 全方向  | 92%  |

## 意匠圖

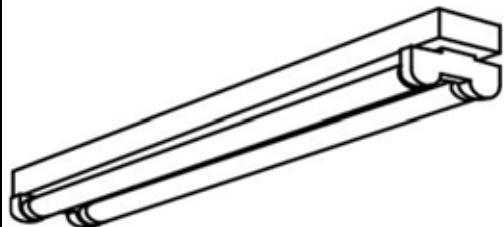


## 照明率表


### 作業面照度率(×0.01)

| 反射率 | 天井   | 80  |     |     |     |     |    | 70 |     |     |     |    |     | 50 |    |     |    |     |    | 30 |    |    | 0  |    |
|-----|------|-----|-----|-----|-----|-----|----|----|-----|-----|-----|----|-----|----|----|-----|----|-----|----|----|----|----|----|----|
|     | 壁    | 70  |     | 50  |     | 30  |    | 10 |     | 70  |     | 50 |     | 30 |    | 10  |    | 50  |    | 30 |    | 10 |    | 0  |
|     | 床    | 30  | 10  | 30  | 10  | 30  | 10 | 10 | 30  | 10  | 30  | 10 | 30  | 10 | 10 | 30  | 10 | 30  | 10 | 10 | 30 | 10 | 10 | 0  |
| 室指数 | 0.4  | 44  | 41  | 30  | 29  | 22  | 21 | 17 | 42  | 39  | 28  | 28 | 21  | 21 | 16 | 26  | 26 | 20  | 19 | 15 | 18 | 18 | 14 | 12 |
|     | 0.6  | 59  | 55  | 44  | 42  | 34  | 33 | 27 | 56  | 52  | 42  | 40 | 33  | 32 | 27 | 39  | 37 | 31  | 30 | 25 | 29 | 29 | 24 | 21 |
|     | 0.8  | 70  | 63  | 53  | 50  | 43  | 41 | 35 | 66  | 60  | 51  | 48 | 41  | 40 | 34 | 47  | 45 | 39  | 38 | 32 | 36 | 35 | 30 | 26 |
|     | 1    | 78  | 70  | 62  | 58  | 51  | 49 | 42 | 74  | 67  | 59  | 56 | 49  | 47 | 41 | 54  | 52 | 46  | 44 | 39 | 43 | 42 | 37 | 32 |
|     | 1.25 | 86  | 77  | 71  | 65  | 60  | 56 | 50 | 81  | 73  | 68  | 63 | 58  | 55 | 48 | 62  | 58 | 54  | 52 | 46 | 50 | 48 | 44 | 39 |
|     | 1.5  | 92  | 81  | 77  | 70  | 67  | 62 | 55 | 87  | 77  | 74  | 68 | 64  | 60 | 54 | 67  | 63 | 59  | 56 | 51 | 55 | 53 | 48 | 43 |
|     | 2    | 100 | 87  | 87  | 78  | 77  | 70 | 64 | 94  | 83  | 83  | 75 | 74  | 68 | 62 | 75  | 70 | 68  | 64 | 59 | 62 | 60 | 56 | 50 |
|     | 2.5  | 106 | 91  | 94  | 83  | 85  | 76 | 71 | 100 | 88  | 90  | 80 | 81  | 74 | 69 | 81  | 75 | 74  | 70 | 65 | 68 | 65 | 61 | 55 |
|     | 3    | 110 | 94  | 99  | 87  | 90  | 81 | 75 | 103 | 90  | 94  | 84 | 86  | 78 | 73 | 85  | 78 | 79  | 74 | 69 | 72 | 69 | 65 | 59 |
|     | 4    | 115 | 98  | 106 | 92  | 99  | 87 | 82 | 108 | 94  | 101 | 89 | 94  | 84 | 80 | 91  | 83 | 85  | 79 | 75 | 78 | 74 | 71 | 64 |
|     | 5    | 118 | 100 | 111 | 95  | 104 | 91 | 87 | 111 | 96  | 105 | 92 | 99  | 88 | 84 | 94  | 86 | 90  | 83 | 79 | 81 | 77 | 75 | 67 |
|     | 7    | 122 | 103 | 116 | 99  | 111 | 96 | 92 | 115 | 99  | 110 | 96 | 106 | 93 | 90 | 99  | 90 | 95  | 87 | 85 | 86 | 82 | 80 | 72 |
|     | 10   | 125 | 105 | 121 | 102 | 117 | 99 | 97 | 118 | 101 | 114 | 99 | 111 | 96 | 94 | 103 | 93 | 100 | 91 | 89 | 90 | 85 | 83 | 75 |

## 配光曲線

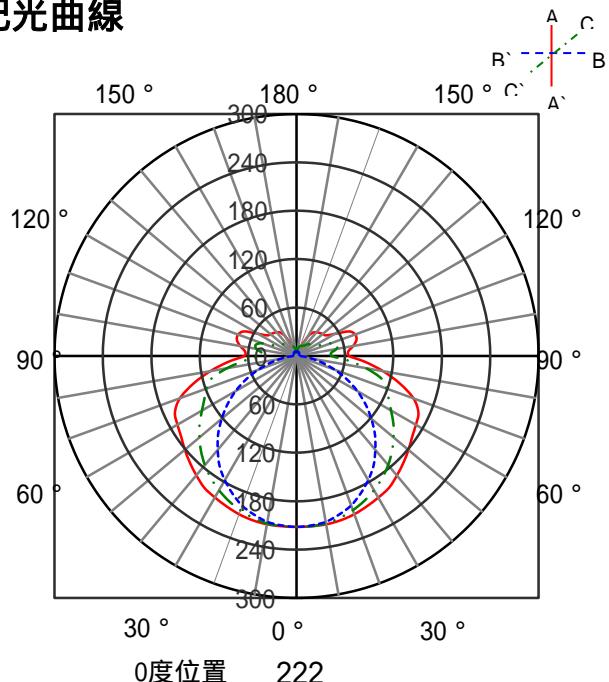


## 直射水平面照度

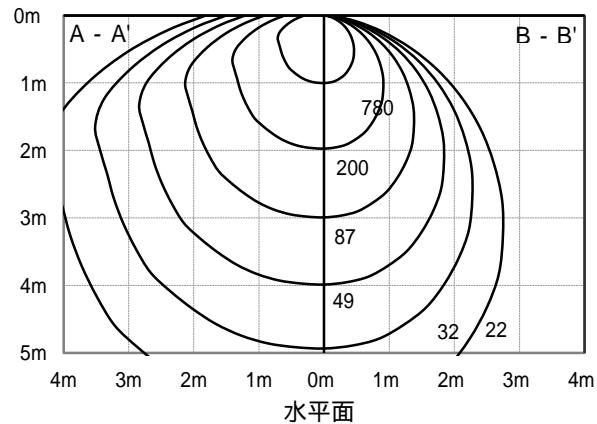

## ECOHiLUX 照明器具 配光データシート

## 意匠図

|      |                      |      |      |
|------|----------------------|------|------|
| 器具品名 | 直管用専用器具<br>逆富士型40形1灯 | 保守率  |      |
|      |                      | 良    | 0.81 |
| 器具品番 | IRLDL41FJ-K          | 中    |      |
|      |                      | 否    | 0.77 |
| 部品品名 | -                    | 否    |      |
|      |                      | 器具効率 |      |
| 器具光束 | 2000lm               | 上方向  | 22%  |
|      |                      | 下方向  | 78%  |
| 光源   | LDGF40T-WW/15/20P    | 全方向  | 100% |
|      |                      |      |      |

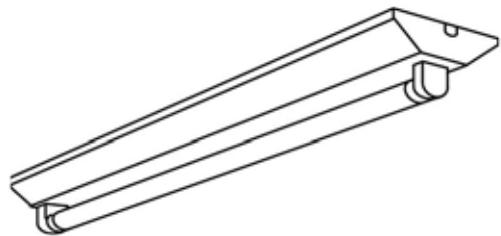


## 照明率表


## 作業面照明率(×0.01)

| 反射率         | 天井   | 80  |     |     |    |     |    |    |     |    |     |    |     | 70 |    |    |    |    |    |    |    |    |    |    |    | 50 |    |    |    |    |    |    |    |    |    |    |   | 0 |  |
|-------------|------|-----|-----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|--|
|             |      | 壁   |     | 70  |    | 50  |    | 30 |     | 10 |     | 70 |     | 50 |    | 30 |    | 10 |    | 70 |    | 50 |    | 30 |    | 10 |    | 30 |    | 10 |    | 30 |    | 10 |    | 0  |   |   |  |
|             |      | 床   | 30  | 10  | 30 | 10  | 30 | 10 | 10  | 30 | 10  | 30 | 10  | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 0 |   |  |
| 室<br>指<br>数 | 0.4  | 42  | 40  | 28  | 28 | 21  | 20 | 16 | 40  | 38 | 27  | 26 | 20  | 20 | 15 | 25 | 24 | 18 | 18 | 14 | 17 | 16 | 13 | 10 |    |    |    |    |    |    |    |    |    |    |    |    |   |   |  |
|             | 0.6  | 57  | 53  | 42  | 40 | 32  | 31 | 26 | 54  | 50 | 40  | 38 | 31  | 30 | 25 | 36 | 35 | 29 | 28 | 23 | 26 | 26 | 21 | 18 |    |    |    |    |    |    |    |    |    |    |    |    |   |   |  |
|             | 0.8  | 67  | 61  | 51  | 48 | 41  | 39 | 33 | 63  | 58 | 49  | 46 | 39  | 38 | 32 | 44 | 42 | 36 | 35 | 29 | 33 | 32 | 27 | 23 |    |    |    |    |    |    |    |    |    |    |    |    |   |   |  |
|             | 1    | 76  | 68  | 60  | 55 | 49  | 46 | 40 | 71  | 64 | 57  | 53 | 47  | 45 | 38 | 51 | 48 | 43 | 41 | 36 | 39 | 38 | 33 | 28 |    |    |    |    |    |    |    |    |    |    |    |    |   |   |  |
|             | 1.25 | 84  | 74  | 68  | 63 | 57  | 54 | 47 | 78  | 71 | 65  | 60 | 55  | 52 | 45 | 58 | 55 | 50 | 48 | 42 | 45 | 44 | 39 | 33 |    |    |    |    |    |    |    |    |    |    |    |    |   |   |  |
|             | 1.5  | 89  | 79  | 74  | 68 | 64  | 59 | 52 | 83  | 75 | 70  | 65 | 61  | 57 | 50 | 63 | 59 | 55 | 52 | 47 | 50 | 48 | 44 | 37 |    |    |    |    |    |    |    |    |    |    |    |    |   |   |  |
|             | 2    | 97  | 85  | 84  | 75 | 74  | 67 | 61 | 91  | 80 | 79  | 72 | 70  | 65 | 59 | 71 | 66 | 63 | 60 | 55 | 57 | 55 | 51 | 43 |    |    |    |    |    |    |    |    |    |    |    |    |   |   |  |
|             | 2.5  | 103 | 89  | 91  | 80 | 81  | 73 | 67 | 96  | 85 | 86  | 77 | 77  | 71 | 65 | 76 | 70 | 69 | 65 | 60 | 62 | 60 | 56 | 48 |    |    |    |    |    |    |    |    |    |    |    |    |   |   |  |
|             | 3    | 107 | 91  | 96  | 84 | 87  | 78 | 72 | 100 | 87 | 90  | 81 | 82  | 75 | 69 | 80 | 74 | 74 | 69 | 64 | 66 | 63 | 60 | 51 |    |    |    |    |    |    |    |    |    |    |    |    |   |   |  |
|             | 4    | 112 | 95  | 103 | 89 | 95  | 83 | 78 | 105 | 91 | 97  | 85 | 90  | 80 | 76 | 86 | 78 | 80 | 74 | 70 | 72 | 68 | 65 | 56 |    |    |    |    |    |    |    |    |    |    |    |    |   |   |  |
|             | 5    | 115 | 98  | 107 | 92 | 101 | 87 | 83 | 108 | 93 | 101 | 89 | 95  | 84 | 80 | 89 | 81 | 85 | 78 | 74 | 75 | 72 | 69 | 60 |    |    |    |    |    |    |    |    |    |    |    |    |   |   |  |
|             | 7    | 119 | 100 | 113 | 96 | 108 | 92 | 89 | 112 | 96 | 106 | 92 | 101 | 89 | 86 | 94 | 85 | 90 | 82 | 79 | 80 | 76 | 73 | 64 |    |    |    |    |    |    |    |    |    |    |    |    |   |   |  |
|             | 10   | 123 | 103 | 118 | 99 | 114 | 97 | 94 | 115 | 98 | 111 | 96 | 107 | 93 | 90 | 97 | 88 | 95 | 86 | 84 | 84 | 79 | 77 | 68 |    |    |    |    |    |    |    |    |    |    |    |    |   |   |  |

## 配光曲線

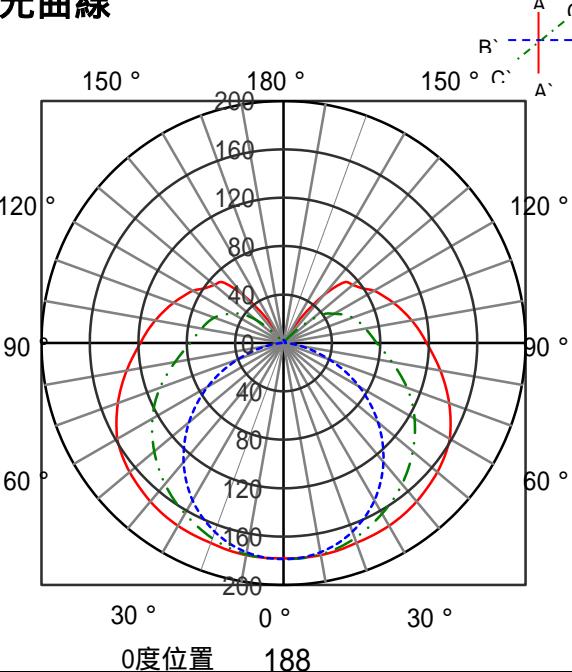


## 直射水平面照度

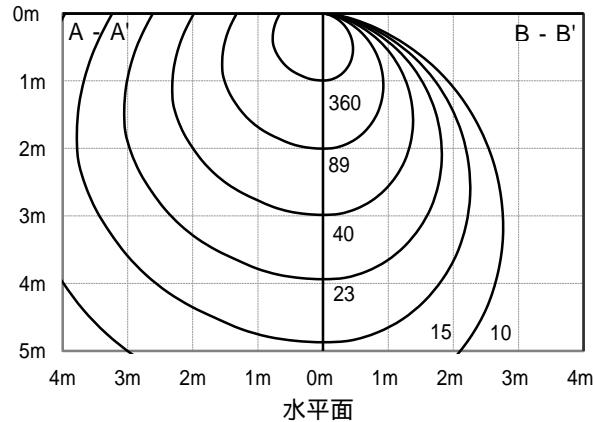

## ECOHiLUX 照明器具 配光データシート

## 意匠図

|      |                       |      |      |
|------|-----------------------|------|------|
| 器具品名 | 直管用専用器具<br>逆富士型40形2灯用 | 保守率  |      |
|      |                       | 良    | 0.81 |
| 器具品番 | IRLDL42FJ-K           | 中    |      |
|      |                       | 否    | 0.77 |
| 部品品名 | -                     | 否    |      |
|      |                       | 器具効率 |      |
| 器具光束 | 3714lm                | 上方向  | 13%  |
|      |                       | 下方向  | 80%  |
| 光源   | LDGF40T-WW/15/20P     | 全方向  | 93%  |
|      |                       |      |      |

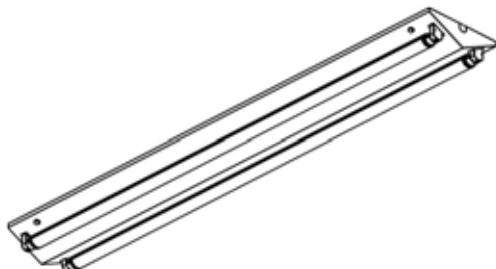


## 照度率表


## 作業面照度率(×0.01)

| 反射率         | 天井   | 80  |     |     |     |     | 70 |    |     |     |     | 50 |     |    |    |     | 30 |    |    |    |    |    |    |    |
|-------------|------|-----|-----|-----|-----|-----|----|----|-----|-----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|
|             |      | 壁   |     | 70  | 50  | 30  | 10 | 70 |     | 50  | 30  | 10 | 50  |    | 30 | 10  | 30 |    | 10 | 0  |    |    |    |    |
|             |      | 床   |     | 30  | 10  | 30  | 10 | 30 | 10  | 30  | 10  | 10 | 30  | 10 | 30 | 10  | 30 | 10 | 30 | 10 | 0  |    |    |    |
| 室<br>指<br>数 | 0.4  | 43  | 40  | 29  | 28  | 21  | 21 | 16 | 41  | 39  | 28  | 27 | 21  | 20 | 16 | 26  | 25 | 19 | 19 | 15 | 18 | 14 | 12 |    |
|             | 0.6  | 58  | 54  | 43  | 41  | 33  | 32 | 27 | 55  | 51  | 41  | 39 | 33  | 32 | 26 | 38  | 37 | 31 | 30 | 25 | 29 | 28 | 24 | 21 |
|             | 0.8  | 68  | 62  | 52  | 49  | 42  | 40 | 34 | 65  | 59  | 50  | 47 | 41  | 39 | 33 | 46  | 44 | 38 | 37 | 32 | 36 | 35 | 30 | 26 |
|             | 1    | 77  | 69  | 61  | 56  | 50  | 48 | 41 | 73  | 66  | 58  | 55 | 49  | 46 | 40 | 54  | 51 | 45 | 44 | 38 | 43 | 41 | 37 | 32 |
|             | 1.25 | 85  | 75  | 70  | 64  | 59  | 55 | 49 | 80  | 72  | 67  | 62 | 57  | 54 | 48 | 61  | 58 | 53 | 51 | 46 | 50 | 48 | 43 | 39 |
|             | 1.5  | 90  | 79  | 76  | 69  | 65  | 61 | 54 | 85  | 76  | 73  | 67 | 63  | 59 | 53 | 66  | 62 | 58 | 56 | 50 | 54 | 53 | 48 | 43 |
|             | 2    | 98  | 85  | 85  | 76  | 75  | 69 | 62 | 93  | 82  | 81  | 74 | 72  | 67 | 61 | 74  | 69 | 67 | 63 | 58 | 62 | 60 | 55 | 50 |
|             | 2.5  | 104 | 90  | 92  | 82  | 83  | 75 | 69 | 98  | 86  | 88  | 79 | 80  | 73 | 67 | 80  | 74 | 73 | 69 | 64 | 68 | 65 | 61 | 55 |
|             | 3    | 108 | 92  | 97  | 85  | 89  | 79 | 74 | 102 | 89  | 93  | 83 | 85  | 77 | 72 | 84  | 77 | 78 | 73 | 68 | 72 | 69 | 65 | 59 |
|             | 4    | 113 | 96  | 104 | 90  | 96  | 85 | 80 | 106 | 93  | 99  | 87 | 92  | 83 | 78 | 90  | 82 | 84 | 78 | 74 | 77 | 74 | 71 | 64 |
|             | 5    | 116 | 98  | 109 | 93  | 102 | 89 | 85 | 110 | 95  | 103 | 90 | 97  | 86 | 82 | 93  | 85 | 89 | 82 | 78 | 81 | 77 | 74 | 68 |
|             | 7    | 120 | 101 | 114 | 97  | 109 | 94 | 90 | 113 | 98  | 108 | 94 | 104 | 91 | 88 | 98  | 89 | 94 | 86 | 83 | 86 | 81 | 79 | 72 |
|             | 10   | 123 | 103 | 119 | 100 | 115 | 97 | 95 | 116 | 100 | 113 | 97 | 109 | 95 | 92 | 101 | 92 | 99 | 90 | 88 | 90 | 85 | 83 | 76 |

## 配光曲線

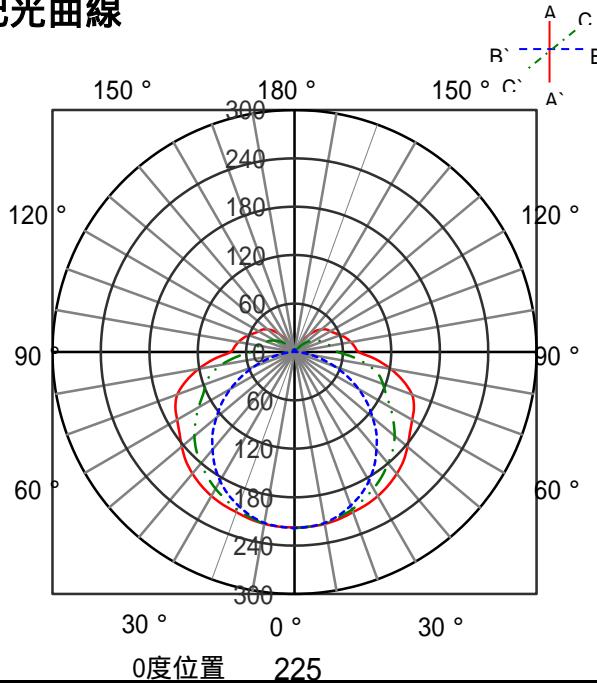

## 直射水平面照度

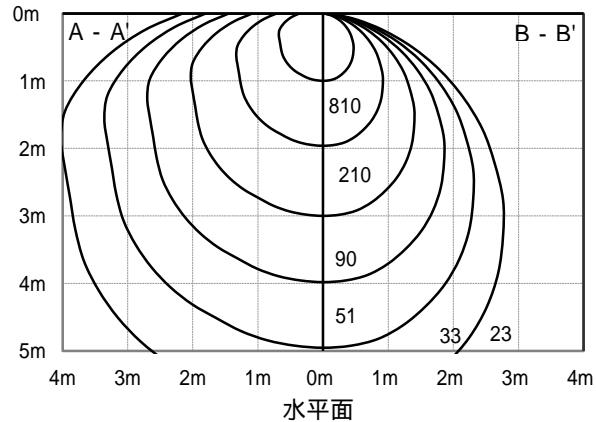

## ECOHiLUX 照明器具 配光データシート

|      |                         |      |      |
|------|-------------------------|------|------|
| 器具品名 | 直管用専用器具<br>直付下面開放型40形1灯 | 保守率  |      |
|      |                         | 良    | 0.81 |
| 器具品番 | IRLDL41CL-K             | 中    |      |
|      |                         | 否    | 0.77 |
| 部品品名 | -                       | 否    |      |
|      |                         | 器具効率 |      |
| 器具光束 | 1770lm                  | 上方向  | -    |
|      |                         | 下方向  | 89%  |
| 光源   | LDGF40T-WW/15/20P       | 全方向  | 89%  |
|      |                         |      |      |
| 光源光束 | 2000lm × 1              |      |      |


## 意匠図




## 照度率表

| 反射率         | 天井   | 作業面照度率(×0.01) |     |     |     |     |     |     |     |     |     |     |     |     |    | 0   |     |     |    |    |     |    |    |    |
|-------------|------|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|----|----|-----|----|----|----|
|             |      | 80            |     | 70  |     | 50  |     | 30  |     | 10  |     | 50  |     | 30  |    |     |     |     |    |    |     |    |    |    |
|             |      | 壁             | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 30  | 10  | 30  | 10  | 30 | 10  |     |     |    |    |     |    |    |    |
| 室<br>指<br>数 | 床    | 30            | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10 | 0   |     |     |    |    |     |    |    |    |
|             | 0.4  | 44            | 42  | 30  | 29  | 23  | 22  | 18  | 43  | 41  | 30  | 29  | 23  | 22  | 18 | 22  | 21  | 17  | 16 |    |     |    |    |    |
|             | 0.6  | 61            | 56  | 46  | 44  | 37  | 36  | 30  | 59  | 55  | 45  | 43  | 36  | 35  | 30 | 43  | 42  | 35  | 35 | 34 | 29  | 27 |    |    |
|             | 0.8  | 71            | 65  | 56  | 52  | 46  | 44  | 38  | 69  | 63  | 54  | 51  | 45  | 43  | 38 | 52  | 50  | 44  | 43 | 37 | 43  | 42 | 37 | 34 |
|             | 1    | 80            | 72  | 65  | 60  | 55  | 52  | 46  | 77  | 70  | 63  | 59  | 54  | 51  | 45 | 60  | 57  | 52  | 50 | 45 | 51  | 49 | 44 | 42 |
|             | 1.25 | 88            | 79  | 74  | 68  | 64  | 60  | 54  | 85  | 77  | 72  | 67  | 63  | 60  | 54 | 69  | 65  | 61  | 58 | 53 | 59  | 57 | 53 | 50 |
|             | 1.5  | 94            | 83  | 80  | 73  | 70  | 65  | 59  | 90  | 81  | 78  | 72  | 69  | 65  | 59 | 74  | 70  | 67  | 63 | 58 | 64  | 62 | 58 | 55 |
|             | 2    | 102           | 89  | 90  | 81  | 81  | 74  | 68  | 98  | 87  | 88  | 79  | 79  | 73  | 68 | 83  | 77  | 76  | 72 | 67 | 73  | 70 | 66 | 63 |
|             | 2.5  | 108           | 93  | 97  | 86  | 89  | 80  | 75  | 104 | 91  | 94  | 85  | 87  | 79  | 75 | 89  | 82  | 83  | 78 | 74 | 79  | 76 | 72 | 70 |
|             | 3    | 111           | 96  | 102 | 90  | 95  | 84  | 80  | 107 | 94  | 99  | 88  | 92  | 83  | 79 | 93  | 86  | 88  | 82 | 78 | 83  | 80 | 77 | 74 |
|             | 4    | 116           | 99  | 109 | 94  | 102 | 90  | 86  | 112 | 97  | 105 | 93  | 99  | 89  | 85 | 99  | 90  | 94  | 87 | 84 | 89  | 85 | 83 | 79 |
|             | 5    | 119           | 101 | 113 | 97  | 108 | 94  | 91  | 115 | 99  | 109 | 96  | 104 | 93  | 90 | 102 | 93  | 99  | 91 | 88 | 93  | 89 | 86 | 83 |
|             | 7    | 123           | 104 | 118 | 101 | 114 | 98  | 96  | 118 | 102 | 114 | 99  | 111 | 97  | 95 | 107 | 97  | 104 | 95 | 93 | 98  | 93 | 91 | 88 |
|             | 10   | 126           | 105 | 123 | 103 | 119 | 102 | 100 | 121 | 104 | 118 | 102 | 115 | 100 | 99 | 110 | 100 | 108 | 98 | 97 | 101 | 96 | 95 | 91 |

## 配光曲線

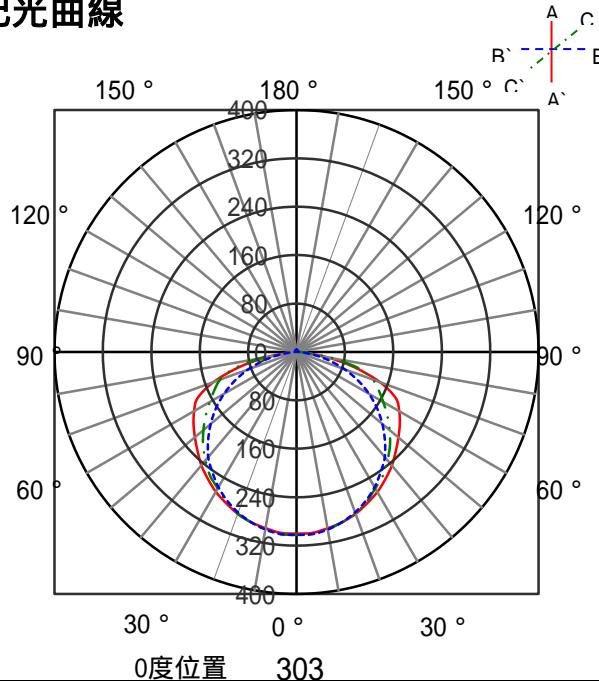

## 直射水平面照度

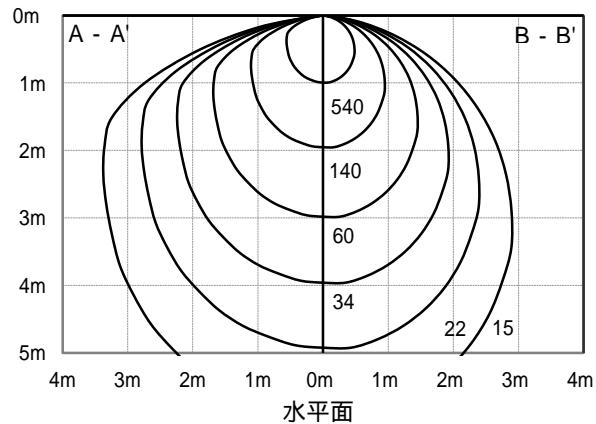

## ECOHiLUX 照明器具 配光データシート

|      |                         |      |      |
|------|-------------------------|------|------|
| 器具品名 | 直管用専用器具<br>直付下面開放型40形2灯 | 保守率  |      |
|      |                         | 良    | 0.81 |
| 器具品番 | IRLDLFL42CL-K           | 中    |      |
|      |                         | 否    | 0.77 |
| 部品品名 | -                       | 否    |      |
|      |                         | 器具効率 |      |
| 器具光束 | 3418lm                  | 上方向  | -    |
|      |                         | 下方向  | 85%  |
| 光源   | LDGF40T-WW/15/20P       | 全方向  | 85%  |
|      |                         |      |      |
| 光源光束 | 2000lm × 2              |      |      |

## 意匠図




## 照度率表


## 作業面照度率(×0.01)

| 反射率         | 天井   | 80  |     |     |     |     |     |     |     | 70  |     |     |     |     |    |     |     | 50  |    |    |     |    |    |    |    | 0  |    |    |  |
|-------------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|----|----|-----|----|----|----|----|----|----|----|--|
|             |      | 壁   |     | 70  |     | 50  |     | 30  |     | 10  |     | 70  |     | 50  |    | 30  |     | 10  |    | 50 |     | 30 |    | 10 |    | 30 |    | 10 |  |
|             |      | 床   |     | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10 | 30  | 10  | 30  | 10 | 30 | 10  | 30 | 10 | 30 | 10 | 30 | 10 | 0  |  |
| 室<br>指<br>数 | 0.4  | 44  | 41  | 30  | 29  | 23  | 22  | 18  | 43  | 40  | 30  | 29  | 22  | 22  | 17 | 29  | 28  | 22  | 22 | 17 | 22  | 21 | 17 | 16 |    |    |    |    |  |
|             | 0.6  | 61  | 56  | 46  | 43  | 37  | 36  | 30  | 59  | 55  | 45  | 43  | 36  | 35  | 30 | 43  | 42  | 35  | 35 | 30 | 35  | 34 | 29 | 27 |    |    |    |    |  |
|             | 0.8  | 71  | 65  | 56  | 52  | 46  | 44  | 38  | 69  | 63  | 55  | 52  | 45  | 44  | 38 | 52  | 50  | 44  | 43 | 37 | 43  | 42 | 37 | 35 |    |    |    |    |  |
|             | 1    | 80  | 72  | 65  | 60  | 55  | 52  | 46  | 77  | 70  | 64  | 59  | 54  | 52  | 46 | 61  | 58  | 52  | 51 | 45 | 51  | 50 | 45 | 42 |    |    |    |    |  |
|             | 1.25 | 89  | 79  | 75  | 68  | 65  | 61  | 54  | 85  | 77  | 73  | 67  | 63  | 60  | 54 | 69  | 65  | 61  | 59 | 54 | 59  | 58 | 53 | 50 |    |    |    |    |  |
|             | 1.5  | 94  | 83  | 81  | 73  | 71  | 66  | 60  | 91  | 81  | 79  | 72  | 70  | 65  | 60 | 75  | 70  | 67  | 64 | 59 | 65  | 63 | 58 | 55 |    |    |    |    |  |
|             | 2    | 102 | 89  | 91  | 81  | 82  | 75  | 69  | 99  | 87  | 88  | 80  | 80  | 74  | 69 | 83  | 78  | 76  | 72 | 68 | 73  | 71 | 67 | 64 |    |    |    |    |  |
|             | 2.5  | 108 | 93  | 98  | 86  | 90  | 81  | 76  | 104 | 91  | 95  | 85  | 87  | 80  | 75 | 90  | 83  | 83  | 78 | 74 | 80  | 77 | 73 | 70 |    |    |    |    |  |
|             | 3    | 112 | 96  | 103 | 90  | 95  | 85  | 80  | 107 | 94  | 99  | 89  | 93  | 84  | 80 | 94  | 86  | 88  | 82 | 78 | 84  | 80 | 77 | 74 |    |    |    |    |  |
|             | 4    | 117 | 99  | 109 | 95  | 103 | 90  | 87  | 112 | 98  | 106 | 93  | 100 | 89  | 86 | 99  | 91  | 95  | 87 | 84 | 90  | 86 | 83 | 80 |    |    |    |    |  |
|             | 5    | 120 | 101 | 114 | 98  | 108 | 94  | 91  | 115 | 100 | 110 | 96  | 105 | 93  | 90 | 103 | 94  | 99  | 91 | 88 | 94  | 89 | 87 | 84 |    |    |    |    |  |
|             | 7    | 123 | 104 | 119 | 101 | 115 | 98  | 96  | 119 | 102 | 115 | 100 | 111 | 97  | 95 | 107 | 97  | 104 | 95 | 93 | 98  | 93 | 91 | 88 |    |    |    |    |  |
|             | 10   | 126 | 105 | 123 | 104 | 120 | 102 | 100 | 121 | 104 | 118 | 102 | 116 | 101 | 99 | 110 | 100 | 108 | 98 | 97 | 102 | 96 | 95 | 92 |    |    |    |    |  |

## 配光曲線

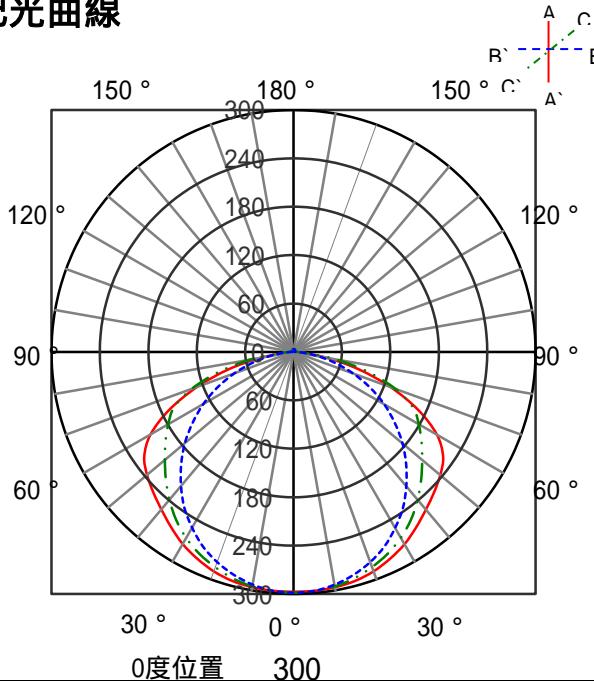


## 直射水平面照度

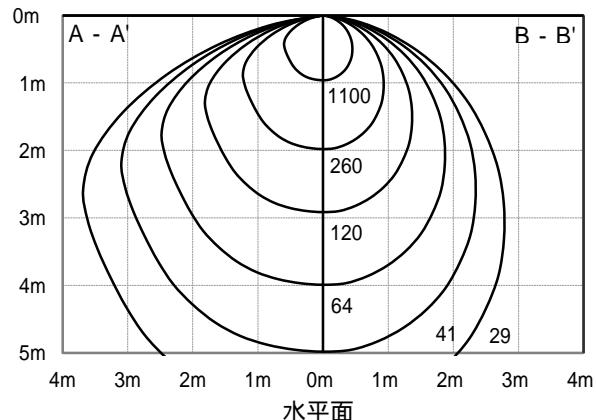

## ECOHiLUX 照明器具 配光データシート

|      |                          |      |      |
|------|--------------------------|------|------|
| 器具品名 | 直管用専用器具<br>直付下面ルーバー40形1灯 | 保守率  |      |
|      |                          | 良    | 0.81 |
| 器具品番 | IRLDFL41CL-LVK           | 中    |      |
|      |                          | 否    | 0.77 |
| 部品品名 | -                        | 否    |      |
|      |                          | 器具効率 |      |
| 器具光束 | 1378lm                   | 上方向  | 0%   |
|      |                          | 下方向  | 69%  |
| 光源   | LDGF40T-WW/15/20P        | 全方向  | 69%  |
|      |                          |      |      |
| 光源光束 | 2000lm × 1               |      |      |


## 意匠図

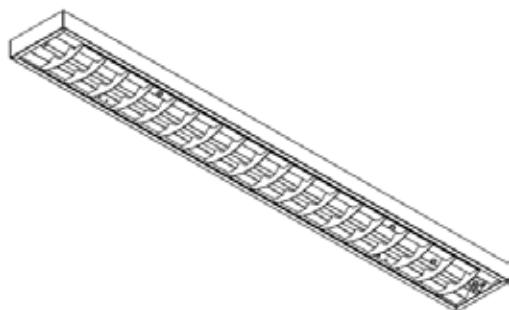


## 照度率表

| 反射率  | 天井 | 作業面照度率(×0.01) |     |     |     |     |     |     |     |     |     |     |     | 30  | 0   |    |  |
|------|----|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|--|
|      |    | 80            |     |     |     | 70  |     |     |     | 50  |     |     |     |     |     |    |  |
|      |    | 壁             | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |     |     |    |  |
| 床    |    | 30            | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 0   |    |  |
| 0.4  |    | 47            | 44  | 33  | 32  | 26  | 25  | 21  | 45  | 43  | 33  | 31  | 25  | 20  | 18  |    |  |
| 0.6  |    | 64            | 59  | 50  | 47  | 41  | 40  | 35  | 62  | 58  | 49  | 47  | 41  | 40  | 38  | 32 |  |
| 0.8  |    | 75            | 68  | 60  | 57  | 51  | 49  | 43  | 72  | 66  | 59  | 56  | 50  | 48  | 42  | 40 |  |
| 1    |    | 84            | 75  | 70  | 65  | 60  | 57  | 51  | 81  | 74  | 68  | 64  | 59  | 57  | 51  | 48 |  |
| 1.25 |    | 92            | 82  | 79  | 73  | 70  | 66  | 60  | 89  | 80  | 77  | 72  | 69  | 65  | 60  | 56 |  |
| 1.5  |    | 98            | 86  | 85  | 77  | 76  | 71  | 65  | 94  | 84  | 83  | 76  | 75  | 70  | 64  | 61 |  |
| 2    |    | 105           | 92  | 94  | 84  | 86  | 79  | 74  | 101 | 90  | 92  | 83  | 84  | 78  | 73  | 68 |  |
| 2.5  |    | 110           | 95  | 101 | 89  | 94  | 84  | 80  | 106 | 94  | 98  | 88  | 91  | 83  | 79  | 82 |  |
| 3    |    | 114           | 98  | 105 | 92  | 98  | 88  | 84  | 110 | 96  | 102 | 91  | 96  | 87  | 83  | 80 |  |
| 4    |    | 118           | 100 | 111 | 96  | 105 | 93  | 89  | 114 | 99  | 108 | 95  | 102 | 92  | 89  | 85 |  |
| 5    |    | 121           | 102 | 115 | 99  | 110 | 96  | 93  | 116 | 101 | 111 | 98  | 107 | 95  | 92  | 86 |  |
| 7    |    | 124           | 104 | 120 | 102 | 116 | 100 | 97  | 119 | 103 | 116 | 101 | 112 | 98  | 96  | 92 |  |
| 10   |    | 127           | 106 | 123 | 104 | 120 | 102 | 101 | 122 | 104 | 119 | 103 | 116 | 101 | 100 | 92 |  |

## 配光曲線

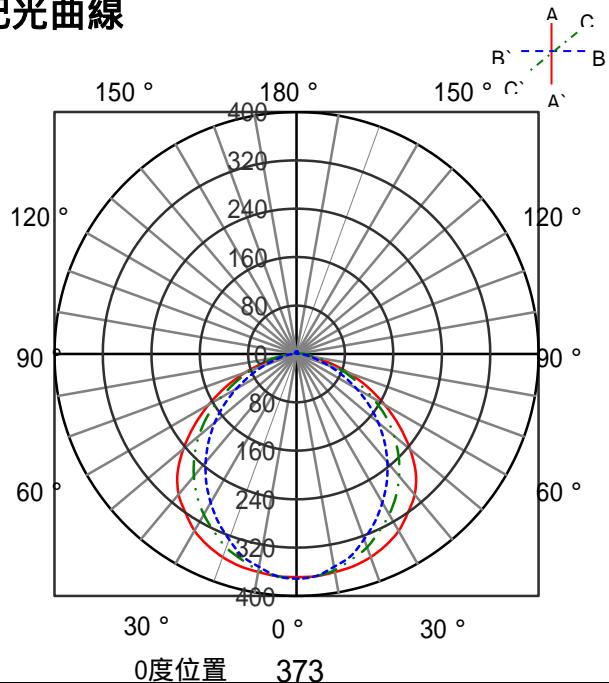


## 直射水平面照度

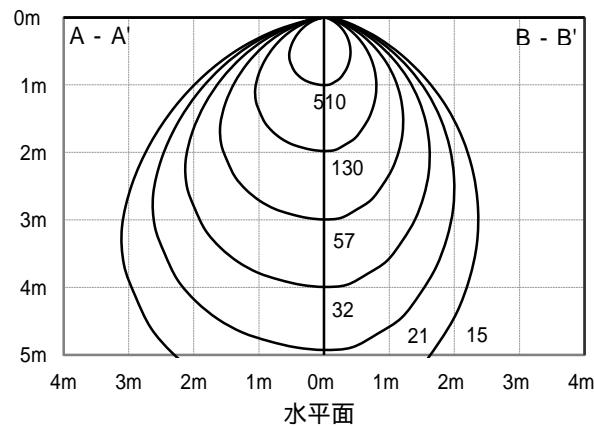

## ECOHiLUX 照明器具 配光データシート

## 意匠図

| 器具品名 | 直管用専用器具<br>埋込下面開放型40形1灯 | 保守率 |         |  |
|------|-------------------------|-----|---------|--|
|      |                         | 良   | 0.81    |  |
| 器具品番 | IRLDLFL41UK-K           |     | 中 0.77  |  |
| 部品品名 | -                       |     | 否 0.67  |  |
| 部品品番 | -                       |     | 器具効率    |  |
| 器具光束 | 1816lm                  |     | 上方向 -   |  |
| 光源   | LDGF40T-WW/15/20P       |     | 下方向 91% |  |
| 光源光束 | 2000lm × 1              |     | 全方向 91% |  |

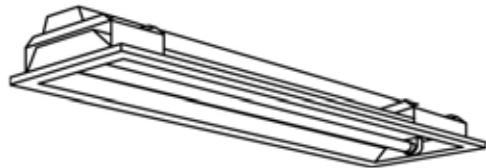


## 照明率表


## 作業面照明率(×0.01)

| 反射率         | 天井   | 80  |     |     |     |     |     |    |     |     |     | 70  |     |     |    |     |    |     |    |    |     | 50 |    |    |    |    |    |   |  |  |  |
|-------------|------|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|---|--|--|--|
|             |      | 70  |     | 50  |     | 30  |     | 10 |     | 70  |     | 50  |     | 30  |    | 10  |    | 50  |    | 30 |     | 10 |    | 30 |    | 10 |    | 0 |  |  |  |
|             | 壁    | 30  | 10  | 30  | 10  | 30  | 10  | 10 | 30  | 10  | 30  | 10  | 30  | 10  | 10 | 30  | 10 | 30  | 10 | 30 | 10  | 10 | 30 | 10 | 10 | 30 | 10 | 0 |  |  |  |
| 室<br>指<br>数 | 0.4  | 44  | 41  | 30  | 29  | 22  | 22  | 17 | 42  | 40  | 29  | 28  | 22  | 22  | 17 | 29  | 28 | 22  | 21 | 21 | 17  | 17 | 15 |    |    |    |    |   |  |  |  |
|             | 0.6  | 60  | 55  | 45  | 43  | 36  | 35  | 29 | 58  | 54  | 44  | 42  | 36  | 35  | 29 | 43  | 41 | 35  | 34 | 29 | 34  | 34 | 29 | 27 |    |    |    |   |  |  |  |
|             | 0.8  | 70  | 64  | 55  | 52  | 45  | 43  | 37 | 68  | 62  | 54  | 51  | 44  | 43  | 37 | 52  | 49 | 43  | 42 | 37 | 42  | 41 | 36 | 34 |    |    |    |   |  |  |  |
|             | 1    | 79  | 71  | 64  | 59  | 54  | 51  | 45 | 76  | 69  | 63  | 59  | 53  | 51  | 45 | 60  | 57 | 52  | 50 | 44 | 50  | 49 | 44 | 42 |    |    |    |   |  |  |  |
|             | 1.25 | 88  | 78  | 73  | 67  | 63  | 59  | 53 | 85  | 76  | 72  | 66  | 62  | 59  | 53 | 68  | 65 | 60  | 58 | 53 | 59  | 57 | 52 | 50 |    |    |    |   |  |  |  |
|             | 1.5  | 93  | 82  | 80  | 72  | 70  | 65  | 59 | 90  | 80  | 78  | 71  | 69  | 64  | 58 | 74  | 69 | 66  | 63 | 58 | 64  | 62 | 57 | 55 |    |    |    |   |  |  |  |
|             | 2    | 101 | 88  | 90  | 80  | 80  | 73  | 68 | 98  | 86  | 87  | 79  | 73  | 67  | 83 | 77  | 76 | 71  | 67 | 73 | 70  | 66 | 63 |    |    |    |    |   |  |  |  |
|             | 2.5  | 107 | 92  | 97  | 85  | 88  | 80  | 75 | 103 | 91  | 94  | 84  | 86  | 79  | 74 | 89  | 82 | 83  | 77 | 73 | 79  | 76 | 72 | 70 |    |    |    |   |  |  |  |
|             | 3    | 111 | 95  | 101 | 89  | 94  | 84  | 79 | 107 | 93  | 98  | 88  | 91  | 83  | 79 | 93  | 85 | 87  | 81 | 78 | 83  | 80 | 76 | 74 |    |    |    |   |  |  |  |
|             | 4    | 116 | 98  | 108 | 94  | 102 | 89  | 86 | 111 | 97  | 105 | 92  | 99  | 88  | 85 | 98  | 90 | 94  | 87 | 84 | 89  | 85 | 82 | 80 |    |    |    |   |  |  |  |
|             | 5    | 119 | 100 | 112 | 97  | 107 | 93  | 90 | 114 | 99  | 109 | 95  | 104 | 92  | 89 | 102 | 93 | 98  | 90 | 88 | 93  | 89 | 86 | 84 |    |    |    |   |  |  |  |
|             | 7    | 122 | 103 | 118 | 100 | 113 | 97  | 95 | 118 | 101 | 114 | 99  | 110 | 96  | 94 | 106 | 97 | 103 | 95 | 93 | 98  | 93 | 91 | 88 |    |    |    |   |  |  |  |
|             | 10   | 125 | 105 | 122 | 103 | 119 | 101 | 99 | 120 | 103 | 118 | 102 | 115 | 100 | 98 | 110 | 99 | 108 | 98 | 96 | 101 | 96 | 95 | 92 |    |    |    |   |  |  |  |

## 配光曲線

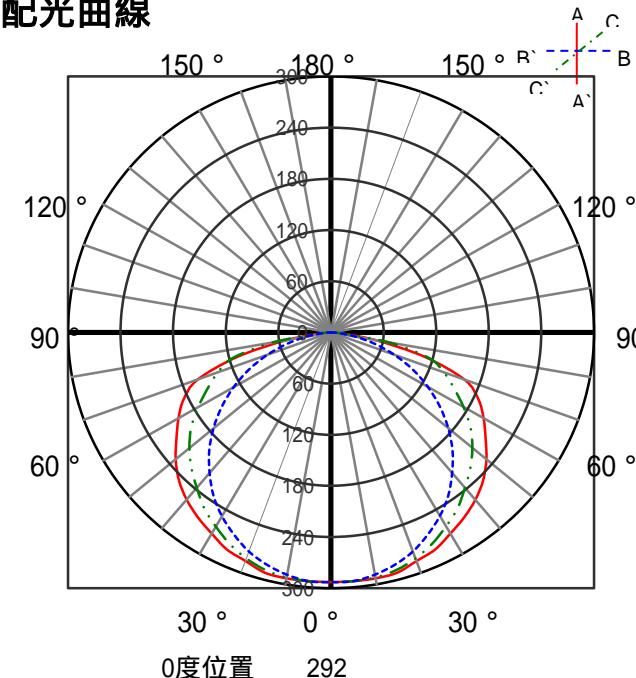


## 直射水平面照度

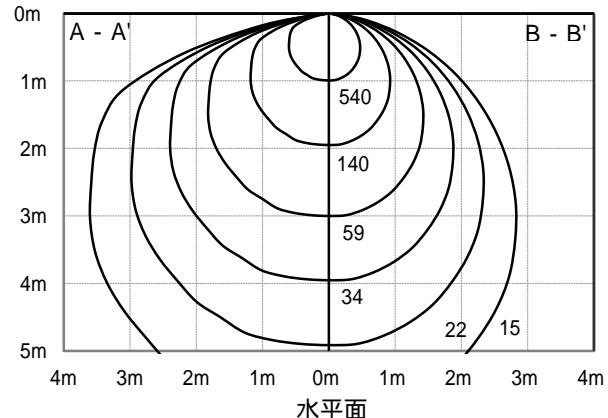

## ECOHiLUX 照明器具 配光データシート

|      |                         |      |      |
|------|-------------------------|------|------|
| 器具品名 | 直管用専用器具<br>埋込下面開放型40形2灯 | 保守率  |      |
|      |                         | 良    | 0.81 |
| 器具品番 | IRLDL42UK-K             | 中    | 0.77 |
| 部品品名 | -                       | 否    | 0.67 |
| 部品品番 | -                       | 器具効率 |      |
| 器具光束 | 3659lm                  | 上方向  | -    |
| 光源   | LDGF40T·WW/15/20P       | 下方向  | 91%  |
| 光源光束 | 2000lm × 2              | 全方向  | 91%  |


意匠圖

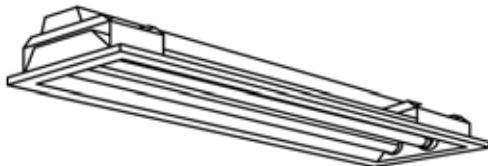


## 照明率表

|         |      | 作業面照明率(×0.01) |     |     |     |     |     |    |     |     |     |     |     |    |    |     |    |     |    |    |     |    |    |
|---------|------|---------------|-----|-----|-----|-----|-----|----|-----|-----|-----|-----|-----|----|----|-----|----|-----|----|----|-----|----|----|
| 反射率     | 天井   | 80            |     |     |     |     |     | 70 |     |     |     |     |     | 50 |    |     |    |     |    | 30 |     |    |    |
|         | 壁    | 70            |     | 50  |     | 30  |     | 10 |     | 70  |     | 50  |     | 30 |    | 10  |    | 50  |    | 30 |     | 0  |    |
|         | 床    | 30            | 10  | 30  | 10  | 30  | 10  | 10 | 30  | 10  | 30  | 10  | 30  | 10 | 10 | 30  | 10 | 30  | 10 | 30 | 10  | 0  |    |
| 室指<br>数 | 0.4  | 43            | 41  | 30  | 29  | 22  | 22  | 17 | 42  | 40  | 29  | 28  | 22  | 21 | 17 | 28  | 27 | 21  | 21 | 17 | 21  | 17 | 15 |
|         | 0.6  | 60            | 55  | 45  | 42  | 35  | 34  | 29 | 58  | 54  | 44  | 42  | 35  | 34 | 29 | 42  | 41 | 34  | 34 | 29 | 34  | 33 | 28 |
|         | 0.8  | 70            | 64  | 54  | 51  | 44  | 43  | 36 | 68  | 62  | 53  | 50  | 44  | 42 | 36 | 51  | 49 | 43  | 41 | 36 | 42  | 41 | 34 |
|         | 1    | 79            | 71  | 63  | 59  | 53  | 50  | 44 | 76  | 69  | 62  | 58  | 52  | 50 | 44 | 59  | 56 | 51  | 49 | 44 | 50  | 48 | 43 |
|         | 1.25 | 87            | 77  | 73  | 67  | 62  | 59  | 52 | 84  | 76  | 71  | 66  | 61  | 58 | 52 | 68  | 64 | 60  | 57 | 52 | 58  | 56 | 51 |
|         | 1.5  | 92            | 81  | 79  | 72  | 69  | 64  | 58 | 89  | 80  | 77  | 70  | 67  | 63 | 57 | 73  | 68 | 65  | 62 | 57 | 63  | 61 | 56 |
|         | 2    | 101           | 88  | 89  | 79  | 79  | 72  | 66 | 97  | 86  | 86  | 78  | 77  | 72 | 66 | 82  | 76 | 74  | 70 | 65 | 72  | 69 | 65 |
|         | 2.5  | 106           | 92  | 96  | 85  | 87  | 78  | 73 | 102 | 90  | 93  | 83  | 85  | 78 | 73 | 88  | 81 | 81  | 76 | 72 | 78  | 75 | 71 |
|         | 3    | 110           | 94  | 100 | 88  | 93  | 83  | 78 | 106 | 93  | 97  | 87  | 90  | 82 | 77 | 92  | 84 | 86  | 80 | 76 | 82  | 79 | 75 |
|         | 4    | 115           | 98  | 107 | 93  | 100 | 88  | 84 | 110 | 96  | 104 | 91  | 98  | 87 | 84 | 97  | 89 | 93  | 86 | 82 | 88  | 84 | 81 |
|         | 5    | 118           | 100 | 111 | 96  | 106 | 92  | 89 | 114 | 98  | 108 | 95  | 103 | 91 | 88 | 101 | 92 | 97  | 89 | 86 | 92  | 87 | 85 |
|         | 7    | 122           | 102 | 117 | 99  | 112 | 96  | 94 | 117 | 101 | 113 | 98  | 109 | 95 | 93 | 106 | 96 | 102 | 93 | 91 | 97  | 92 | 90 |
|         | 10   | 125           | 104 | 121 | 102 | 118 | 100 | 98 | 120 | 103 | 117 | 101 | 114 | 99 | 97 | 109 | 98 | 107 | 97 | 95 | 100 | 95 | 94 |

## 配光曲線

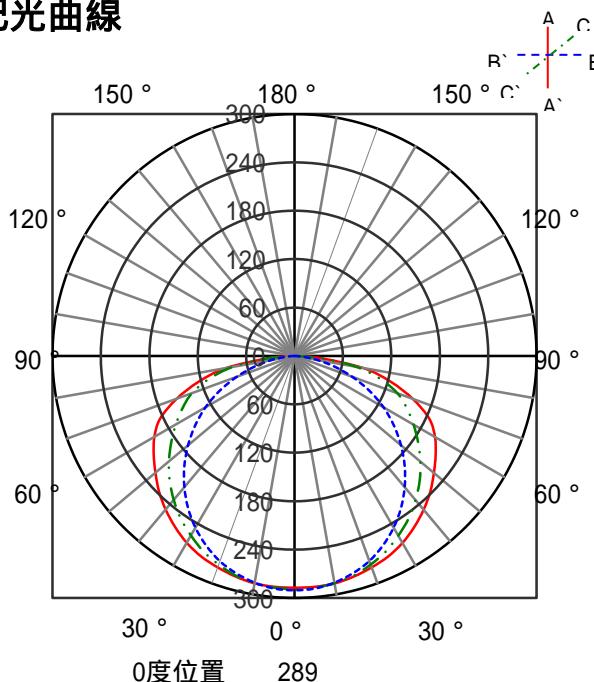


## 直射水平面照度

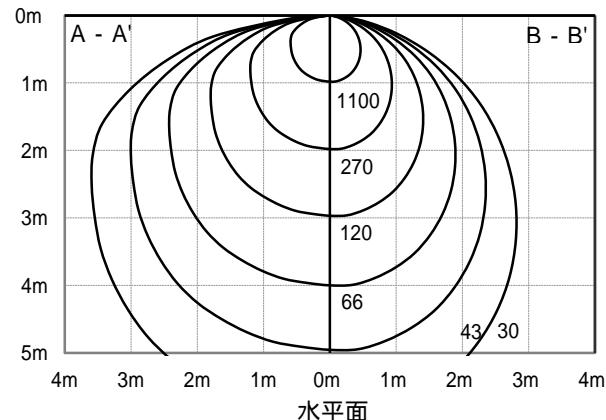

## ECOHiLUX 照明器具 配光データシート

|      |                       |      |      |
|------|-----------------------|------|------|
| 器具品名 | 直管用専用器具<br>埋込下面開40形4灯 | 保守率  |      |
|      |                       | 良    | 0.81 |
| 器具品番 | IRLDL44UK-K           | 中    |      |
|      |                       | 否    | 0.77 |
| 部品品名 | -                     | 否    |      |
|      |                       | 器具効率 |      |
| 器具光束 | 6240lm                | 上方向  | 0%   |
|      |                       | 下方向  | 78%  |
| 光源   | LDGF40T-D/14/20P      | 全方向  | 78%  |
|      |                       |      |      |
| 光源光束 | 2000lm × 4            |      |      |


## 意匠図

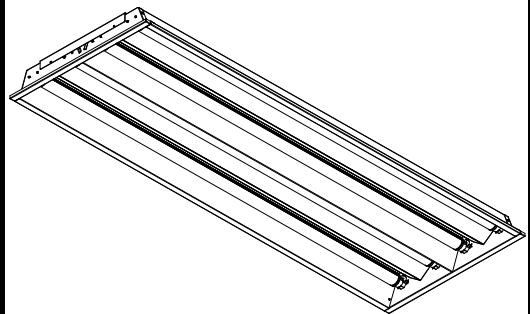


## 照度率表

| 作業面照度率(×0.01) |      |     |     |     |     |     |     |     |     |     |     |     |     |     |    | 0   |     |
|---------------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|-----|
| 反射率           | 天井   | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |    | 0   |     |
|               |      | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 30  | 10  | 10 | 0   |     |
|               | 壁    | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10 | 0   |     |
| 室<br>指<br>数   | 床    | 46  | 43  | 32  | 31  | 25  | 24  | 20  | 45  | 42  | 32  | 31  | 25  | 24  | 20 | 24  | 20  |
|               | 0.4  | 63  | 58  | 49  | 47  | 40  | 39  | 34  | 62  | 57  | 48  | 46  | 40  | 39  | 34 | 39  | 38  |
|               | 0.6  | 74  | 67  | 59  | 56  | 50  | 48  | 42  | 72  | 66  | 58  | 55  | 49  | 47  | 42 | 47  | 46  |
|               | 0.8  | 83  | 74  | 69  | 64  | 59  | 56  | 50  | 80  | 73  | 67  | 63  | 58  | 56  | 50 | 56  | 54  |
|               | 1    | 91  | 81  | 78  | 72  | 69  | 65  | 59  | 88  | 80  | 77  | 71  | 68  | 64  | 59 | 63  | 62  |
|               | 1.25 | 97  | 85  | 84  | 77  | 75  | 70  | 64  | 93  | 83  | 82  | 76  | 74  | 69  | 74 | 71  | 68  |
|               | 1.5  | 104 | 91  | 94  | 84  | 85  | 78  | 73  | 101 | 89  | 91  | 83  | 84  | 77  | 72 | 81  | 80  |
|               | 2    | 110 | 95  | 100 | 89  | 93  | 84  | 79  | 106 | 93  | 98  | 88  | 91  | 83  | 79 | 92  | 85  |
|               | 2.5  | 113 | 97  | 105 | 92  | 98  | 87  | 83  | 109 | 95  | 102 | 91  | 95  | 86  | 83 | 96  | 88  |
|               | 3    | 117 | 100 | 111 | 96  | 105 | 92  | 89  | 113 | 98  | 107 | 95  | 102 | 91  | 88 | 101 | 97  |
|               | 4    | 120 | 102 | 115 | 98  | 109 | 95  | 92  | 116 | 100 | 111 | 97  | 106 | 94  | 92 | 104 | 95  |
|               | 5    | 123 | 104 | 119 | 101 | 115 | 99  | 97  | 119 | 102 | 115 | 100 | 112 | 98  | 96 | 108 | 98  |
|               | 7    | 126 | 105 | 123 | 103 | 120 | 102 | 100 | 121 | 104 | 118 | 102 | 116 | 101 | 99 | 111 | 100 |
|               | 10   | 126 | 105 | 123 | 103 | 120 | 102 | 100 | 121 | 104 | 118 | 102 | 116 | 101 | 99 | 109 | 99  |

## 配光曲線

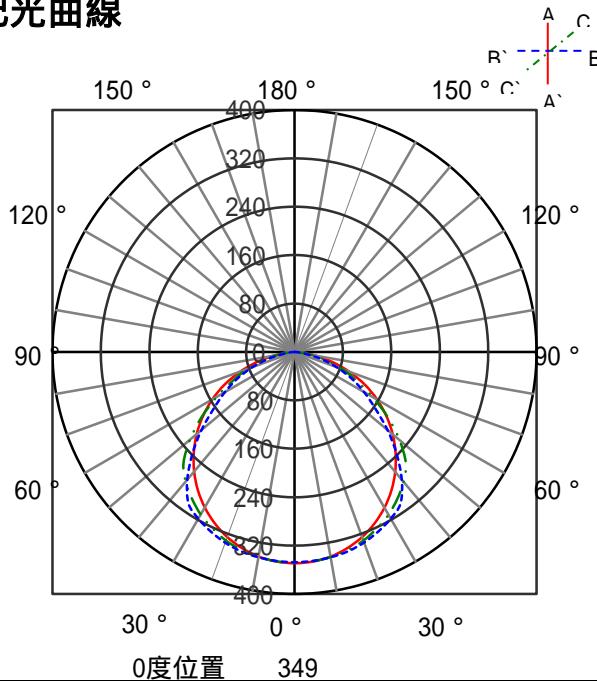


## 直射水平面照度

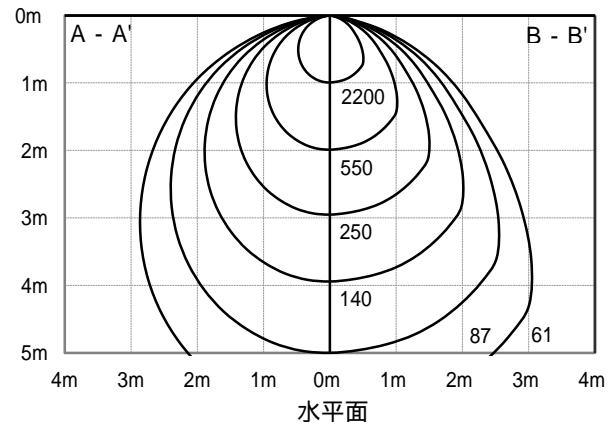

## ECOHiLUX 照明器具 配光データシート

|      |                          |      |      |
|------|--------------------------|------|------|
| 器具品名 | 直管用専用器具<br>埋込下面ルーバー40形4灯 | 保守率  |      |
|      |                          | 良    | 0.81 |
| 器具品番 | IRLDL44UK-LVK            | 中    |      |
|      |                          | 否    | 0.67 |
| 部品品名 | -                        | 器具効率 |      |
|      |                          | 上方向  | 0%   |
| 部品品番 | -                        | 下方向  | 71%  |
|      |                          | 全方向  | 71%  |
| 器具光束 | 5680lm                   |      |      |
| 光源   | LDGF40T-WW/15/20P        |      |      |
| 光源光束 | 2000lm × 4               |      |      |


## 意匠図

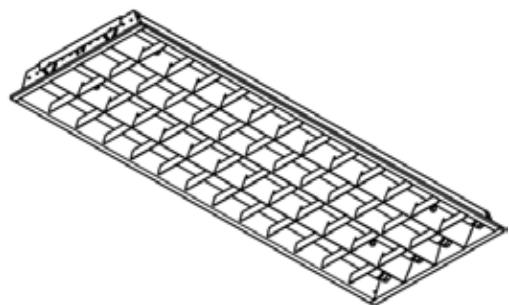


## 照度率表

| 反射率  | 天井 | 作業面照度率(×0.01) |     |     |     |     |     |     |     |     |     |     |     |     |     | 0   |
|------|----|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|      |    | 80            |     | 70  |     | 50  |     | 30  |     | 10  |     | 50  |     | 30  |     |     |
|      |    | 壁             | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  |
| 0.4  | 壁  | 48            | 45  | 35  | 34  | 28  | 27  | 23  | 47  | 44  | 35  | 34  | 28  | 27  | 23  | 27  |
| 0.6  | 壁  | 67            | 62  | 53  | 51  | 45  | 44  | 39  | 65  | 61  | 53  | 50  | 45  | 43  | 39  | 43  |
| 0.8  | 壁  | 77            | 70  | 64  | 60  | 55  | 52  | 47  | 75  | 69  | 62  | 59  | 54  | 52  | 47  | 52  |
| 1    | 壁  | 86            | 78  | 73  | 68  | 64  | 61  | 56  | 84  | 76  | 72  | 67  | 63  | 60  | 55  | 59  |
| 1.25 | 壁  | 95            | 84  | 83  | 76  | 74  | 69  | 65  | 92  | 83  | 81  | 75  | 73  | 69  | 64  | 69  |
| 1.5  | 壁  | 100           | 88  | 88  | 80  | 80  | 74  | 69  | 97  | 86  | 86  | 79  | 78  | 74  | 69  | 74  |
| 2    | 壁  | 107           | 93  | 97  | 87  | 89  | 81  | 77  | 103 | 92  | 95  | 86  | 88  | 81  | 77  | 84  |
| 2.5  | 壁  | 112           | 96  | 103 | 91  | 96  | 87  | 83  | 108 | 95  | 100 | 90  | 94  | 86  | 82  | 95  |
| 3    | 壁  | 115           | 98  | 107 | 94  | 101 | 90  | 86  | 111 | 97  | 104 | 93  | 98  | 89  | 86  | 99  |
| 4    | 壁  | 119           | 101 | 112 | 97  | 107 | 94  | 91  | 115 | 100 | 109 | 96  | 104 | 93  | 91  | 103 |
| 5    | 壁  | 121           | 103 | 116 | 100 | 111 | 97  | 94  | 117 | 101 | 112 | 98  | 108 | 96  | 94  | 106 |
| 7    | 壁  | 124           | 104 | 120 | 102 | 116 | 100 | 98  | 120 | 103 | 116 | 101 | 113 | 99  | 97  | 109 |
| 10   | 壁  | 126           | 106 | 123 | 104 | 120 | 102 | 101 | 122 | 104 | 119 | 103 | 116 | 101 | 101 | 109 |
| 0.4  | 床  | 30            | 10  | 30  | 10  | 30  | 10  | 10  | 30  | 10  | 30  | 10  | 10  | 30  | 10  | 10  |
| 0.6  | 床  | 67            | 62  | 53  | 51  | 45  | 44  | 39  | 65  | 61  | 53  | 50  | 45  | 43  | 39  | 43  |
| 0.8  | 床  | 77            | 70  | 64  | 60  | 55  | 52  | 47  | 75  | 69  | 62  | 59  | 54  | 52  | 47  | 52  |
| 1    | 床  | 86            | 78  | 73  | 68  | 64  | 61  | 56  | 84  | 76  | 72  | 67  | 63  | 60  | 55  | 53  |
| 1.25 | 床  | 95            | 84  | 83  | 76  | 74  | 69  | 65  | 92  | 83  | 81  | 75  | 73  | 69  | 64  | 63  |
| 1.5  | 床  | 100           | 88  | 88  | 80  | 80  | 74  | 69  | 97  | 86  | 86  | 79  | 78  | 74  | 69  | 74  |
| 2    | 床  | 107           | 93  | 97  | 87  | 89  | 81  | 77  | 103 | 92  | 95  | 86  | 88  | 81  | 77  | 84  |
| 2.5  | 床  | 112           | 96  | 103 | 91  | 96  | 87  | 83  | 108 | 95  | 100 | 90  | 94  | 86  | 82  | 95  |
| 3    | 床  | 115           | 98  | 107 | 94  | 101 | 90  | 86  | 111 | 97  | 104 | 93  | 98  | 89  | 86  | 99  |
| 4    | 床  | 119           | 101 | 112 | 97  | 107 | 94  | 91  | 115 | 100 | 109 | 96  | 104 | 93  | 91  | 103 |
| 5    | 床  | 121           | 103 | 116 | 100 | 111 | 97  | 94  | 117 | 101 | 112 | 98  | 108 | 96  | 94  | 106 |
| 7    | 床  | 124           | 104 | 120 | 102 | 116 | 100 | 98  | 120 | 103 | 116 | 101 | 113 | 99  | 97  | 109 |
| 10   | 床  | 126           | 106 | 123 | 104 | 120 | 102 | 101 | 122 | 104 | 119 | 103 | 116 | 101 | 101 | 109 |

## 配光曲線

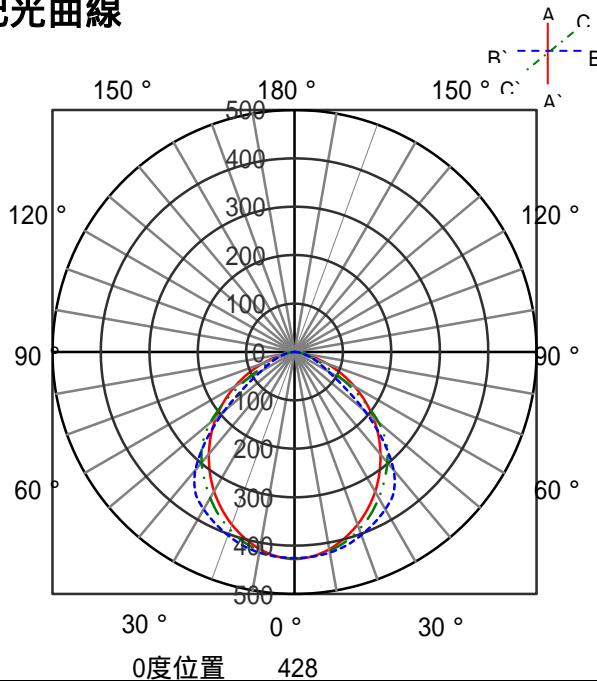


## 直射水平面照度

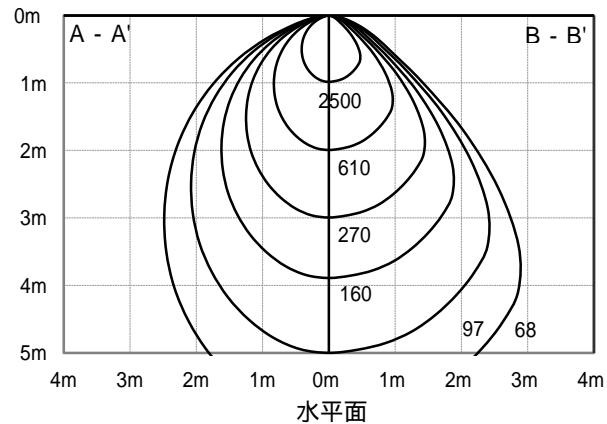

## ECOHiLUX照明器具 配光データシート

## 意匠図

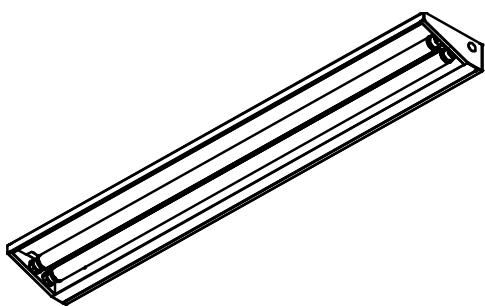


| 器具品名 | ウォールウォッシャー        | 保守率 |         |
|------|-------------------|-----|---------|
|      |                   | 良   | 0.69    |
| 器具品番 | IRLDL42CLWW-K     |     | 中 0.67  |
|      |                   |     | 否 0.63  |
| 部品品名 | -                 |     | 器具効率    |
|      |                   |     |         |
| 器具光束 | 3110lm            |     | 上方向 3%  |
| 光源   | LDGF40T-WW/15/20P |     | 下方向 75% |
| 光源光束 | 2000lm × 2        |     | 全方向 78% |

## 照明率表

| 反射率 | 天井   | 作業面照明率(× 0.01) |     |     |    |     |    |    |     |     |     |    |     | 0  |  |
|-----|------|----------------|-----|-----|----|-----|----|----|-----|-----|-----|----|-----|----|--|
|     |      | 80             |     |     |    | 70  |    |    |     | 50  |     |    |     |    |  |
|     |      | 壁              | 70  | 50  | 30 | 10  | 70 | 50 | 30  | 10  | 50  | 30 | 10  |    |  |
| 室指數 | 壁    | 30             | 10  | 30  | 10 | 30  | 10 | 10 | 30  | 10  | 30  | 10 | 10  | 0  |  |
|     | 0.4  | 43             | 40  | 29  | 28 | 22  | 21 | 17 | 41  | 39  | 29  | 28 | 21  | 20 |  |
|     | 0.6  | 59             | 54  | 44  | 42 | 35  | 34 | 28 | 57  | 53  | 43  | 41 | 34  | 27 |  |
|     | 0.8  | 69             | 62  | 53  | 50 | 43  | 41 | 35 | 66  | 60  | 52  | 49 | 42  | 32 |  |
|     | 1    | 77             | 69  | 62  | 57 | 51  | 49 | 42 | 74  | 67  | 60  | 56 | 50  | 34 |  |
|     | 1.25 | 85             | 76  | 71  | 65 | 60  | 57 | 50 | 82  | 73  | 69  | 63 | 59  | 45 |  |
|     | 1.5  | 90             | 80  | 76  | 69 | 66  | 62 | 55 | 87  | 77  | 74  | 68 | 65  | 49 |  |
|     | 2    | 98             | 85  | 86  | 77 | 76  | 70 | 64 | 94  | 83  | 83  | 75 | 74  | 57 |  |
|     | 2.5  | 104            | 89  | 93  | 82 | 84  | 75 | 70 | 99  | 87  | 89  | 80 | 81  | 62 |  |
|     | 3    | 107            | 92  | 97  | 85 | 89  | 79 | 74 | 103 | 90  | 94  | 84 | 86  | 66 |  |
| 指數  | 4    | 112            | 95  | 104 | 90 | 97  | 85 | 80 | 107 | 93  | 100 | 88 | 93  | 71 |  |
|     | 5    | 115            | 97  | 108 | 93 | 102 | 89 | 85 | 110 | 95  | 104 | 91 | 98  | 75 |  |
|     | 7    | 119            | 100 | 113 | 96 | 108 | 93 | 90 | 114 | 98  | 109 | 95 | 104 | 80 |  |
|     | 10   | 122            | 102 | 118 | 99 | 114 | 97 | 94 | 117 | 100 | 113 | 98 | 109 | 84 |  |

## 配光曲線

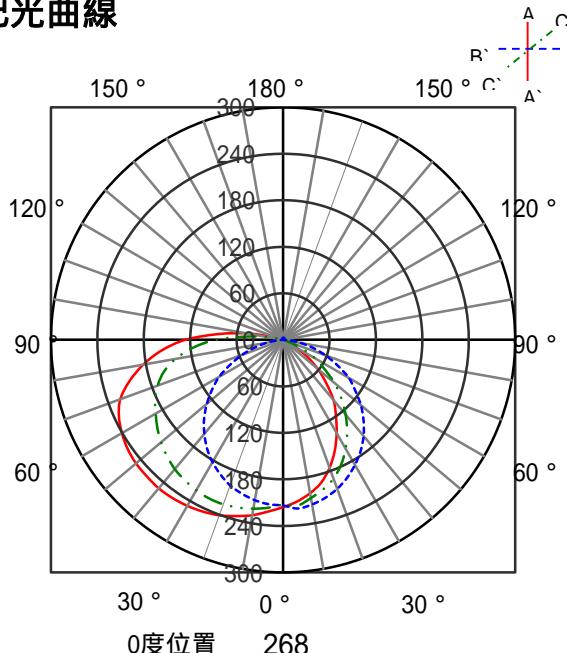

## 直射水平面照度

