


# ECOHiLUX照明器具 配光データシート

意匠図


器具品名	バラストレス水銀灯代替	保守率	
器具品番	LDR1020V10D8-H/16BK2	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	1450lm	器具効率	
光源	LED	上方向	4%
光源光束	1600lm	下方向	96%
		全方向	100%

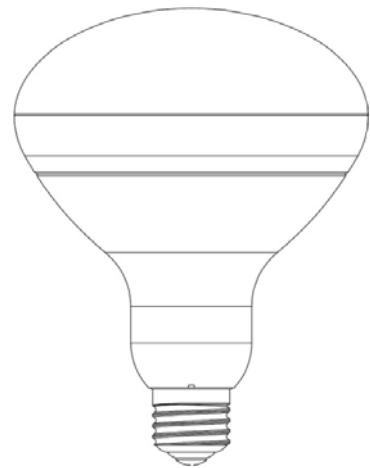

## 照明率表

		作業面照明率(×0.01)																						
反射率	天井	80				70				50				30				0						
	壁	70	50	30	10	70	50	30	10	50	30	10	30	10	10	30	10	0						
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	10	30	10	10	0		
室 指 数	0.4	45	42	31	30	24	23	19	43	41	31	30	23	23	19	29	29	23	22	18	22	22	18	16
	0.6	61	57	47	45	38	37	32	59	55	46	44	38	37	31	44	42	37	36	31	36	35	31	28
	0.8	72	65	57	53	47	45	39	69	63	55	52	46	45	39	53	50	45	44	38	43	43	38	35
	1	80	72	66	61	56	53	47	77	70	64	60	55	52	47	61	58	53	51	46	51	50	45	42
	1.25	88	79	75	69	65	61	55	85	77	73	67	64	60	55	69	65	61	59	54	59	57	53	50
	1.5	94	82	81	73	71	66	60	90	80	78	72	70	65	60	74	69	67	63	59	64	62	58	54
	2	101	88	90	80	81	74	69	97	86	87	79	79	73	68	82	76	75	71	67	72	69	65	62
	2.5	106	92	96	85	88	80	75	102	90	93	84	86	79	74	87	81	82	76	72	77	74	71	67
	3	110	94	101	88	93	83	79	105	92	97	87	91	82	78	91	84	86	80	76	81	78	75	71
	4	114	97	107	93	101	88	85	110	95	103	91	97	87	84	96	88	92	85	82	86	82	80	76
5	117	99	111	95	105	92	88	112	97	107	94	102	90	87	99	91	96	88	85	90	85	83	79	
7	121	102	116	99	112	96	93	116	100	111	97	108	94	92	103	94	100	92	90	94	89	87	83	
10	123	103	120	101	116	99	97	118	101	115	99	112	98	96	107	96	104	95	93	97	92	91	86	

## 配光曲線

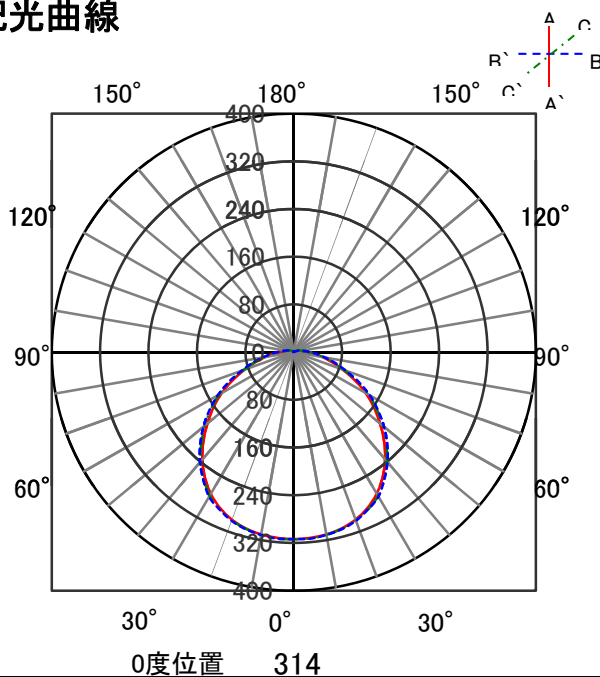

## 直射水平面照度

