


ECOHiLUX照明器具 配光データシート

意匠図

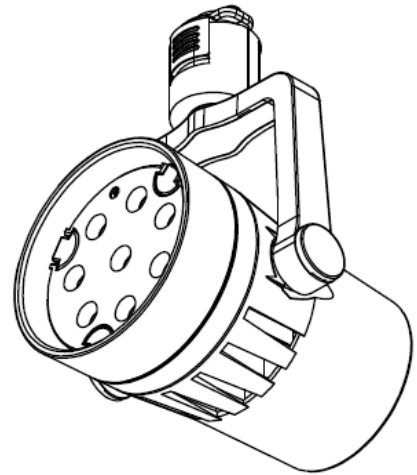


器具品名	LEDスポットライト S-tria生鮮シリーズ	保守率	
器具品番	SP8FI-25STB	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	1050lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

照明率表

		作業面照明率(×0.01)																											
反射率	天井	80								70								50				30				0			
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0	
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
室 指 数	0.4	65	61	53	51	47	46	42	64	60	53	51	47	46	42	52	51	46	46	42	46	45	42	41					
	0.6	84	77	73	69	66	64	60	82	76	72	69	65	63	60	70	68	64	63	60	64	63	59	58					
	0.8	95	86	84	79	76	73	70	93	85	83	78	76	73	70	81	77	75	73	69	74	72	69	67					
	1	102	91	91	85	84	80	76	99	90	90	84	83	79	76	87	83	81	79	75	80	78	75	73					
	1.25	108	96	98	90	91	86	82	105	95	96	89	90	85	82	93	88	88	84	81	86	83	81	79					
	1.5	112	99	103	93	96	89	86	109	97	101	93	95	89	86	97	91	92	88	85	90	87	84	83					
	2	117	102	110	98	103	94	91	114	101	107	97	101	94	91	103	95	98	93	90	95	91	89	87					
	2.5	121	105	114	101	109	98	95	117	103	111	100	106	97	95	106	98	102	96	94	99	95	93	91					
	3	124	106	118	103	112	100	98	120	105	114	102	110	100	97	109	100	105	98	96	101	97	95	93					
	4	127	108	122	106	118	104	102	123	107	119	105	115	103	101	112	103	109	101	100	105	100	98	96					
5	129	109	125	107	122	106	104	125	108	121	106	118	105	104	114	104	112	103	102	107	101	101	98						
7	131	111	129	109	126	108	107	127	109	125	108	122	107	106	117	106	115	105	105	109	104	103	100						
10	133	112	131	111	130	110	110	129	110	127	110	126	109	109	119	108	118	107	107	111	105	105	102						

配光曲線

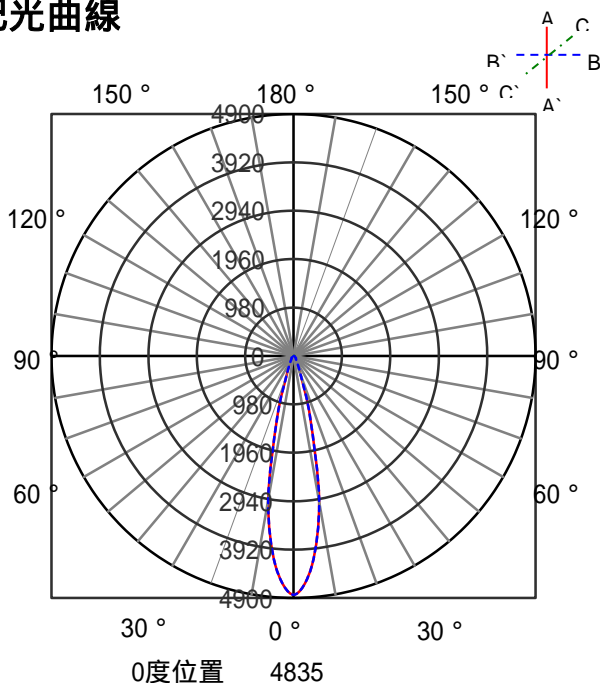

直射水平面照度

