


ECOHiLUX照明器具 配光データシート

意匠図

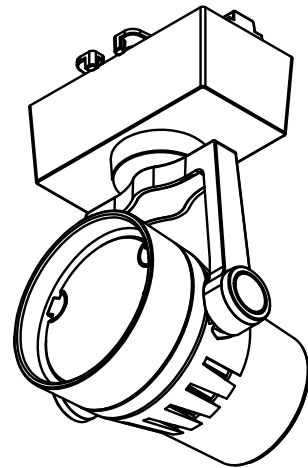


器具品名	LEDスポットライト S-triaシリーズ	保守率	
器具品番	SP24FI-50STB	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	2120lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

照明率表

		作業面照明率(×0.01)																											
反射率	天井	80								70				50				30				0							
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0	
床	30	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	10	30	10	0
室 指 数	0.4	61	57	48	47	42	41	37	59	56	48	46	41	41	37	47	46	41	40	37	41	40	37	35					
	0.6	79	73	67	64	59	58	53	78	72	66	63	59	57	53	65	62	58	57	53	57	56	53	51					
	0.8	90	82	78	74	71	68	63	88	81	77	73	70	67	63	75	72	69	67	63	68	66	63	61					
	1	98	88	86	80	78	74	70	95	87	85	79	78	74	70	82	78	76	73	70	74	73	69	67					
	1.25	105	93	94	86	86	81	77	102	92	92	85	85	80	77	89	84	83	80	76	81	79	76	74					
	1.5	109	96	99	90	92	85	81	106	95	97	89	90	85	81	93	88	88	84	80	85	83	80	78					
	2	115	100	107	95	100	91	88	112	99	104	94	98	90	87	99	92	94	89	86	91	88	85	83					
	2.5	119	103	112	99	105	95	92	115	102	109	98	103	94	91	104	96	99	93	90	95	92	89	87					
	3	122	105	115	101	110	98	95	118	103	112	100	107	97	94	106	98	102	95	93	98	94	92	90					
	4	126	107	120	104	115	101	99	121	106	117	103	112	101	98	110	101	107	99	97	102	97	96	93					
5	128	108	123	106	119	104	102	123	107	119	105	116	103	101	113	103	110	101	100	104	99	98	95						
7	130	110	127	108	124	107	105	126	108	123	107	120	106	104	116	105	114	104	103	107	102	101	98						
10	132	111	130	110	128	109	108	128	110	126	109	124	108	107	118	106	116	106	105	110	104	103	100						

配光曲線

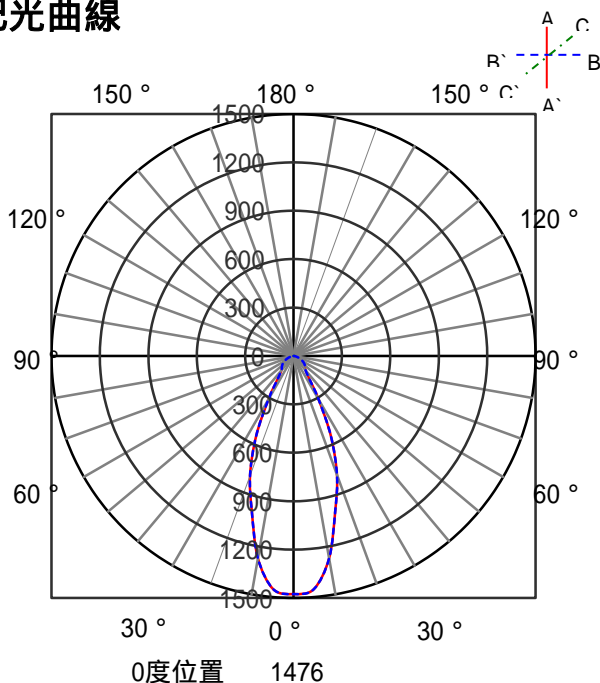

直射水平面照度

