


ECOHiLUX照明器具 配光データシート

器具品名	LEDダウンライト LAシリーズ	保守率	
		良	0.67
器具品番	DL33L308-20A6W-D	中	
	DL33L308-20A6W-DLS	0.63	
部品品名	-	否	
	-	0.56	
部品品番	-	器具効率	
	-	上方向	0%
器具光束	2587lm	下方向	100%
光源	-	全方向	100%
光源光束	一体型器具のため、器具光束表示		


意匠図

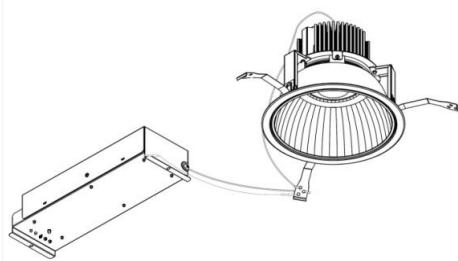

照度率表

反射率	天井	作業面照度率(×0.01)												0		
		80				70				50				0		
		壁	70	50	30	10	70	50	30	10	50	30	10	30	10	
0.4	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	
0.6	62	58	50	49	44	43	40	61	57	50	48	44	43	40	43	40
0.8	81	74	69	66	63	61	57	79	73	69	65	62	60	57	61	60
1	91	83	81	76	74	71	67	90	82	80	75	73	70	67	78	74
1.25	98	88	88	82	81	77	74	96	87	87	81	80	77	73	84	80
1.5	105	93	95	87	89	83	80	102	92	94	87	88	83	80	91	85
2	109	96	100	91	94	87	84	106	95	98	90	92	86	83	95	90
2.5	114	99	107	95	101	92	89	111	98	104	94	99	91	89	100	93
3	118	101	111	98	106	95	93	114	100	108	97	104	95	92	103	96
4	120	103	114	100	109	98	95	116	102	111	99	107	97	95	106	94
5	123	105	118	102	114	100	99	119	103	115	101	111	100	98	109	94
7	125	106	121	104	118	102	101	121	105	117	103	114	101	100	111	102
10	129	108	127	107	125	106	106	124	107	123	106	121	105	105	115	104

配光曲線

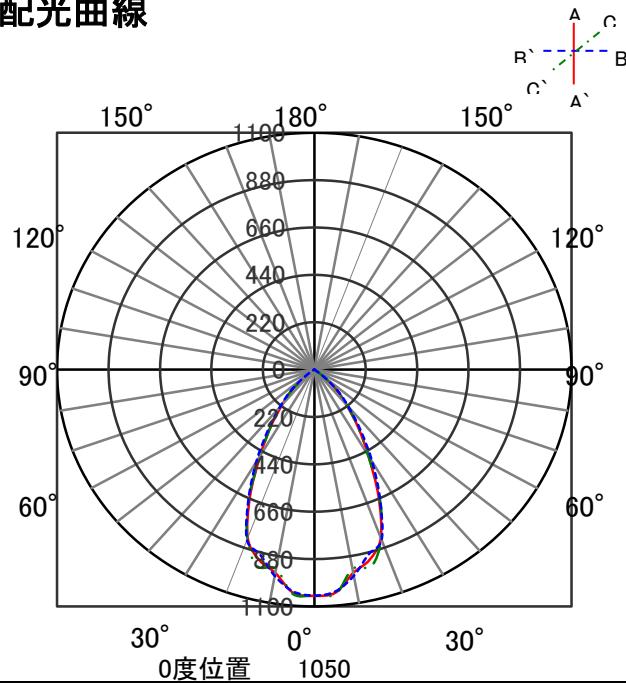

直射水平面照度

