


ECOHiLUX照明器具 配光データシート

意匠図

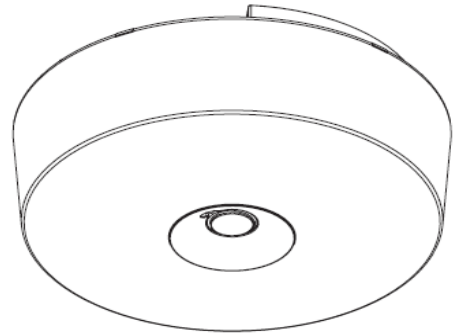


器具品名	小型シーリングライト			保守率	
器具品番	SCL6NMS-MCHL			良	0.67
部品品名	-			中	0.63
部品品番	-			否	0.56
器具光束	lm	最大取付間隔		器具効率	
光源	600	AA	1.31	上方向	11.5%
光源光束	600	BB	1.30	下方向	88.5%
				全方向	100%

照明率表

		作業面照明率(×0.01)																						
反射率(%)	天井	80								70				50				30				0		
	壁	70	50	30	10	70	50	30	10	50	30	10	50	30	10	30	10	10	30	10	10	0		
床		30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0
室指数	0.4	43	40	29	28	22	21	17	41	39	28	27	21	21	16	27	26	20	20	16	19	19	15	13
	0.6	58	54	43	41	35	33	28	56	52	42	40	34	33	28	40	38	32	32	27	31	30	26	23
	0.8	68	62	53	50	43	41	35	65	60	51	48	42	40	35	48	46	40	39	34	38	37	33	29
	1	76	69	61	57	51	49	43	73	66	59	56	50	48	42	55	53	47	46	41	45	44	39	36
	1.25	84	75	70	64	60	56	50	80	72	68	63	59	55	49	63	59	55	53	48	52	51	46	42
	1.5	90	79	76	69	66	61	55	85	76	73	67	64	60	54	68	64	60	58	53	57	55	51	46
	2	97	85	85	76	76	69	64	93	82	82	74	74	68	62	76	70	69	65	60	65	62	58	53
	2.5	103	89	92	81	84	75	70	98	86	88	79	81	74	69	81	75	75	70	66	70	67	64	59
	3	106	91	97	85	89	79	74	101	88	93	83	85	77	73	85	78	79	74	70	74	71	67	62
	4	111	95	103	89	96	85	80	106	92	99	87	92	83	79	90	83	85	79	76	79	75	73	67
5	114	97	107	92	101	88	85	109	94	103	90	97	86	83	94	86	90	82	79	83	79	76	71	
7	118	99	113	96	108	93	90	112	96	107	93	103	91	88	98	89	95	86	84	87	83	81	75	
10	121	101	117	99	113	96	94	115	98	111	96	108	94	92	101	92	99	90	88	91	86	84	78	

配光曲線

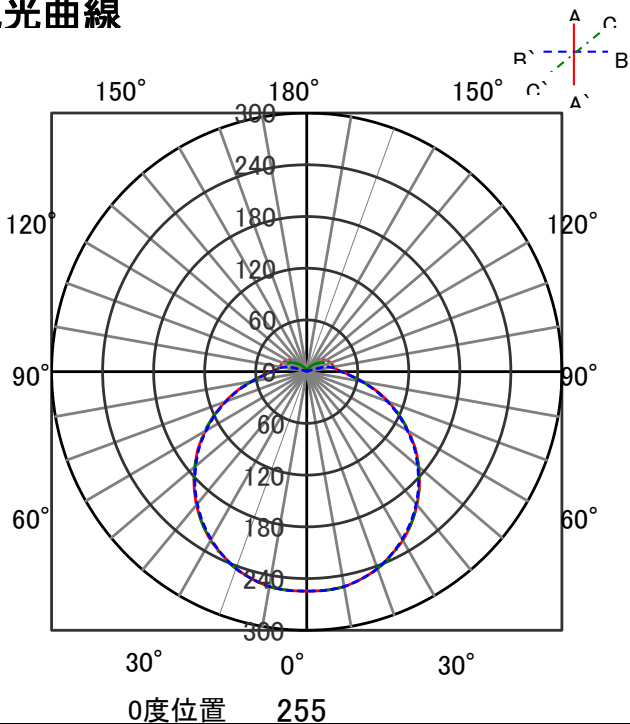

直射水平面照度

