


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LXスクエア照明 直付型			保守率	
器具品番	BL-45W-CLLXSQ47-D BL-45W-CLLXSQ47-LI BL-45W-CLLXSQ47-DA BL-45W-CLLXSQ47-IS			良	0.77
				中	0.72
				否	0.68
				器具効率	
器具光束	4470lm	最大取付間隔		上方向	0%
光源	一体型器具のため、器具光束表示	AA	1.24 H	下方向	100%
光源光束		BB	1.22 H	全方向	100%

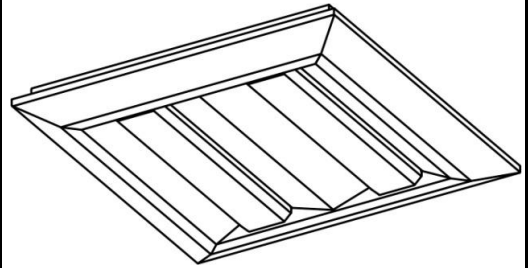

照明率表

反射率		作業面照明率(×0.01)																																															
		天井								80								70								50								30								0							
		壁		70		50		30		10		70		50		30		10		50		30		10		30		10		0																			
室 指 数	0.4	45	42	31	30	24	23	19	44	41	31	30	24	23	19	30	29	23	23	19	23	23	19	17	30	29	23	23	19	23	23	19	17																
	0.6	62	57	47	45	38	37	32	60	56	47	44	38	37	32	45	43	37	37	32	37	36	32	30	45	43	37	37	32	37	36	32	30																
	0.8	72	66	57	54	47	45	40	70	64	56	53	47	45	39	54	51	46	44	39	45	44	39	37	54	51	46	44	39	45	44	39	37																
	1	81	73	66	61	56	53	47	78	71	65	61	56	53	47	62	59	54	52	47	53	51	47	44	62	59	54	52	47	53	51	47	44																
	1.25	89	79	76	69	66	62	56	86	78	74	68	65	61	56	71	67	63	60	55	61	59	55	52	71	67	63	60	55	61	59	55	52																
	1.5	95	83	82	74	72	67	61	91	82	80	73	71	66	61	76	71	68	65	60	66	64	60	57	76	71	68	65	60	66	64	60	57																
	2	102	89	91	81	82	75	70	99	87	89	80	80	74	69	84	78	77	73	68	74	72	68	65	84	78	77	73	68	74	72	68	65																
	2.5	108	93	98	86	90	81	76	104	91	95	85	88	80	76	90	83	84	79	75	80	77	74	71	90	83	84	79	75	80	77	74	71																
	3	111	95	102	90	95	85	80	107	94	99	89	93	84	80	94	86	88	82	79	84	81	78	75	94	86	88	82	79	84	81	78	75																
	4	116	99	109	94	102	90	86	112	97	105	93	100	89	86	99	91	94	87	84	90	86	83	80	99	91	94	87	84	90	86	83	80																
5	119	101	113	97	107	93	90	115	99	109	96	104	92	90	102	93	99	91	88	94	89	87	84	102	93	99	91	88	94	89	87	84																	
7	122	103	118	100	113	98	95	118	102	114	99	110	97	94	107	97	104	95	93	98	93	91	88	107	97	104	95	93	98	93	91	88																	
10	125	105	122	103	118	101	99	120	103	117	101	115	100	98	110	99	107	98	96	101	96	94	92	110	99	107	98	96	101	96	94	92																	

配光曲線

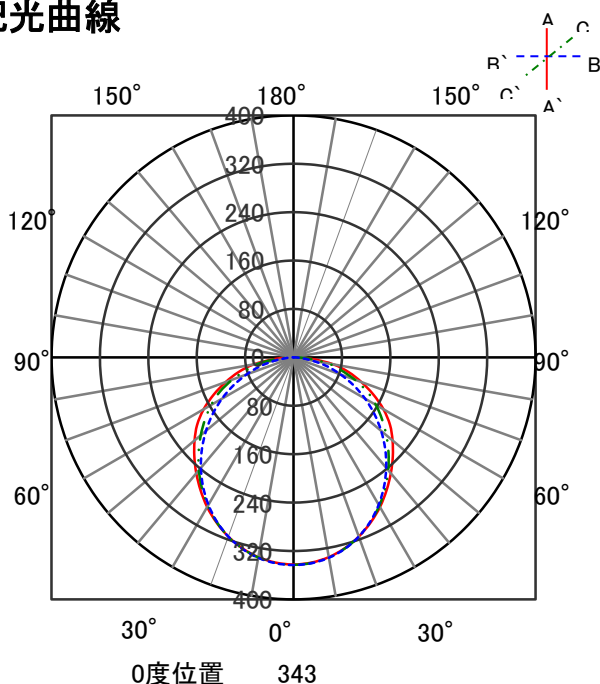

直射水平面照度

