


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	ダウンライト	保守率	
器具品番	IRLDDL12WW-30D1W	良	-
部品品名	-	中	-
部品品番	-	否	-
		器具効率	
器具光束	1100lm	上方向	0%
光源	-	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

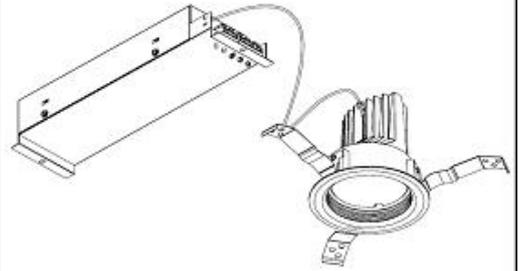

照明率表

		作業面照明率(×0.01)																						
反射率	天井	80				70				50				30				0						
		壁	70	50	30	10	70	50	30	10	50	30	10	30	10	10	30	10	0					
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	10	30	10	10	0		
室 指 数	0.4	62	58	51	49	45	44	40	61	57	50	49	44	44	40	50	48	44	43	40	44	43	40	39
	0.6	80	74	69	66	62	60	57	79	73	68	65	62	60	57	67	64	61	60	57	61	59	56	55
	0.8	90	82	80	75	73	70	66	88	81	79	74	72	69	66	77	73	71	69	66	70	68	65	64
	1	97	87	87	80	80	76	72	95	86	85	80	79	75	72	83	79	77	75	72	76	74	71	70
	1.25	103	91	93	86	87	81	78	100	90	92	85	85	81	78	89	83	83	80	77	82	79	77	75
	1.5	107	94	98	89	91	85	81	104	93	96	88	90	84	81	92	86	87	83	81	85	82	80	78
	2	112	97	104	93	98	90	87	109	96	102	92	96	89	86	97	91	93	88	85	90	87	85	83
	2.5	115	99	109	96	103	93	90	112	98	106	95	101	92	90	101	93	97	91	89	93	90	88	86
	3	118	101	112	98	107	95	93	114	100	109	97	104	95	92	103	95	100	93	91	96	92	90	88
	4	121	103	116	101	112	99	97	117	102	113	100	109	98	96	107	98	104	96	95	99	95	93	91
5	123	104	119	102	116	101	99	119	103	115	101	112	100	98	109	99	107	98	97	101	96	95	93	
7	125	105	123	104	120	103	102	121	104	119	103	116	102	101	112	101	110	100	100	104	99	98	95	
10	127	106	125	106	124	105	104	123	105	121	105	120	104	103	113	103	112	102	102	106	100	100	97	

配光曲線

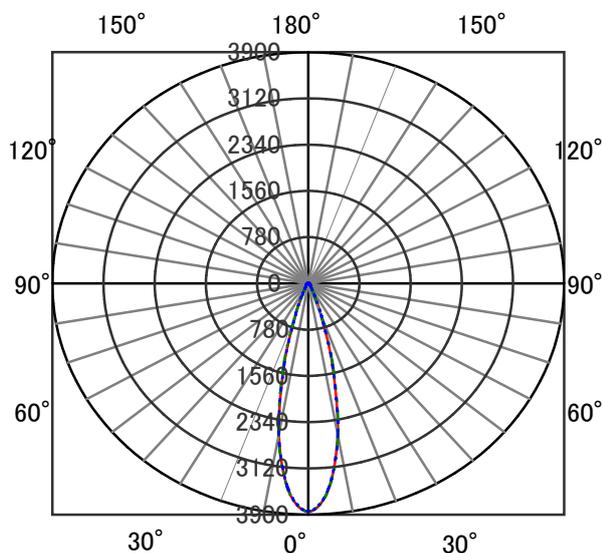

直射水平面照度

