


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	ダウンライト	保守率	
器具品番	IRLDDL12L30-30D1W	良	-
部品品名	-	中	-
部品品番	-	否	-
器具光束	1080lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

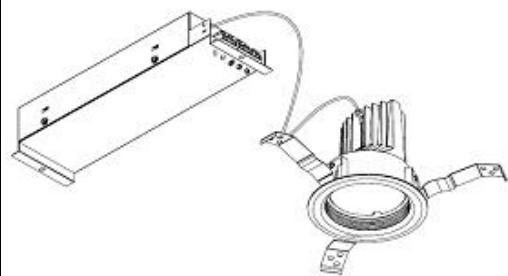

照明率表

作業面照明率(×0.01)																			
反射率	天井	80				70				50				30				0	
	壁	70	50	30	10	70	50	30	10	50	30	10	30	10	30	10	30	10	
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	0
室 指 数	0.4	62	58	51	49	45	44	40	61	57	50	49	44	44	40	50	48	44	43
	0.6	80	74	69	66	62	60	57	79	73	68	65	62	60	57	67	64	61	59
	0.8	90	82	80	75	73	70	66	88	81	79	74	72	69	66	77	73	71	69
	1	97	87	87	80	80	76	72	95	86	85	80	79	75	72	83	79	77	75
	1.25	103	91	93	86	87	81	78	100	90	92	85	85	81	78	89	83	80	77
	1.5	107	94	98	89	91	85	81	104	93	96	88	90	84	81	92	86	87	83
	2	112	97	104	93	98	90	87	109	96	102	92	96	89	86	97	91	93	88
	2.5	115	99	109	96	103	93	90	112	98	106	95	101	92	90	101	93	97	91
	3	118	101	112	98	107	95	93	114	100	109	97	104	95	92	103	95	100	93
	4	121	103	116	101	112	99	97	117	102	113	100	109	98	96	107	98	104	95
5	123	104	119	102	116	101	99	119	103	115	101	112	100	98	109	99	107	98	95
	7	125	105	123	104	120	103	102	121	104	119	103	116	102	101	112	101	110	100
10	127	106	125	106	124	105	104	123	105	121	105	120	104	103	113	103	112	102	106
	10	127	106	125	106	124	105	104	123	105	121	105	120	104	103	113	103	112	102

配光曲線

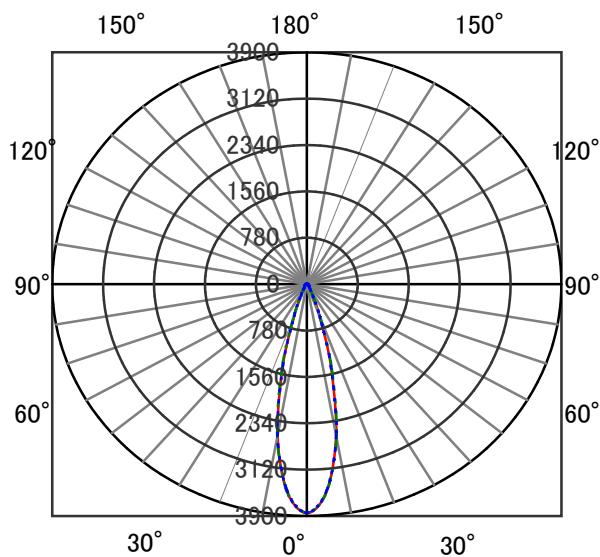

直射水平面照度

