


## ECOHiLUX照明器具 配光データシート

## 意匠図

器具品名	ダウンライト	保守率	
器具品番	IRLDUV40WW-60D1W	良	-
部品品名	-	中	-
部品品番	-	否	-
器具光束	3680lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

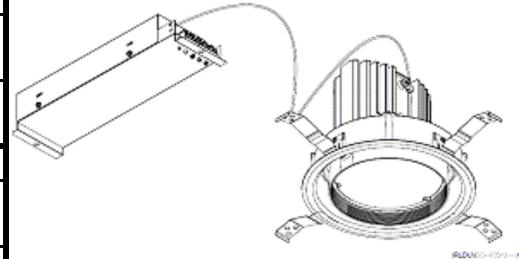

## 照明率表

作業面照明率(×0.01)

反射率	天井	80								70								50								0			
		壁		70		50		30		10		70		50		30		10		50		30		10		30		10	
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10
室 指 数	0.4	60	56	49	47	42	41	38	59	56	48	46	42	41	38	47	46	42	41	37	41	41	37	36					
	0.6	79	72	67	64	60	58	54	77	71	66	63	59	58	54	65	62	59	57	54	58	57	54	52					
	0.8	89	81	78	73	71	68	64	87	80	77	73	70	67	64	75	71	69	67	63	68	66	63	61					
	1	96	87	86	79	78	74	70	94	85	84	79	77	74	70	82	77	76	73	70	74	72	69	68					
	1.25	103	91	93	85	86	80	77	100	90	91	84	84	80	76	88	83	82	79	76	81	78	75	74					
	1.5	107	94	98	89	91	84	81	104	93	96	88	89	84	80	92	86	87	83	80	85	82	79	77					
	2	113	98	105	93	98	90	86	109	97	102	93	96	89	86	98	91	93	88	85	90	87	84	82					
	2.5	117	100	109	97	104	93	91	113	99	107	96	101	93	90	102	94	97	91	89	94	90	88	86					
	3	119	102	113	99	107	96	93	115	101	110	98	105	95	93	104	96	101	94	92	96	92	91	88					
	4	122	104	117	102	113	99	97	118	103	114	101	110	98	97	108	99	105	97	95	100	95	94	92					
	5	125	105	120	103	117	102	100	120	104	117	102	113	101	99	110	100	108	99	98	102	97	96	94					
	7	127	107	124	105	121	104	103	123	106	120	104	118	103	102	113	102	111	101	100	105	99	99	96					
	10	129	108	127	107	125	106	105	124	107	123	106	121	105	104	115	104	114	103	102	107	101	101	98					

## 配光曲線

## 直射水平面照度

