


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	ダウンライト	保守率	
器具品番	IRLDUV30WW-30D1W	良	-
部品品名	-	中	-
部品品番	-	否	-
		器具効率	
器具光束	2690lm	上方向	0%
光源	-	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

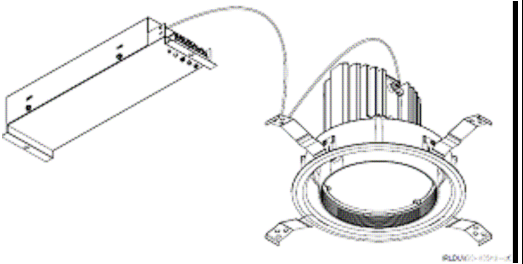

照明率表

作業面照明率(×0.01)																												
反射率	天井	80								70								50						30				0
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0
室 指 数	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
	0.4	65	61	53	52	47	46	42	64	60	53	51	47	46	42	52	51	46	46	42	46	45	42	41				
	0.6	85	78	73	69	66	64	60	83	77	72	69	65	64	60	71	68	65	63	60	64	63	59	58				
	0.8	96	87	84	79	77	74	70	94	86	83	78	76	73	70	81	77	75	73	69	74	72	69	68				
	1	103	92	92	85	84	80	76	100	91	90	84	84	80	76	88	83	82	79	76	80	78	75	74				
	1.25	109	97	99	91	92	86	83	106	96	97	90	91	86	82	94	89	88	85	82	86	84	81	79				
	1.5	113	100	104	94	97	90	86	110	98	102	93	95	89	86	98	92	93	88	85	90	87	85	83				
	2	119	103	111	99	104	95	92	115	102	108	98	102	95	92	104	96	99	93	91	96	92	90	88				
	2.5	123	106	115	102	110	99	96	119	104	113	101	107	98	95	107	99	103	97	94	99	95	93	91				
	3	125	107	119	104	114	101	99	121	106	116	103	111	100	98	110	101	106	99	97	102	97	96	94				
4	128	109	123	107	119	105	103	124	108	120	106	116	104	102	113	104	111	102	101	105	101	99	97					
5	131	110	127	109	123	107	105	126	109	123	108	120	106	105	116	105	113	104	103	108	102	101	99					
7	133	112	130	111	128	110	108	129	111	126	110	124	109	108	118	107	117	107	106	111	105	104	101					
10	135	113	133	112	131	112	111	130	112	129	111	127	110	110	121	109	119	108	108	113	106	106	103					

配光曲線

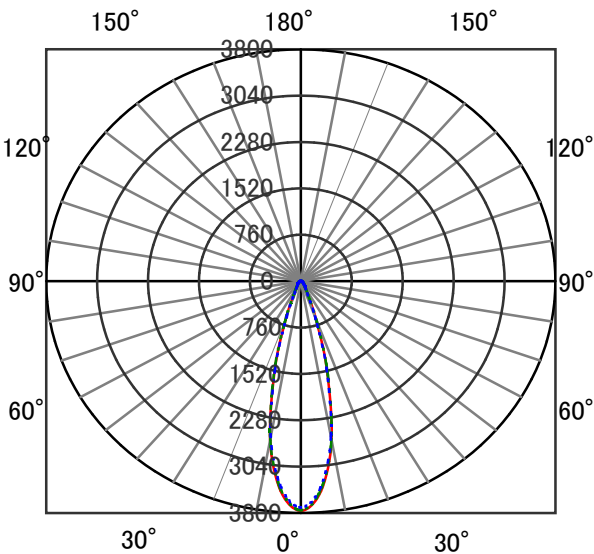

直射水平面照度

