


# ECOHiLUX照明器具 配光データシート

## 意匠図


器具品名	ダウンライト	保守率	
器具品番	IRLDDL8L30-60D1W	良	-
部品品名	-	中	-
部品品番	-	否	-
		器具効率	
器具光束	740lm	上方向	0%
光源	-	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

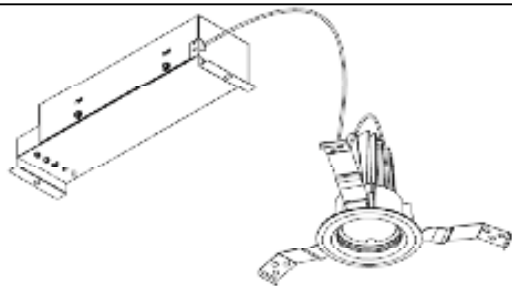

## 照明率表

		作業面照明率(×0.01)																						
反射率	天井	80				70				50				30				0						
		壁	70	50	30	10	70	50	30	10	50	30	10	30	10	10	30	10	10	0				
	床	30	10	30	10	30	10	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0		
室 指 数	0.4	58	54	47	45	41	40	36	57	54	46	45	40	36	46	44	40	39	36	40	39	36	35	
	0.6	76	70	64	61	58	56	52	74	69	64	61	57	56	62	60	57	55	52	56	55	52	50	
	0.8	86	78	75	70	68	65	62	84	77	74	70	67	65	61	72	69	66	64	61	65	64	61	59
	1	93	83	82	76	75	71	68	90	82	81	76	75	71	68	79	75	73	70	67	72	70	67	65
	1.25	99	88	89	82	82	77	74	96	87	88	81	81	77	74	85	80	79	76	73	78	75	73	71
	1.5	103	91	94	85	87	81	78	100	89	92	84	86	81	77	89	83	84	80	77	81	79	76	74
	2	108	94	100	90	94	86	83	105	93	98	89	93	86	83	94	87	89	84	82	87	83	81	79
	2.5	112	96	105	93	99	90	87	108	95	102	92	97	89	86	97	90	94	88	85	90	86	85	82
	3	114	98	108	95	103	92	90	110	97	105	94	101	91	89	100	92	96	90	88	92	88	87	85
	4	117	100	113	97	108	95	93	113	99	109	96	106	94	93	103	95	100	93	91	96	91	90	88
5	119	101	115	99	112	97	96	115	100	112	98	109	96	95	105	96	103	95	93	98	93	92	90	
7	122	102	119	101	116	100	99	117	101	115	100	113	99	98	108	98	106	97	96	101	95	95	92	
10	123	103	121	102	120	102	101	119	102	117	101	116	101	100	110	99	109	99	98	103	97	96	94	

## 配光曲線

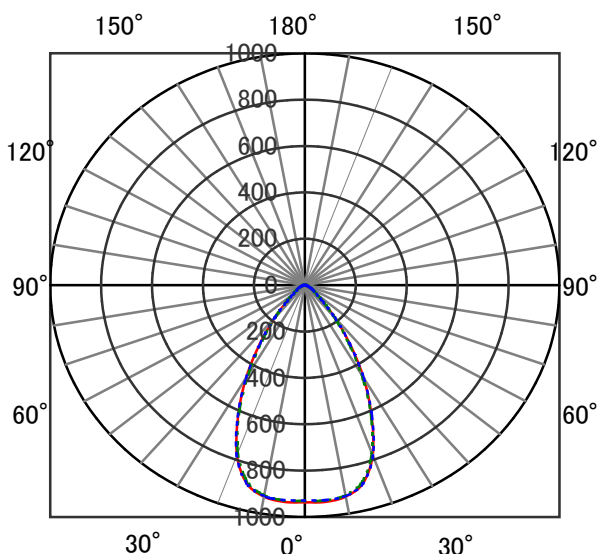

## 直射水平面照度

