

## ECOHiLUX照明器具 配光データシート

## 意匠図


器具品名	ダウンライト	保守率	
		良	-
器具品番	IRLDDL40W-30D1B	中	
部品品名	-	否	
部品品番	-	器具効率	
器具光束	3950lm	上方向	0%
光源	-	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

## 照明率表

作業面照明率(×0.01)

反射率	天井	80						70						50						30						0	
		壁		70		50		30		10		70		50		30		10		50		30		10		30	
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	10	0	
室 指 数	0.4	68	63	55	53	49	48	44	46	63	55	53	48	48	44	44	54	52	48	47	44	48	47	44	42		
	0.6	88	81	76	72	68	66	62	86	80	75	71	68	66	62	73	70	67	65	62	66	65	62	60			
	0.8	99	90	87	82	80	76	72	97	89	86	81	79	76	72	84	80	78	75	72	77	75	72	70			
	1	106	96	95	88	87	83	79	104	94	94	88	87	83	79	91	86	85	82	78	83	81	78	76			
	1.25	113	100	103	94	95	89	85	110	99	101	93	94	89	85	97	92	92	88	85	90	87	84	82			
	1.5	117	103	108	98	100	93	90	114	102	105	97	99	93	89	102	95	96	92	88	94	90	88	86			
	2	123	107	115	103	108	99	95	120	106	112	102	106	98	95	107	100	102	97	94	99	95	93	91			
	2.5	127	110	120	106	114	102	99	123	108	117	105	111	102	99	111	103	107	100	98	103	99	97	94			
	3	130	111	123	108	118	105	102	126	110	120	107	115	104	102	114	105	110	103	100	106	101	99	97			
	4	133	113	128	111	124	109	107	129	112	124	110	120	108	106	118	108	115	106	104	109	104	103	100			
	5	136	115	131	113	127	111	109	131	113	127	112	124	110	108	120	109	118	108	107	112	106	105	102			
	7	138	116	135	115	132	114	113	134	115	131	114	128	113	112	123	112	121	111	110	115	109	108	105			
	10	140	117	138	117	136	116	115	135	116	134	115	132	115	114	125	113	124	113	112	117	110	110	107			

## 配光曲線

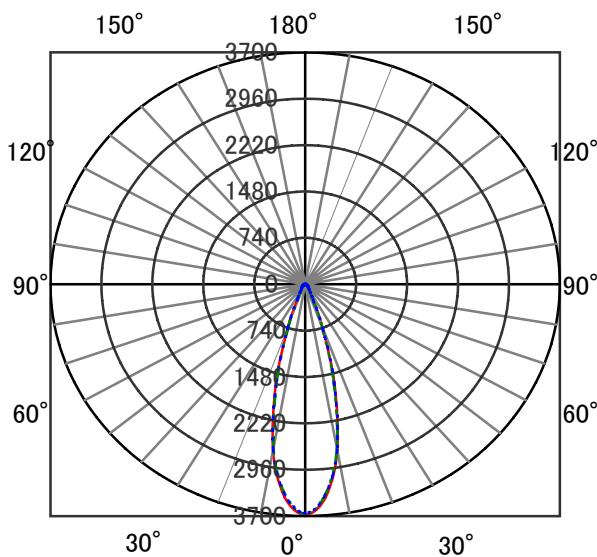

## 直射水平面照度

