


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	ダウンライト	保守率	
		良	0.78
器具品番	DL5WW-15MUB-D	中	
		否	0.74
部品品名	-	否	
		器具効率	0.70
器具光束	621lm	上方向	0%
		下方向	100%
光源	-	光源光束	
		全方向	100%

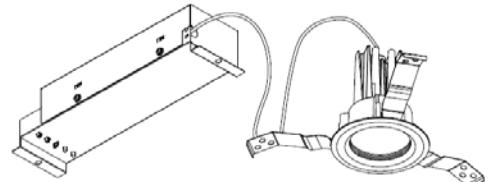

照明率表

反射率	天井	作業面照明率(×0.01)														0
		80		70		50		30		10		50		30		
		壁	70	50	30	10	70	50	30	10	30	10	30	10	30	10
室 指 数	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
	0.4	64	60	52	50	46	45	41	63	59	52	50	46	45	41	45
	0.6	83	76	71	68	64	62	59	81	75	70	67	64	62	58	62
	0.8	93	85	82	77	75	72	68	91	84	81	77	74	72	68	66
	1	100	90	90	83	82	78	74	98	89	88	82	82	78	74	72
	1.25	106	95	97	89	90	84	80	104	93	95	88	88	84	80	82
	1.5	111	97	101	92	94	88	84	108	96	99	91	93	87	84	85
	2	116	101	108	96	102	93	90	113	100	106	96	100	92	89	90
	2.5	120	103	113	99	107	96	94	116	102	110	99	105	96	93	105
	3	122	105	116	102	111	99	96	118	103	113	101	108	98	96	107
	4	125	107	121	104	116	102	100	121	105	117	103	113	101	100	108
	5	128	108	124	106	120	104	103	123	107	120	105	117	103	111	102
	7	130	109	127	108	125	107	106	126	108	123	107	121	106	105	104
	10	132	110	130	110	128	109	108	127	109	126	109	124	108	107	117

配光曲線

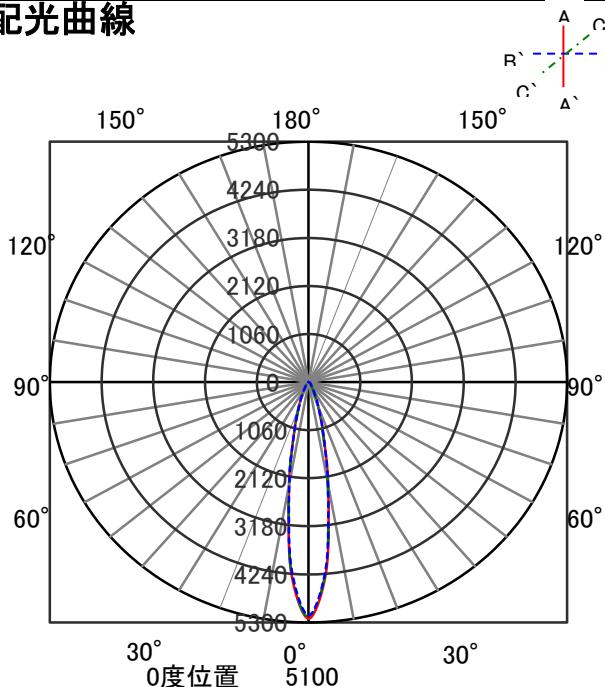

直射水平面照度

